


TC-K96R



Free service manuals

Gratis schema's

Digitized by

www.freeservicemanuals.info

AEP Model
E Model
Canadian Model
UK Model
US Model



(APE, UK, E model)

STEREO CASSETTE DECK

SPECIFICATIONS

GENERAL

- Power Requirements:** 120V ac, 60Hz (*US, Canadian model)
 110, 120, 220, or 240V ac 50/60Hz
 adjustable, (AEP, UK, E model)
- Power Consumption:** 30W (US, Canadian model)
 33W (AEP, UK, E model)
- AC Outlet:** Unswitched 300W total (US,
 Canadian model)
- Dimensions:** Approx. 460(w)x155(h)x325(d)mm
 18 1/8 (w)x6 1/8 (h)x12 7/8 (d) inches
 including projecting parts and controls
 (US, Canadian model)
 Approx. 430(w)x155(h)x325(d)mm
 17(w)x6 1/8 (h)x12 7/8 (d) inches
 including projecting parts and controls
 (AEP, UK, E model)
- Weight:** Approx. 9.4 kg, 20 lb 12 oz.
 (US, Canadian model)
 Approx. 8.5 kg, 18 lb 12 oz.
 (AEP, UK, E model)

TAPE RECORDER SECTION

- Track:** 4-track 2-channel stereo
- Fast Forward and Rewinding Time:** Approx. 90 seconds with Sony cassette
 C-60

'Dolby' and the double-D symbol are the trade marks of
 Dolby Laboratory Inc. Noise reduction system manufac-
 tured under license from Dolby Laboratory Inc.

SAFETY-RELATED COMPONENT WARNING !!

COMPONENTS IDENTIFIED BY SHADING AND MARK
 ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED
 VIEWS AND IN THE PARTS LIST ARE CRITICAL TO
 SAFE OPERATION. REPLACE THESE COMPONENTS
 WITH SONY PARTS WHOSE PART NUMBERS APPEAR
 AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS
 PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ !

LES COMPOSANTS IDENTIFIÉS PAR UN TRAMÉ ET
 UNE MARQUE ⚠ SUR LES DIAGRAMMES SCHÉ-
 MATIQUES, LES VUES EXPLOSÉES ET LA LISTE
 DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ
 DE FONCTIONNEMENT. NE REMPLACER CES
 COMPOSANTS QUE PAR DES PIÈCES SONY DONT
 LES NUMÉROS SONT DONNÉS DANS CE MANUEL
 OU DES SUPPLÉMENTS PUBLIÉS PAR SONY.

— Continued on page 2 —

SONY®

SERVICE MANUAL

Frequency Response: DOLBY NR OFF

- With Ferri-Chrome cassette
 - 20–18,000 Hz
 - 30–16,000 Hz (± 3 dB)
 - 30–16,000 Hz (DIN)
- With chromium dioxide cassette
 - 20–17,000 Hz
 - 30–15,000 Hz (± 3 dB)
 - 30–15,000 Hz (DIN)
- With standard cassette
 - 20–15,000 Hz
 - 30–13,000 Hz (DIN)

Wow and Flutter: 0.05% WRMS (NAB)
 $\pm 0.14\%$ (DIN)

S/N Ratio: DOLBY NR OFF

- With Ferri-Chrome cassette
 - 59 dB at peak level (NAB)
 - 57 dB (DIN, 1975 rev.)
 - With chromium dioxide cassette
 - 57 dB at peak level (NAB)
- DOLBY NR ON
 Improved by 5 dB at 1 kHz,
 10 dB above 5 kHz

Total Harmonic Distortion: 1.3%

Record Bias Frequency: 105 kHz

Inputs: MIC (two phone jacks)
 sensitivity 0.25mV (-70 dB)
 for a low-impedance microphone
 LINE IN (two phone jacks)
 sensitivity 77.5mV (-20 dB)
 input impedance 100k ohms

Outputs: VARIABLE LINE OUT (two
 phono jacks) output level
 0.775V (0 dB) at load impedance
 100k ohms with LINE OUT level
 control at "10"
 suitable load impedance more than
 10k ohms

FIXED LINE OUT (two phono
 jacks) output level 0.435V (-5 dB)
 at load impedance 100k ohms
 suitable load impedance more than
 10k ohms

HEADPHONES (binaural jack)
 output level -20 to -50 dB
 at load impedance 8 ohms

Other Jack: REC/PB (connector) (UK, AEP, E model)
 input impedance less than 10k ohms
 output impedance less than 10k ohms

0 dB = 0.775 V

• MODEL IDENTIFICATION

—Specification Label—

US, Canadian model


SONY	TAPECORDER		
	MODEL NO. TC-K96R		
	AC 120V	60Hz	30W
	SERIAL NO. _____		
	MADE IN JAPAN		

AEP, UK, E model


SONY	TAPECORDER		
	MODEL NO. TC-K96R		
	AC 110, 120, 220, 240V $\sim 50/60$ Hz 33W		
	SERIAL NO. _____		
	MADE IN JAPAN		

— Power Cord (E model) —

euro-plug (1-551-216-00)



parallel blade plug (1-534-754-00)



MOS IC HANDLING PRECAUTIONS

Since the insulation resistance of the oxidized film of MOS IC is generally very high and the film is extremely thin, the static electric charge on clothing or the body will cause the insulation to breakdown.

IC601 (μ PD547-022) and IC602 (TC4019P) are used for this unit. Observe the following precautions when replacing these ICs:

1. Maintain all the pins at the same potential by wrapping the IC in aluminum foil or other similar material (See Fig. 1).

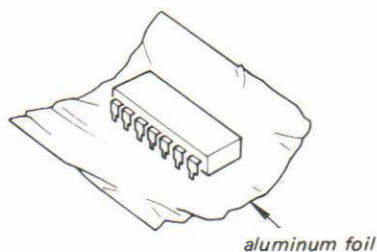


Fig. 1.

2. Ground the work bench for static electricity (See Fig. 2) (Place a sheet of aluminum onto the bench.)

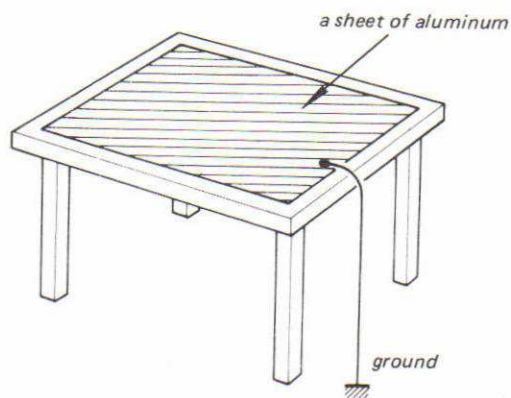


Fig. 2.

3. If necessary to touch the MOS IC direct, grasp the IC at a point other than the pins. Moreover, wear cotton gloves or a cotton finger sack. (Gloves made of nylon or other similar material are undesirable. The static electricity on your body can be easily discharged by wrapping a ground wire around your wrist.)




Fig. 3.

4. Short all the pins of the IC before beginning any work. Also ground the soldering iron.


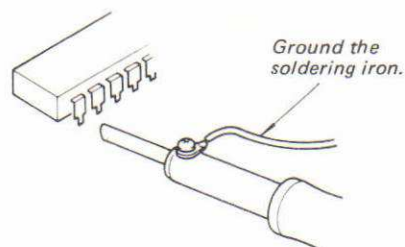



Fig. 4.

SECTION 1 OUTLINE

1-2. BLOCK DIAGRAM —Audio Amp Section—

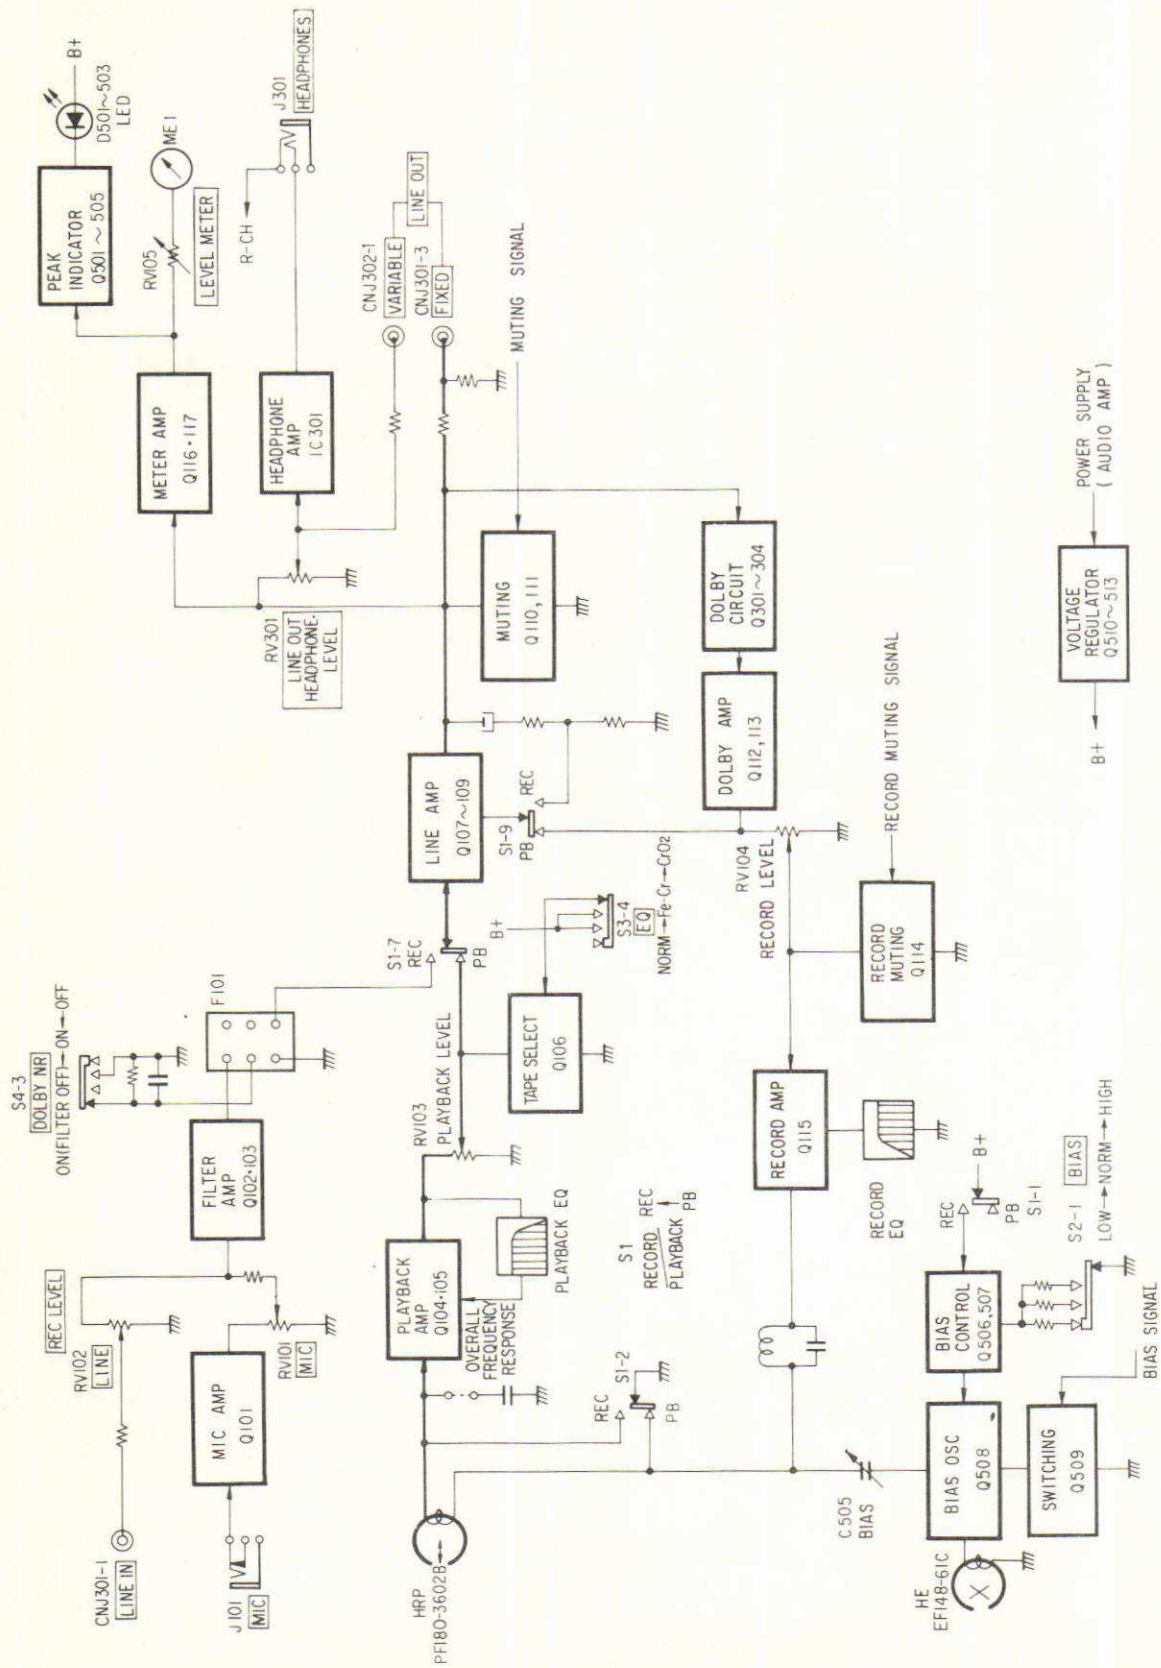

1-1. BLOCK DIAGRAM —System Control Section—

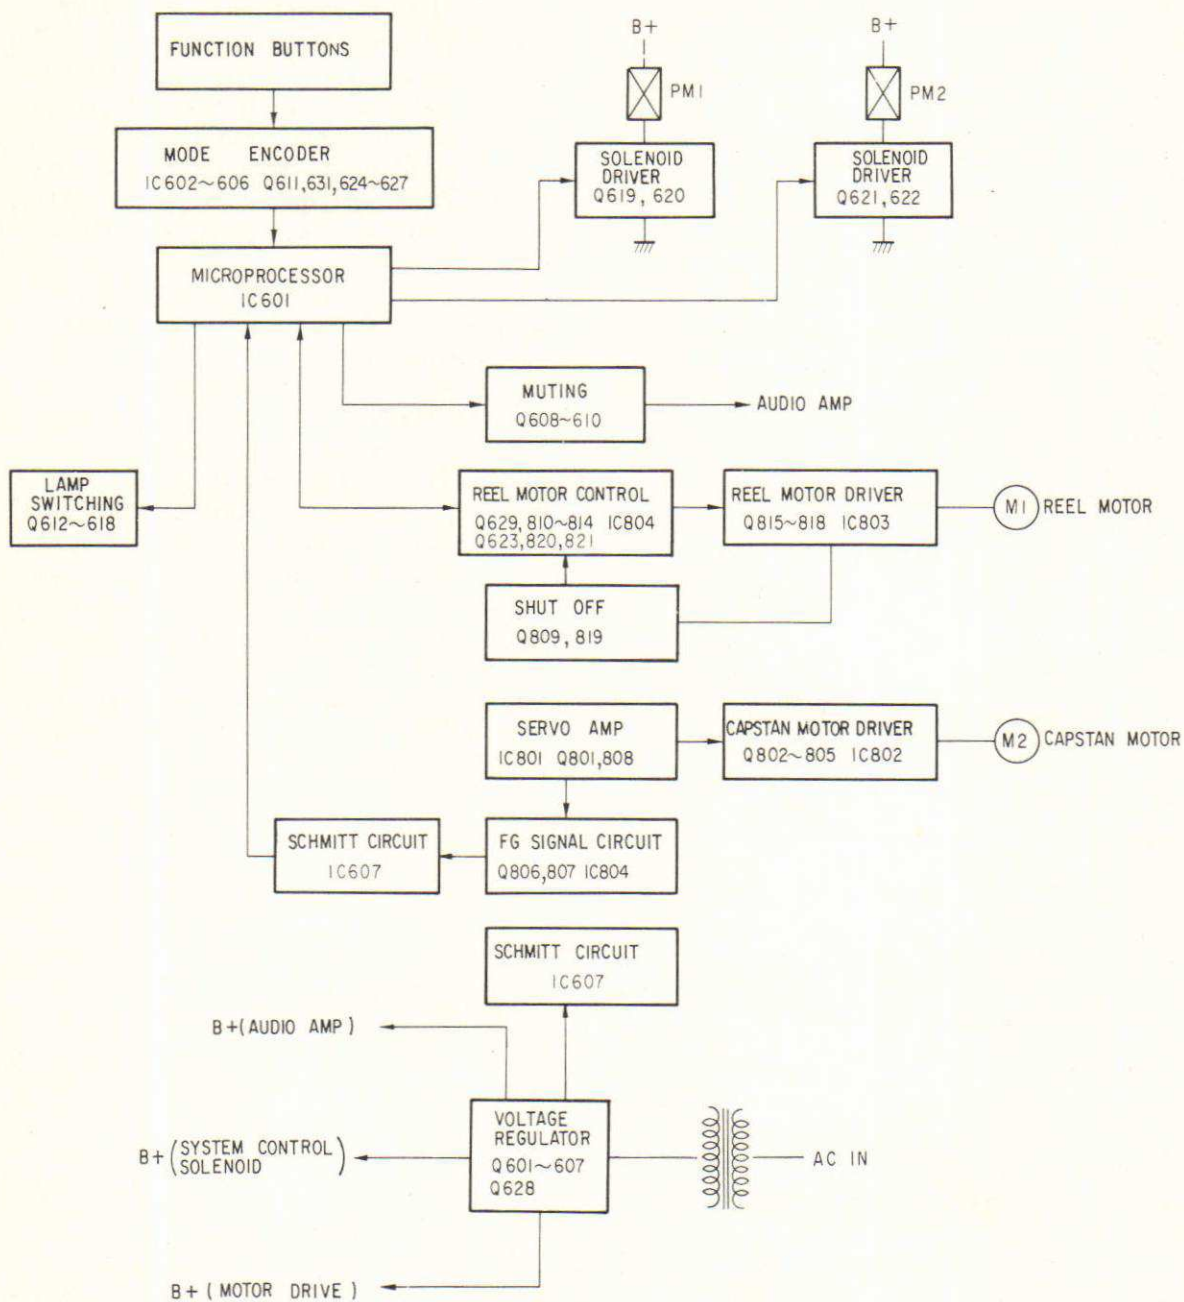

1-3. FUNCTION MECHANISM DESCRIPTION

The solenoid-driven mechanism changes modes from one to another.

Brake Release during fast forward mode and rewind mode. See Fig. 1-1.

1. Depress the function button ►► (FF) or ◄◄ (REW).
2. The plunger, which actuated by the solenoid PM2 supplied with direct current from Q622, moves in the direction shown by the arrow **A**. When the brake solenoid slider moves along with the plunger, the head trigger lever moves in the direction shown by the arrow **B** and releases the lock of the brake gear.
3. Being pulled by the spring, the brake gear turns in the direction shown by the arrow **C** and comes into the drive gear. The brake gear turns furthermore in the direction shown by the arrow **C** since the drive gear coupled with the flywheel is rotating in the direction shown by the arrow **D**.
4. When the cam pushes the brake arm (A) in the direction shown by the arrow **E**, the brake lever moves in the direction shown by the arrow **F** and releases the brake.

Note: FWD... forward FF... fast forward
REV... reverse REW... rewind

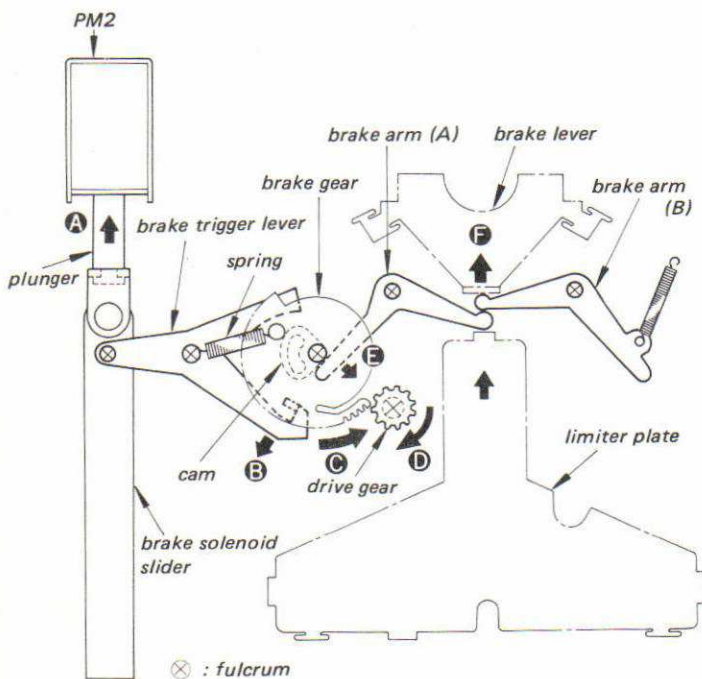


Fig. 1-1

Head Deck Drive during forward mode. See Fig. 1-2.

1. Depress the function button ► (FWD).
2. The plunger, which actuated by the solenoid PM 1 supplied with direct current from Q620, moves in the direction shown by the arrow **A**. When the head solenoid slider moves along with the plunger, the head trigger lever moves in the direction shown by the arrow **B** and releases the lock of the head gear.
3. Being pulled by the spring, the head gear turns in the direction shown by the arrow **C** and comes into the drive gear. The head gear turns furthermore in the direction shown by the arrow **C** since the drive gear coupled with the flywheel is rotating in the direction shown by the arrow **D**.
4. When the cam pushes the head arm (A) in the direction shown by the arrow **E**, the limiter plate moves in the direction shown by the arrow **F**. Thus, the head deck is lifted and the head contacts the tape.
5. With the limiter plate moving, the brake lever moves in the direction shown by the arrow **F** in Fig. 1-1 and releases the brake.

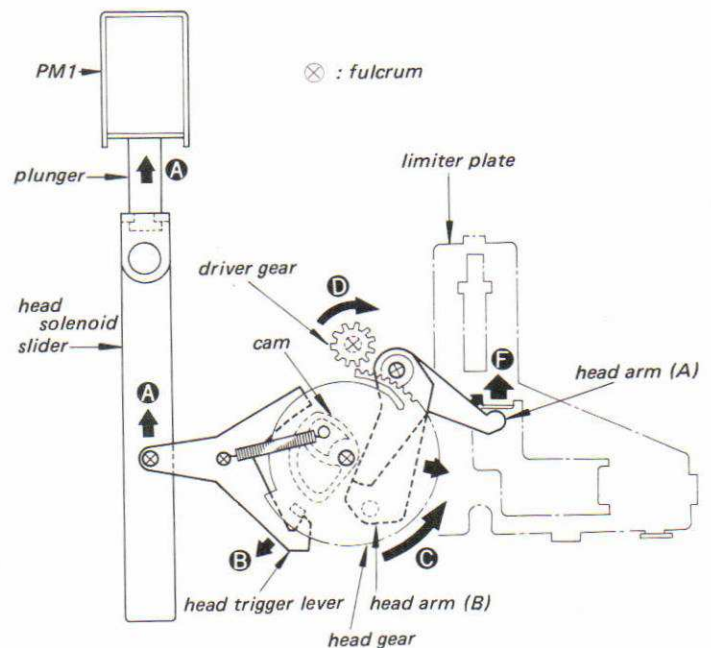


Fig. 1-2

Roto Bilateral Head Mechanism

Transition from FWD mode to REV mode.
See Fig. 1-3.

1. Depress the function button ◀ (REV) or set the DIRECTION MODE switch to make REV mode at the end of a tape in FWD mode.
 2. When the plunger is actuated by the solenoid (PM 1) supplied with direct current from Q620, the head solenoid slider moves in the direction shown by the arrow A.
 3. The head solenoid slider lifts the reverse hook lever and the head gear turns in the direction shown by the arrow B.
 4. With the head gear turning, the cam pushes the head arm (B) in the direction shown by the arrow C and the drive slider also moves in the same direction.
 5. Since the drive slider and the direction slider are connected with the reverse hook lever, the direction slider moves in the direction shown by the arrow D and the bilateral head gear is pushed in the direction shown by the arrow E.
- Consequently, the record/playback head is turned 180-degree and the REV mode is set.

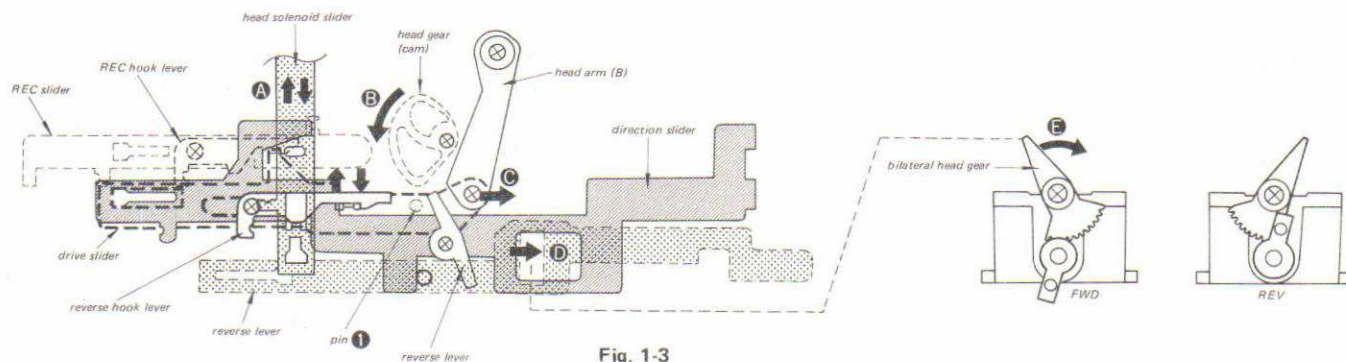


Fig. 1-3

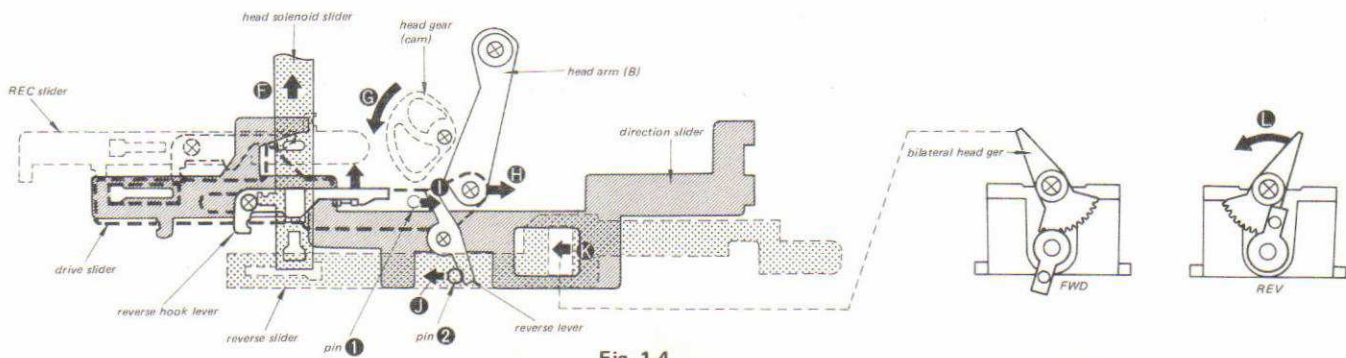


Fig. 1-4

Transition from REV mode to FWD mode
See Fig. 1-4.

1. Depress the function button ▶ (FWD) or set the DIRECTION MODE switch to make FWD mode at the end of a tape in REV mode.
2. When the plunger is actuated by the solenoid (PM 1) supplied with direct current from Q620, the head solenoid slider moves in the direction shown by the arrow F.
3. The head solenoid slider lifts the reverse hook lever and the head gear turns in the direction shown by the arrow G.
4. With the head gear turning, the cam pushes the head arm (B) in the direction shown by the arrow H and the drive slider also moves in the same direction.
5. Since the pin 1 of the drive slider pushes the reverse lever in the direction shown by the arrow I, the pin 2 is pushed in the direction shown by the arrow J and the reverse slider moves in the direction shown by the arrow K.
6. Consequently, when the bilateral head gear is pushed in the direction shown by the arrow L, the record/playback head is turned 180-degrees and the FWD mode is set.

SECTION 2 DISASSEMBLY

- Follow the disassembly procedure in the numerical order given.


TOP CASE AND FRONT PANEL REMOVAL

①—③ : TOP CASE


④—⑥ : FRONT PANEL





FUNCTION BUTTON UNIT REMOVAL

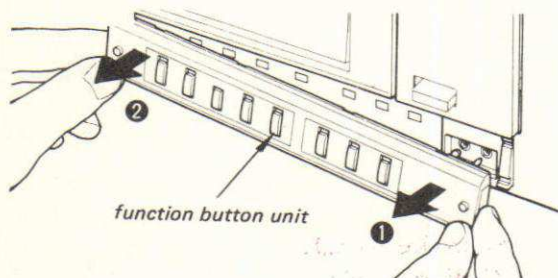

CASSETTE HOLDER LID REMOVAL

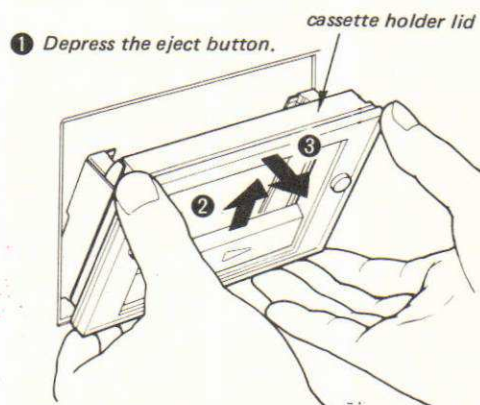

MECHANICAL BLOCK REMOVAL

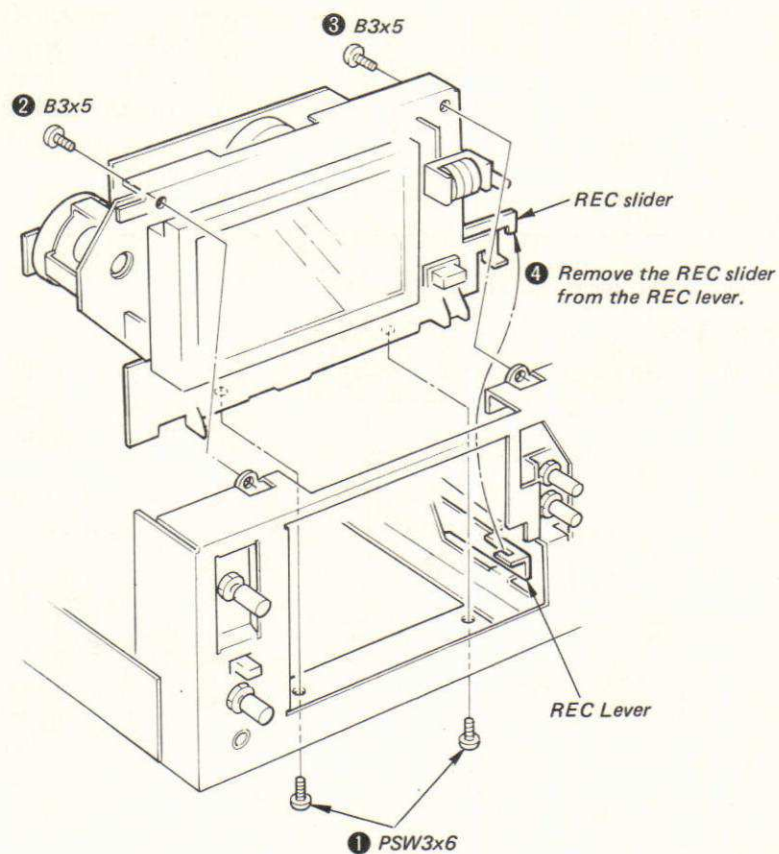

Free service manuals
Gratis schema's

Digitized by

www.freeservicemanuals.info

SECTION 3 ADJUSTMENTS

3-1. MECHANICAL ADJUSTMENTS


PRECAUTION

1. Clean the following parts with a denatured-alcohol-moistened swab:
 record/playback head pinch roller
 erase head rubber belts
 capstan idlers
2. Demagnetize the record/playback head with a head demagnetizer.
3. Do not use a magnetized screwdriver for the adjustments.
4. After the adjustments, apply a suitable locking compound to the parts adjusted.
5. The adjustments should be performed with the rated power supply voltage unless otherwise noted.

Head Height Adjustment

— Playback Mode —

1. Prepare an adjustment cassette as shown below.
2. To eliminate tape curl and tape twist in FWD and REV mode, adjust the head heights by turning the adjustment screws or inserting the shim as shown.
3. After the adjustments, apply suitable locking compound to the adjustment screws.

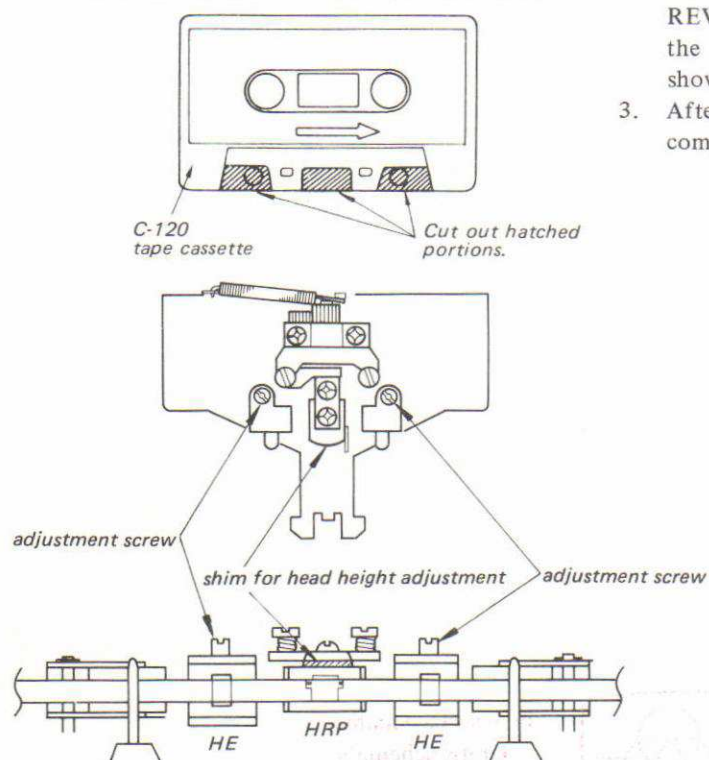


Shim, head height adjustment

3-558-328-01 $t = 0.1$



3-558-328-11 $t = 0.2$

3-558-328-21 $t = 0.15$

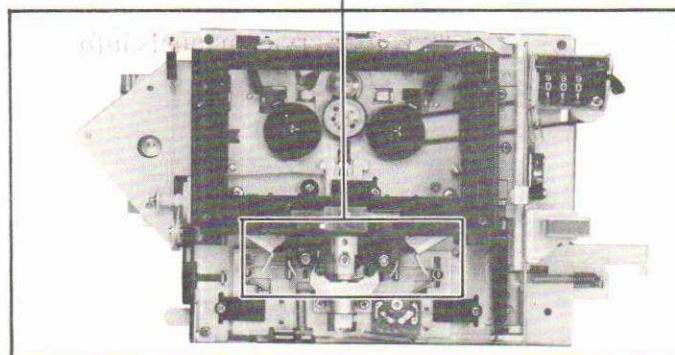


Solenoid (PM 1, 2) Position Adjustment

1. Insert the plunger of the head solenoid in the direction shown by the arrow.
2. Adjust the position of the head solenoid so that the clearance between the head gear and the head trigger lever is 0.1–0.3 mm.
3. Make sure that the lock lever A is hooked to the protrusion by half when the head gear is turned counterclockwise.
4. Release the plunger of the head solenoid (PM 1).
5. Insert the plunger of the brake solenoid in the direction shown by the arrow.
6. Adjust the position of the brake solenoid so that the clearance between the brake gear and the brake trigger lever is 0.5–1 mm.
7. Make sure that the clearance between the protrusion and the lock lever B is more than 0.2 mm.
8. Release the plunger of the brake solenoid (PM 2).

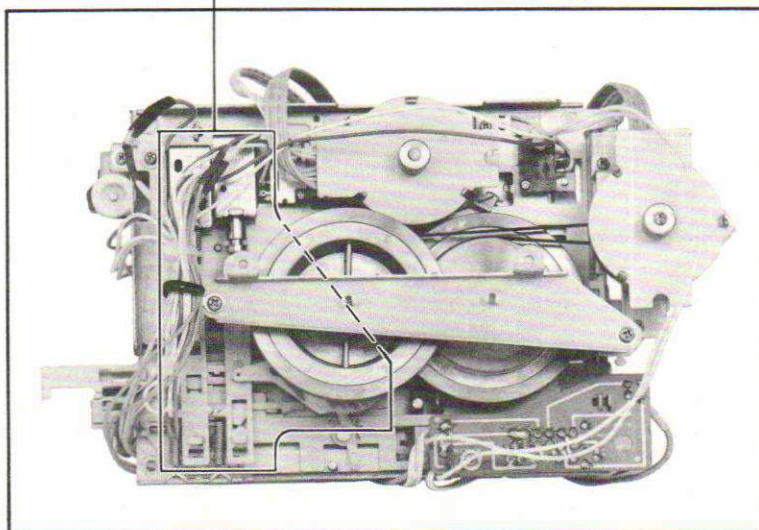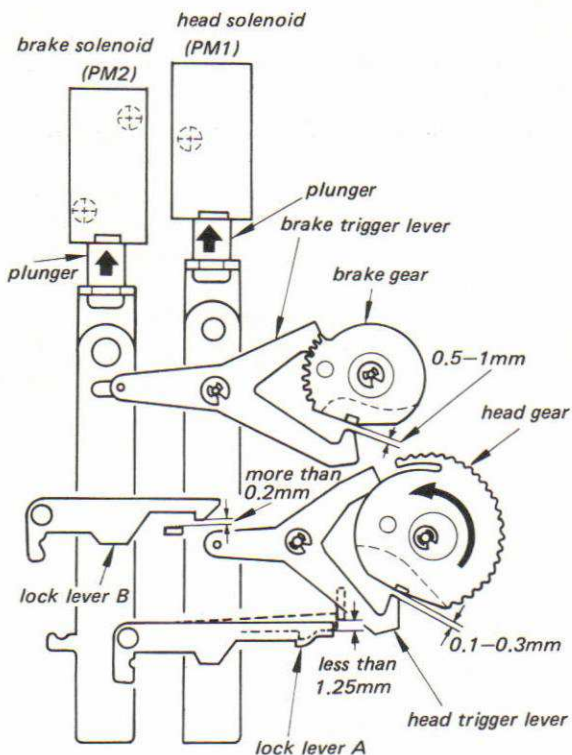

Direction Plate Position Adjustment



1. Turn the rotary-gear by hand in the direction shown by the arrow to set the head in the REV position.
2. Loosen the screw and move the direction plate in the direction shown by the arrow **A**.
3. Insert the plunger in the head solenoid and turn the flywheel (R) clockwise. Therefore the direction plate is positioned properly and then tighten the screw.
4. Release the plunger of the head solenoid.
5. Insert the plunger in the head solenoid and turn the flywheel (R) 45° in the direction shown by the arrow.

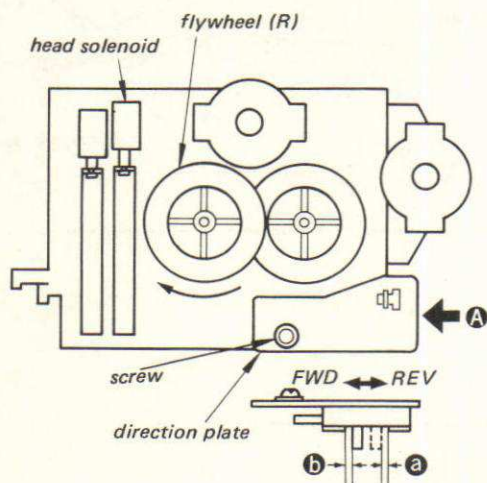

Next, release the plunger and turn the flywheel (R) 360° in the direction shown by the arrow. Once again, insert the plunger in the head solenoid and make REV mode by turning the flywheel (R).


At this moment, make sure that the clearance **a** is less than 1.5 mm and there is a clearance between the bilateral-head gear and the reverse slider.

6. Make FWD mode in the same manner as mentioned in step 3 and confirm that the clearance **b** is 0–0.5 mm and there is a clearance between the bilateral head gear and the reverse slider.

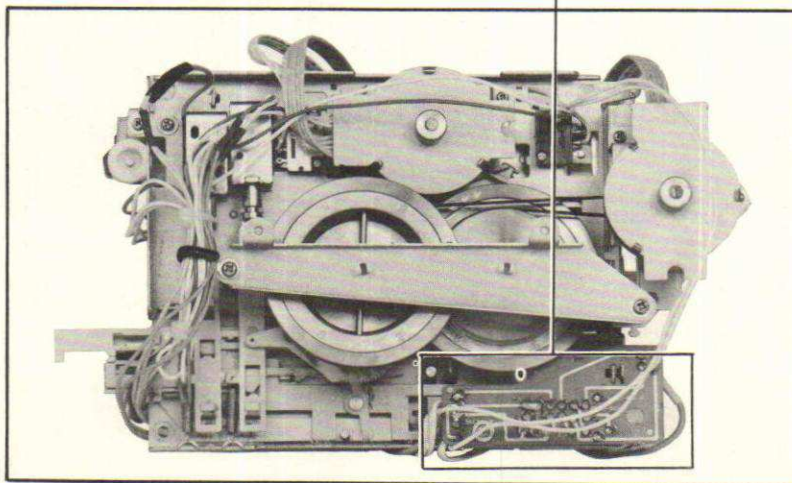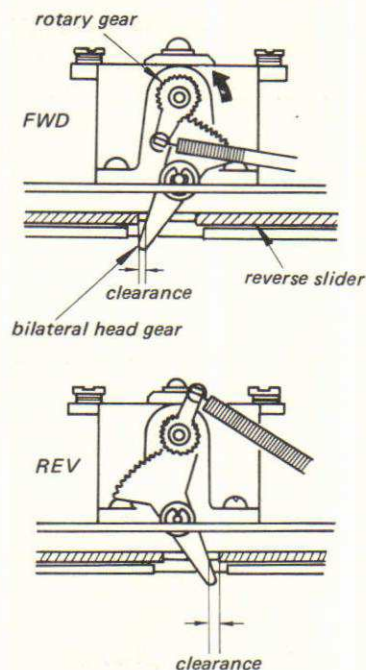


Accidental-Erasure-Proof Switch (S 21, 22) Position Adjustment

1. Install a cassette (with an erasure-proof tab).
2. Adjust the erasure proof switch position so that the clearance between REC detect lever and the erasure proof switch is 0.2–0.5 mm.



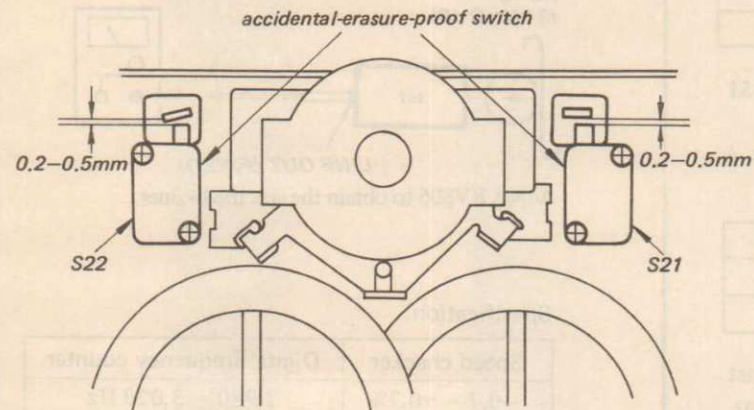
**Back Tension Torque Adjustment**

1. Install the torque meter CQ-102A and measure the back tension torque in FWD mode. Install the torque meter CQ-101A and measure the back tension torque in REV mode.
2. To meet the specified torque, change the hook position of the spring.

Specification: 3–4.5 g.cm

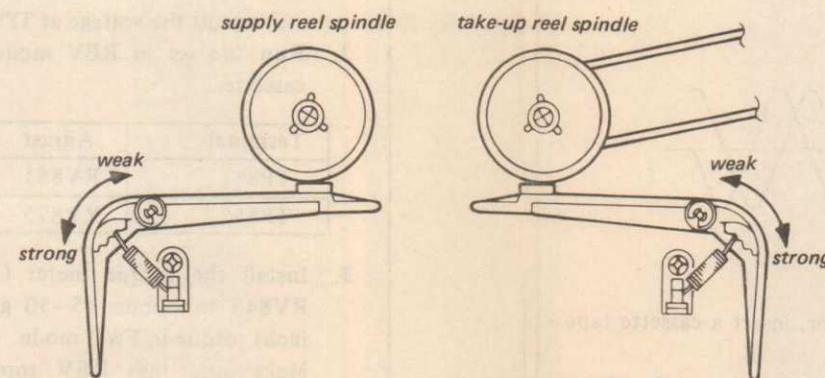**Cassette Lid Switch (S23) Position Adjustment**

Adjust the cassette lid switch position so that the clearance **A** is 0–0.4 mm when the cassette lid is opened by pushing EJECT button.

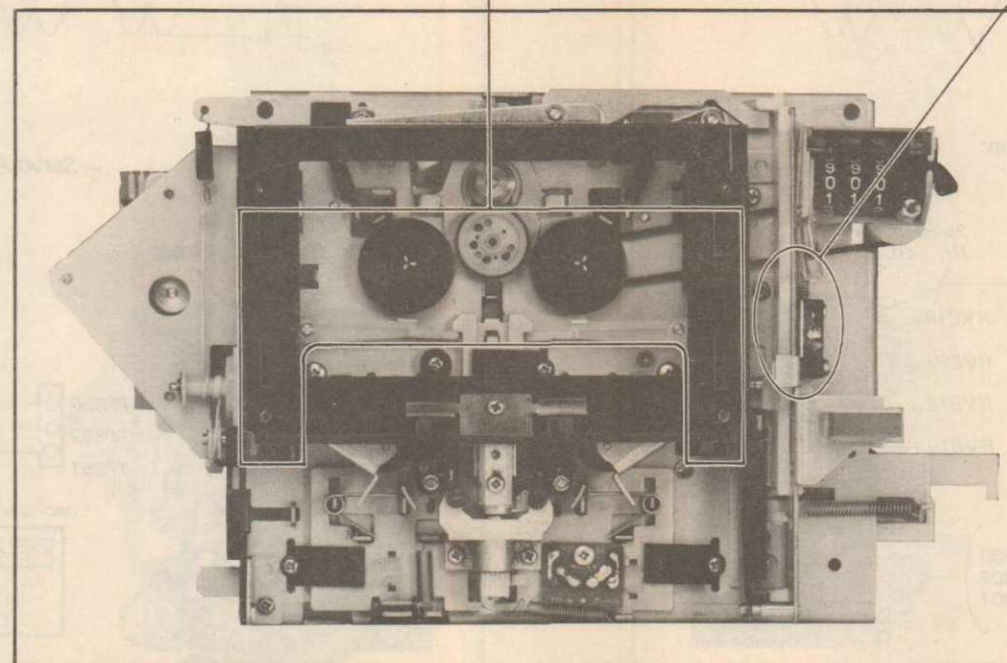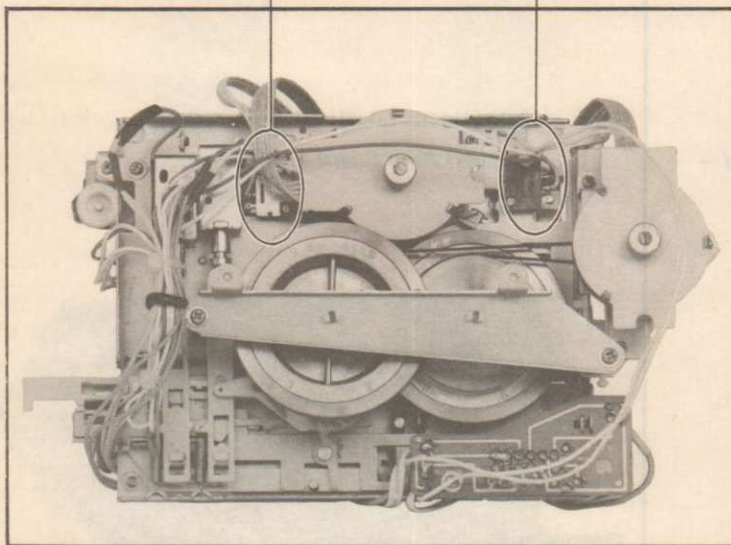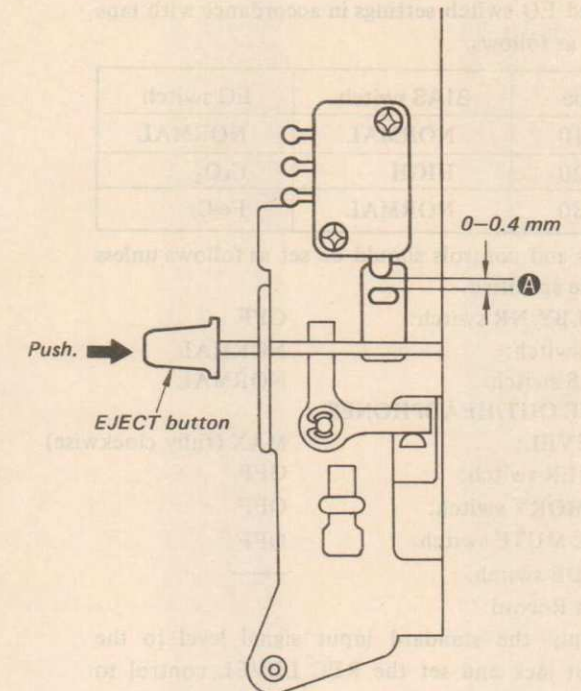**Brake Torque**

Tight side: 50–200 g.cm (0.7–2.8 oz.inch)

Slack side: 20–100 g.cm (0.28–1.4 oz.inch)

Pinch Roller Pressure

400–500 g.cm (5.56–6.95 oz.inch)

3-2. ELECTRICAL ADJUSTMENTS

Note: The adjustment should be performed in the order given in this service manual.
The adjustments should be performed for both L-CH and R-CH.

BIAS and EQ switch settings in accordance with tape used are as follows.

Tape	BIAS switch	EQ switch
CS-10	NORMAL	NORMAL
CS-20	HIGH	CrO ₂
CS-30	NORMAL	Fe-Cr

Switches and controls should be set as follows unless otherwise specified.

DOLBY NR switch:	OFF
EQ switch:	NORMAL
BIAS switch:	NORMAL
LINE OUT/HEADPHONES LEVEL:	MAX (fully clockwise)
TIMER switch:	OFF
MEMORY switch:	OFF
REC MUTE switch:	OFF
MODE switch:	—

Standard Record:

Supply the standard input signal level to the input jack and set the REC LEVEL control to obtain the standard output signal level.

Standard Input Level

	MIC	LINE IN
source impedance	300Ω	10 kΩ
input level	-60 dB (0.775mV)	-10 dB (0.25V)


Standard Output Level

	LINE OUT VARIABLE	LINE OUT FIXED	HEAD- PHONES
load impedance	100 kΩ	100 kΩ	8Ω
output level	0 dB (0.775V)	-5 dB (0.44V)	


Capstan Motor Adjustment

1. Disconnect the 2-p connector and apply 1.5V dc between IN pin of the connector and TP800.

Terminal	Adjust	Specifications
TP801	RV819	A = B
	RV810	10Vp-p
TP802	RV816	A = B
	RV809	10Vp-p

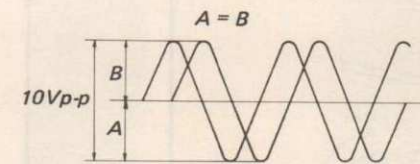


2. Plug in the 2-p connector, insert a cassette tape and set in FWD mode.
Adjust RV819 so that the positive peak voltage of TP802 equals the positive peak voltage of TP801.

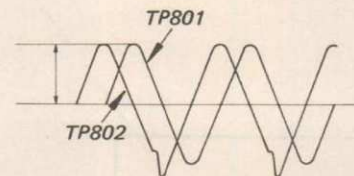

Adjustment Location:

— Servo Amp Board —

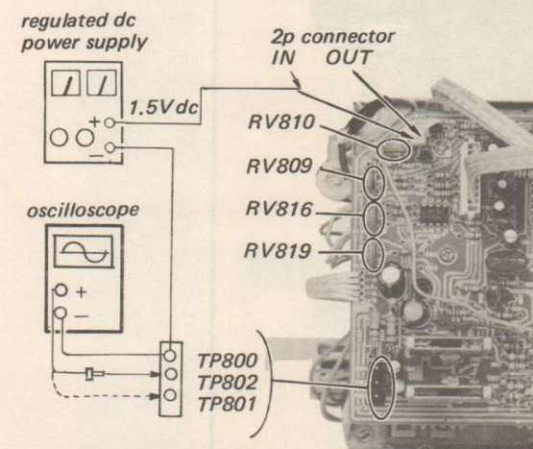

Reel Motor Adjustment

1. Run the set in FWD mode without loading a cassette.
a)


Terminal	Adjust	Specifications
TP851	RV860	A = B
TP852	RV874	A = B

- b) Adjust RV854 so that the voltage at TP851 equals the voltage at TP852.

2. Run the set in REV mode without loading a cassette.


Terminal	Adjust	Specifications
TP851	RV861	A = B
TP852	RV875	A = B

3. Install the torque meter CQ-101A and adjust RV843 to obtain 45–50 g.cm (0.62–0.69 oz. inch) torque in FWD mode.
Make sure that REV torque is 42–55 g.cm (0.58–0.76 oz. inch).
4. Install a cassette and repeat the steps 1-a and 2.

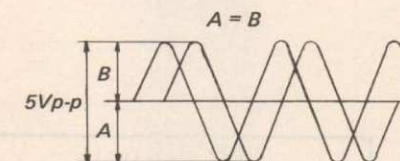

Adjustment Location:

— Servo Amp Board —

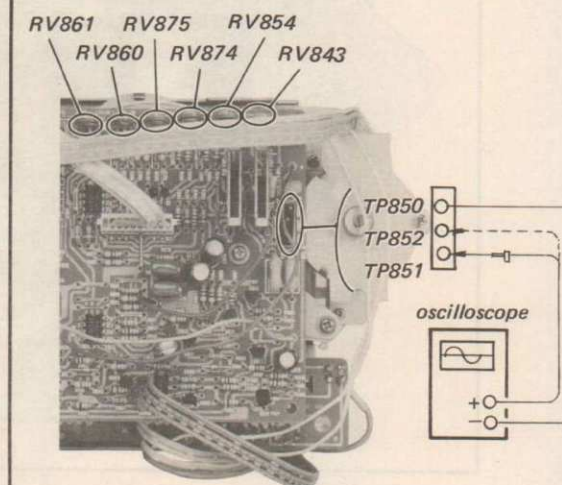


Tape Speed Adjustment

Procedure:

Mode: Playback

test tape WS-48 (3 kHz, 0 dB)

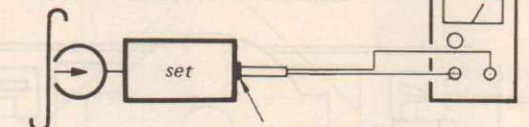

Adjust RV806 to obtain the specified values.


Specification:

Speed checker	Digital frequency counter
-0.7 - +0.7%	2,980 - 3,020 Hz

Frequency difference between beginning and end of tape should be within 0.7% (20 Hz).

Adjustment Location:

— Servo Amp Board —

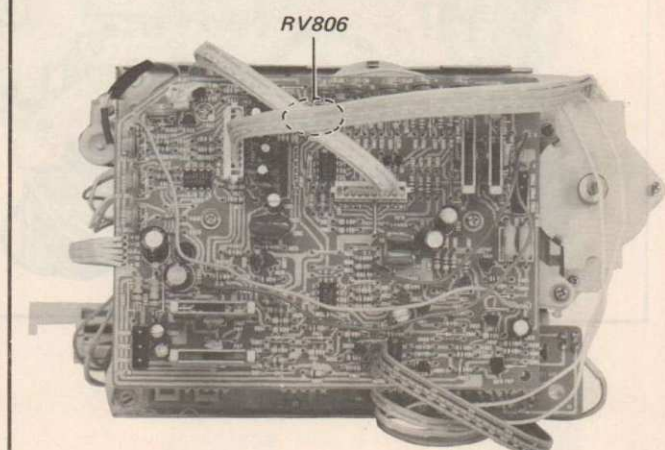


Record/playback Head Azimuth Adjustment


Procedure:

1. Mode: Playback

test tape
P-4-A81
(6.3 kHz, -10 dB)


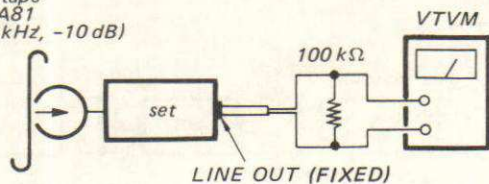


2. Turn the adjustment screw for the maximum level and set it to the mechanical mid position between L-CH and R-CH peak position.

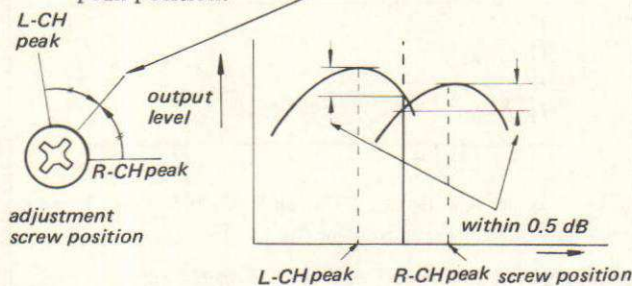


3. Mode: Playback

test tape
P-4-A81
(6.3 kHz, -10 dB)

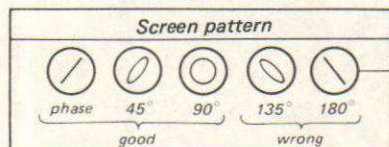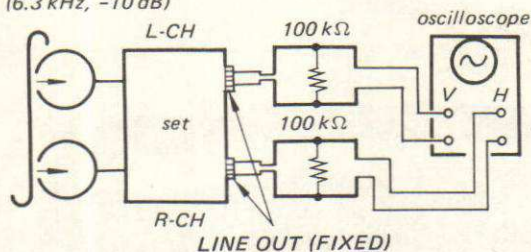

Adjustment Location:

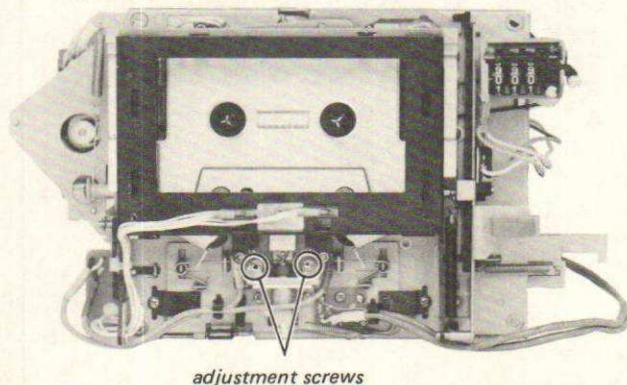


Playback Level Adjustment

Procedure:

1. Mode: Playback

P-4-L81
(333 Hz, 0 dB)

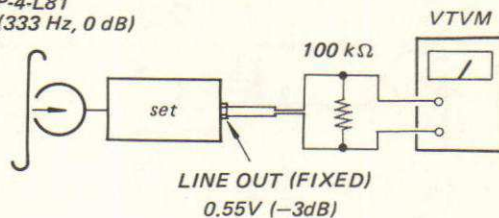

Adjust RV103 (L-CH) and RV203 (R-CH) to obtain the specified values.


Specification:

LINE OUT level: 0.52–0.58 V
(-2.5 to -3.5 dB)

Check that LINE OUT level does not change in playback mode while changing the mode from playback to stop several times.

Adjustment Location:

– Audio Amp Board –

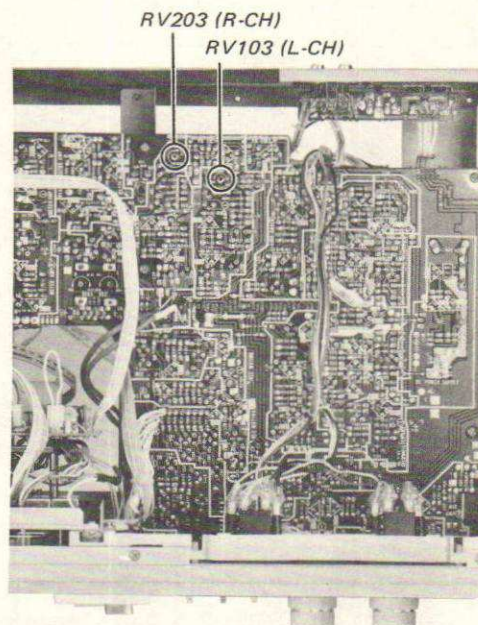


Playback Equalizer Adjustment

Procedure:

Mode: Playback

test tape
P-4-A82
(10 kHz, -10 dB)

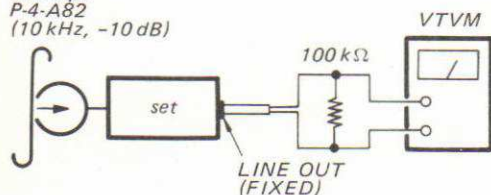


Solder or unsolder the patterns at (A) to obtain specified values.

Specification:

EQ switch	LINE OUT (FIXED) level
NORMAL	0.15 – 0.20 V (-14.5 to -11.5 dB)
Fe-Cr or Cr-O ₂	0.095 – 0.12 V (-18 to -16 dB)


Adjustment Location: – Audio Amp Board –

Bridge patterns	LINE OUT (FIXED) level
(open)	up
(A)	down

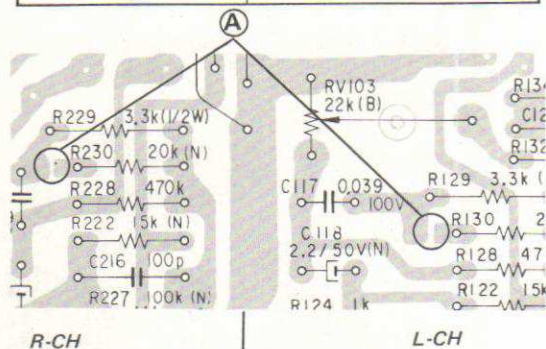

R-CH


L-CH

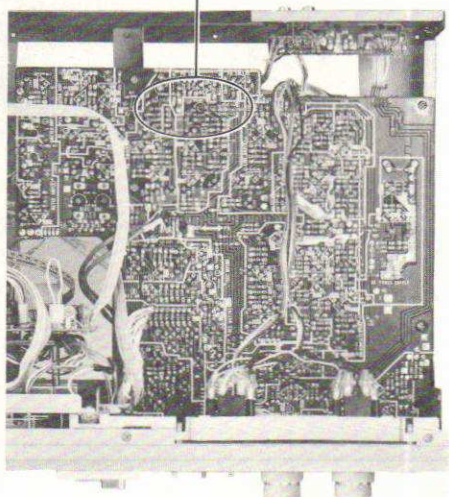

Level Meter Calibration

Procedure:


1. Mode: Standard record (See page 15.)

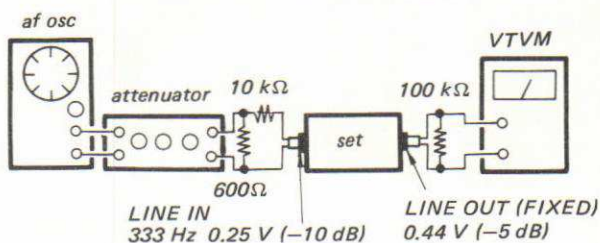

2.	Adjust	Level meter reading: 0 VU
	RV105 (L-CH) RV205 (R-CH)	

Adjust RV105 (L-CH) and RV205 (R-CH) to obtain 0 VU reading on the level meter.


Adjustment Location: – Audio Amp Board –

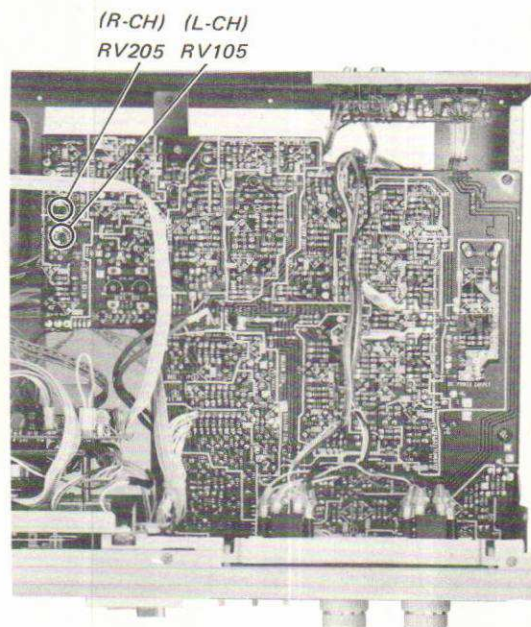


Record Bias Adjustment

Procedure:

1. Mode: Standard record (See page 15.)

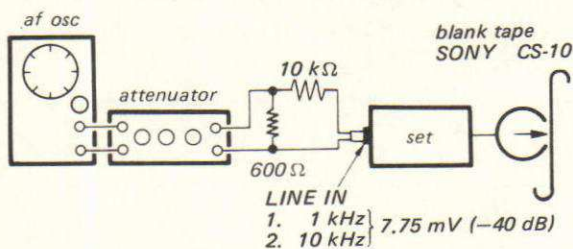

2. Mode: Playback

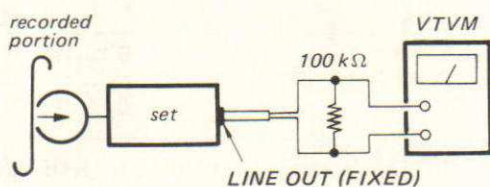


Adjust C505 (L-CH) and C506 (R-CH) to make 10 kHz and 1 kHz signal output levels equal.

Unsolder the pattern (A).

In REC•FWD mode, read the voltage across R526.


In REC•REV mode, adjust RV501 to make the voltage across R526 the same reading obtained in REC•FWD mode. After the adjustment, bridge the pattern at (A).

Adjustment Location: — Audio Amp Board —

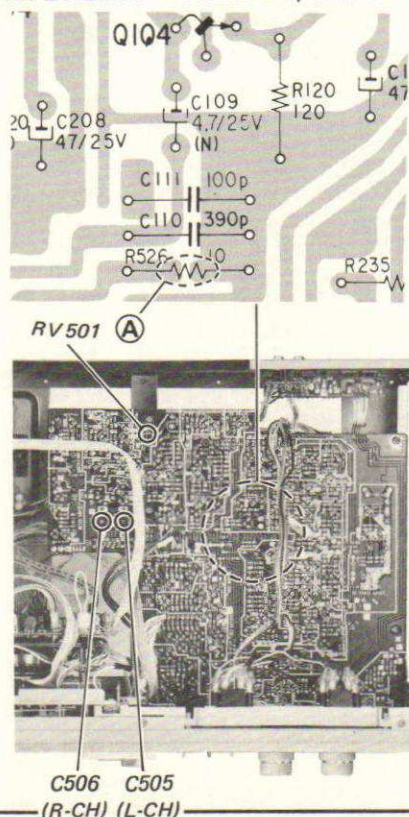
**Record Level Adjustment**

Procedure:

1. Mode: Standard record (See page 15.)

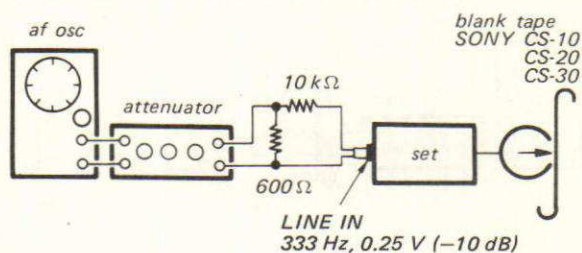

2. Mode: Playback

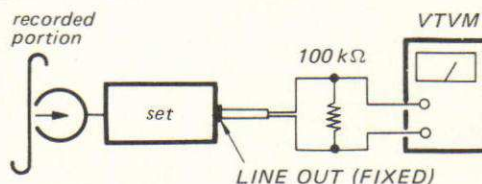


Adjust RV104 (L-CH) and RV204 (R-CH) to obtain the specified values.

Specification:

Tape	LINE OUT Level
CS-10	0.39 – 0.49 V (–6 to –4 dB)
CS-20	0.38 – 0.52 V (–6.5 to –3.5 dB)
CS-30	

Level difference between FWD and REV mode:
less than 1 dB


Adjustment Location: — Audio Amp Board—

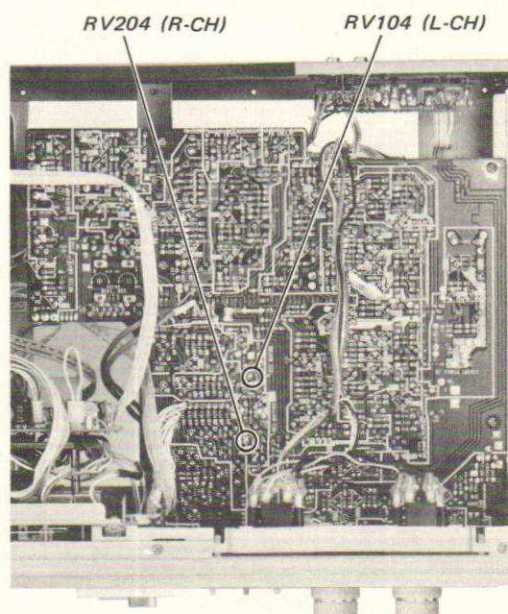


Overall Frequency Response Adjustment

Procedure:

1. Mode: Standard record (See page 15)

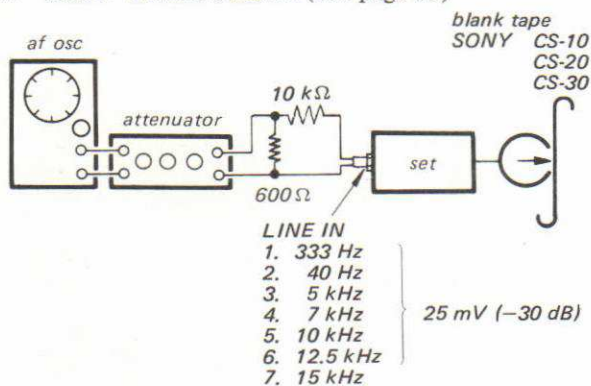

2. Mode: Playback

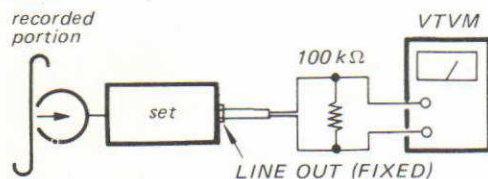



Adjustment Location —Audio Amp Board —

3. Measure the output level deviation of the each frequency from the output level of 333 Hz signal. The deviation should be as following table.

Tape freq.	CS-10	CS-20	CS-30
40 Hz 5 kHz 7 kHz 10 kHz	0 ± 2 dB		
12.5 kHz	-1 ± 3 dB	0 ± 3 dB	
15 kHz		0 ⁺³ ₋₅ dB	

If the 15 kHz level is out of the specification, adjust by bridging patterns.

patterns to be bridged for adjustment

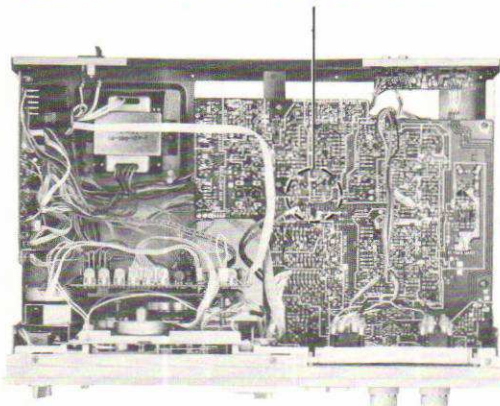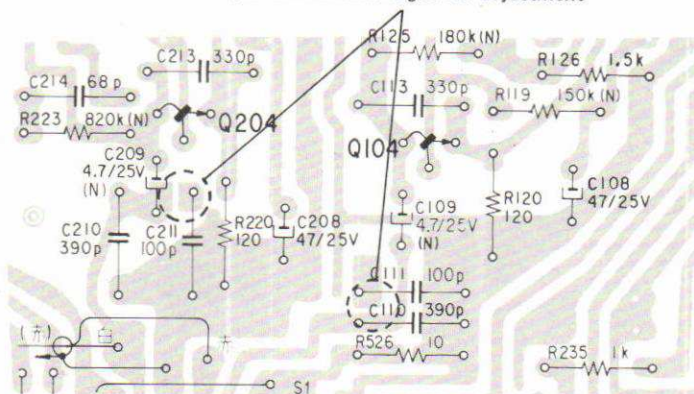


SECTION 4
DIAGRAMS



• Replacement Semiconductors

For replacement, use semiconductors except in ().


Q601 : 2SC1173








Q602 : 2SC1061 (2SC1419)

Q603, 607-619
Q621, 624-627, 631
Q801, 808, 810
Q820, 821, 629


Q604 : 2SA678





Q605, 606 : 2SB605

Q620, 622 } 2SD571
Q628Q803, 804 } 2SB548
Q816, 817Q802, 805 } 2SD414
Q815, 818Q806, 807 } 2SC1364 (2SC945)
Q809, 813

Q811, 812 : 2SC1364 (2SC634A)




Q814, 819 : 2SA678 (2SA677)

IC601 : μ PD547-022


(Top view)

IC602 : TC4019P




(Top view)

IC607 : TC4069P




(Top view)

IC801 : CX-065A




(Top view)

IC802-804 : μ PC4558C (μ PC4558)
IC603-606 : μ PC4557C (μ PC4557)



(Top view)

Note: The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

D608 : EQB01-15 (EQA01-15R)
D611 : EQB01-11Z (EQA01-11R)

D605, 606 : S1VB10

D601-604, 607 } 10E2
D609, 619, 620 }
D627 : 1S1555 (1T40)
D801-809 }
D612-618 } 1S1555
D621-623 }
D626 }

- All capacitors are in μ F unless otherwise noted. pF = μ F 50 WV or less are not indicated except for electrolytics.
- All resistors are in ohms, $\frac{1}{4}$ W unless otherwise noted. k Ω = 1000 Ω , M Ω = 1000 k Ω
- : nonflammable resistor.
- : fusible resistor.
- : B+ bus.
- : adjustment for repair.
- : B-bus.

• Voltages are dc with respect to ground unless otherwise noted.

• Readings are taken under no signal conditions with a VOM (20 k Ω /V).

- : Forward
- : Fast Forward
- : Reverse
- : Rewind

no mark: stop


[] : Voltages taken from the indicated points to the ground of servo amplifier circuit in forward mode.

Note:

The ground of servo amplifier circuit is isolated from the chassis ground which has zero potential. The difference in voltage between these two grounds is approximately 10V.

- Voltage variations may be noted due to normal production tolerances.

4-1. SCHEMATIC DIAGRAM—Servo Amp Section—

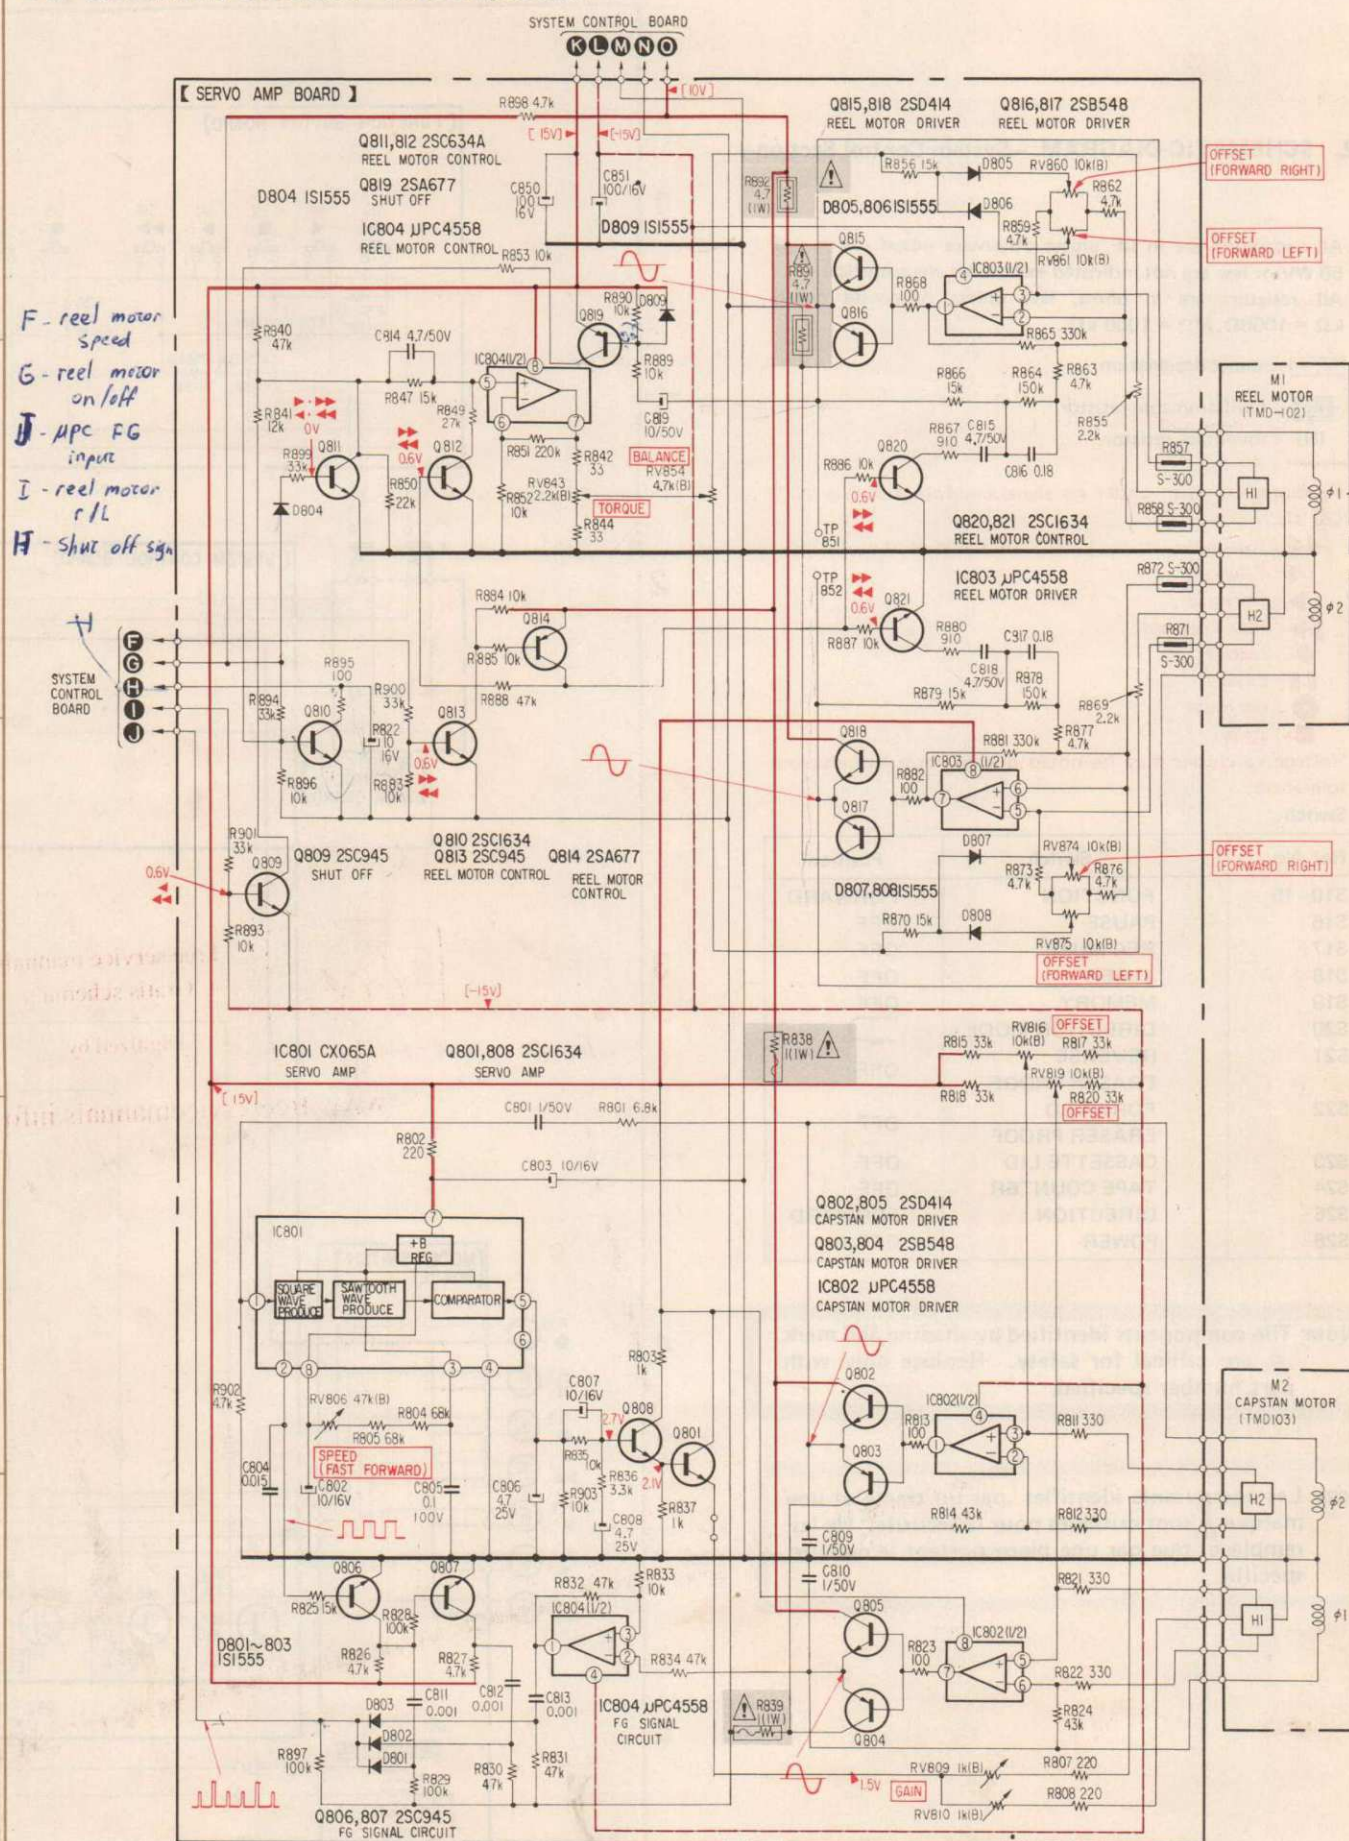

2-2. SCHEMATIC DIAGRAM —System Control Section—

- All capacitors are in μF unless otherwise noted. $\text{pF} = \mu\text{F}$ 50 WV or less are not indicated except for electrolytics.
- All resistors are in ohms, $\frac{1}{4}\text{W}$ unless otherwise noted. $\text{k}\Omega = 1000\Omega$, $\text{M}\Omega = 1000\text{ k}\Omega$

- : panel designation
- : nonflammable resistor.
- (N) : low-noise resistor.
- : B + fus.
- Readings are taken under no signal conditions with a VOM (20 $\text{k}\Omega/\text{V}$).

- : Rewind
- : Reverse
- : Forward
- : Fast Forward
- : record
- : pause
- : rec mute
- : stop

- Voltage variations may be noted due to normal production tolerances.
- Switch

Ref. No.	Switch	Position
S10-15	FUNCTION	FORWARD
S16	PAUSE	OFF
S17	REC MUTE	OFF
S18	TIMER	OFF
S19	MEMORY	OFF
S20	DIRECTION MODE	OFF
S21	REVERSE	OFF
S22	ERASER PROOF	OFF
S23	FORWARD	OFF
S24	ERASER PROOF	OFF
S25	CASSETTE LID	OFF
S26	TAPE COUNTER	OFF
S27	DIRECTION	FORWARD
S28	POWER	OFF

Note: The components identified by shading and mark are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.


1

2


3

4

5

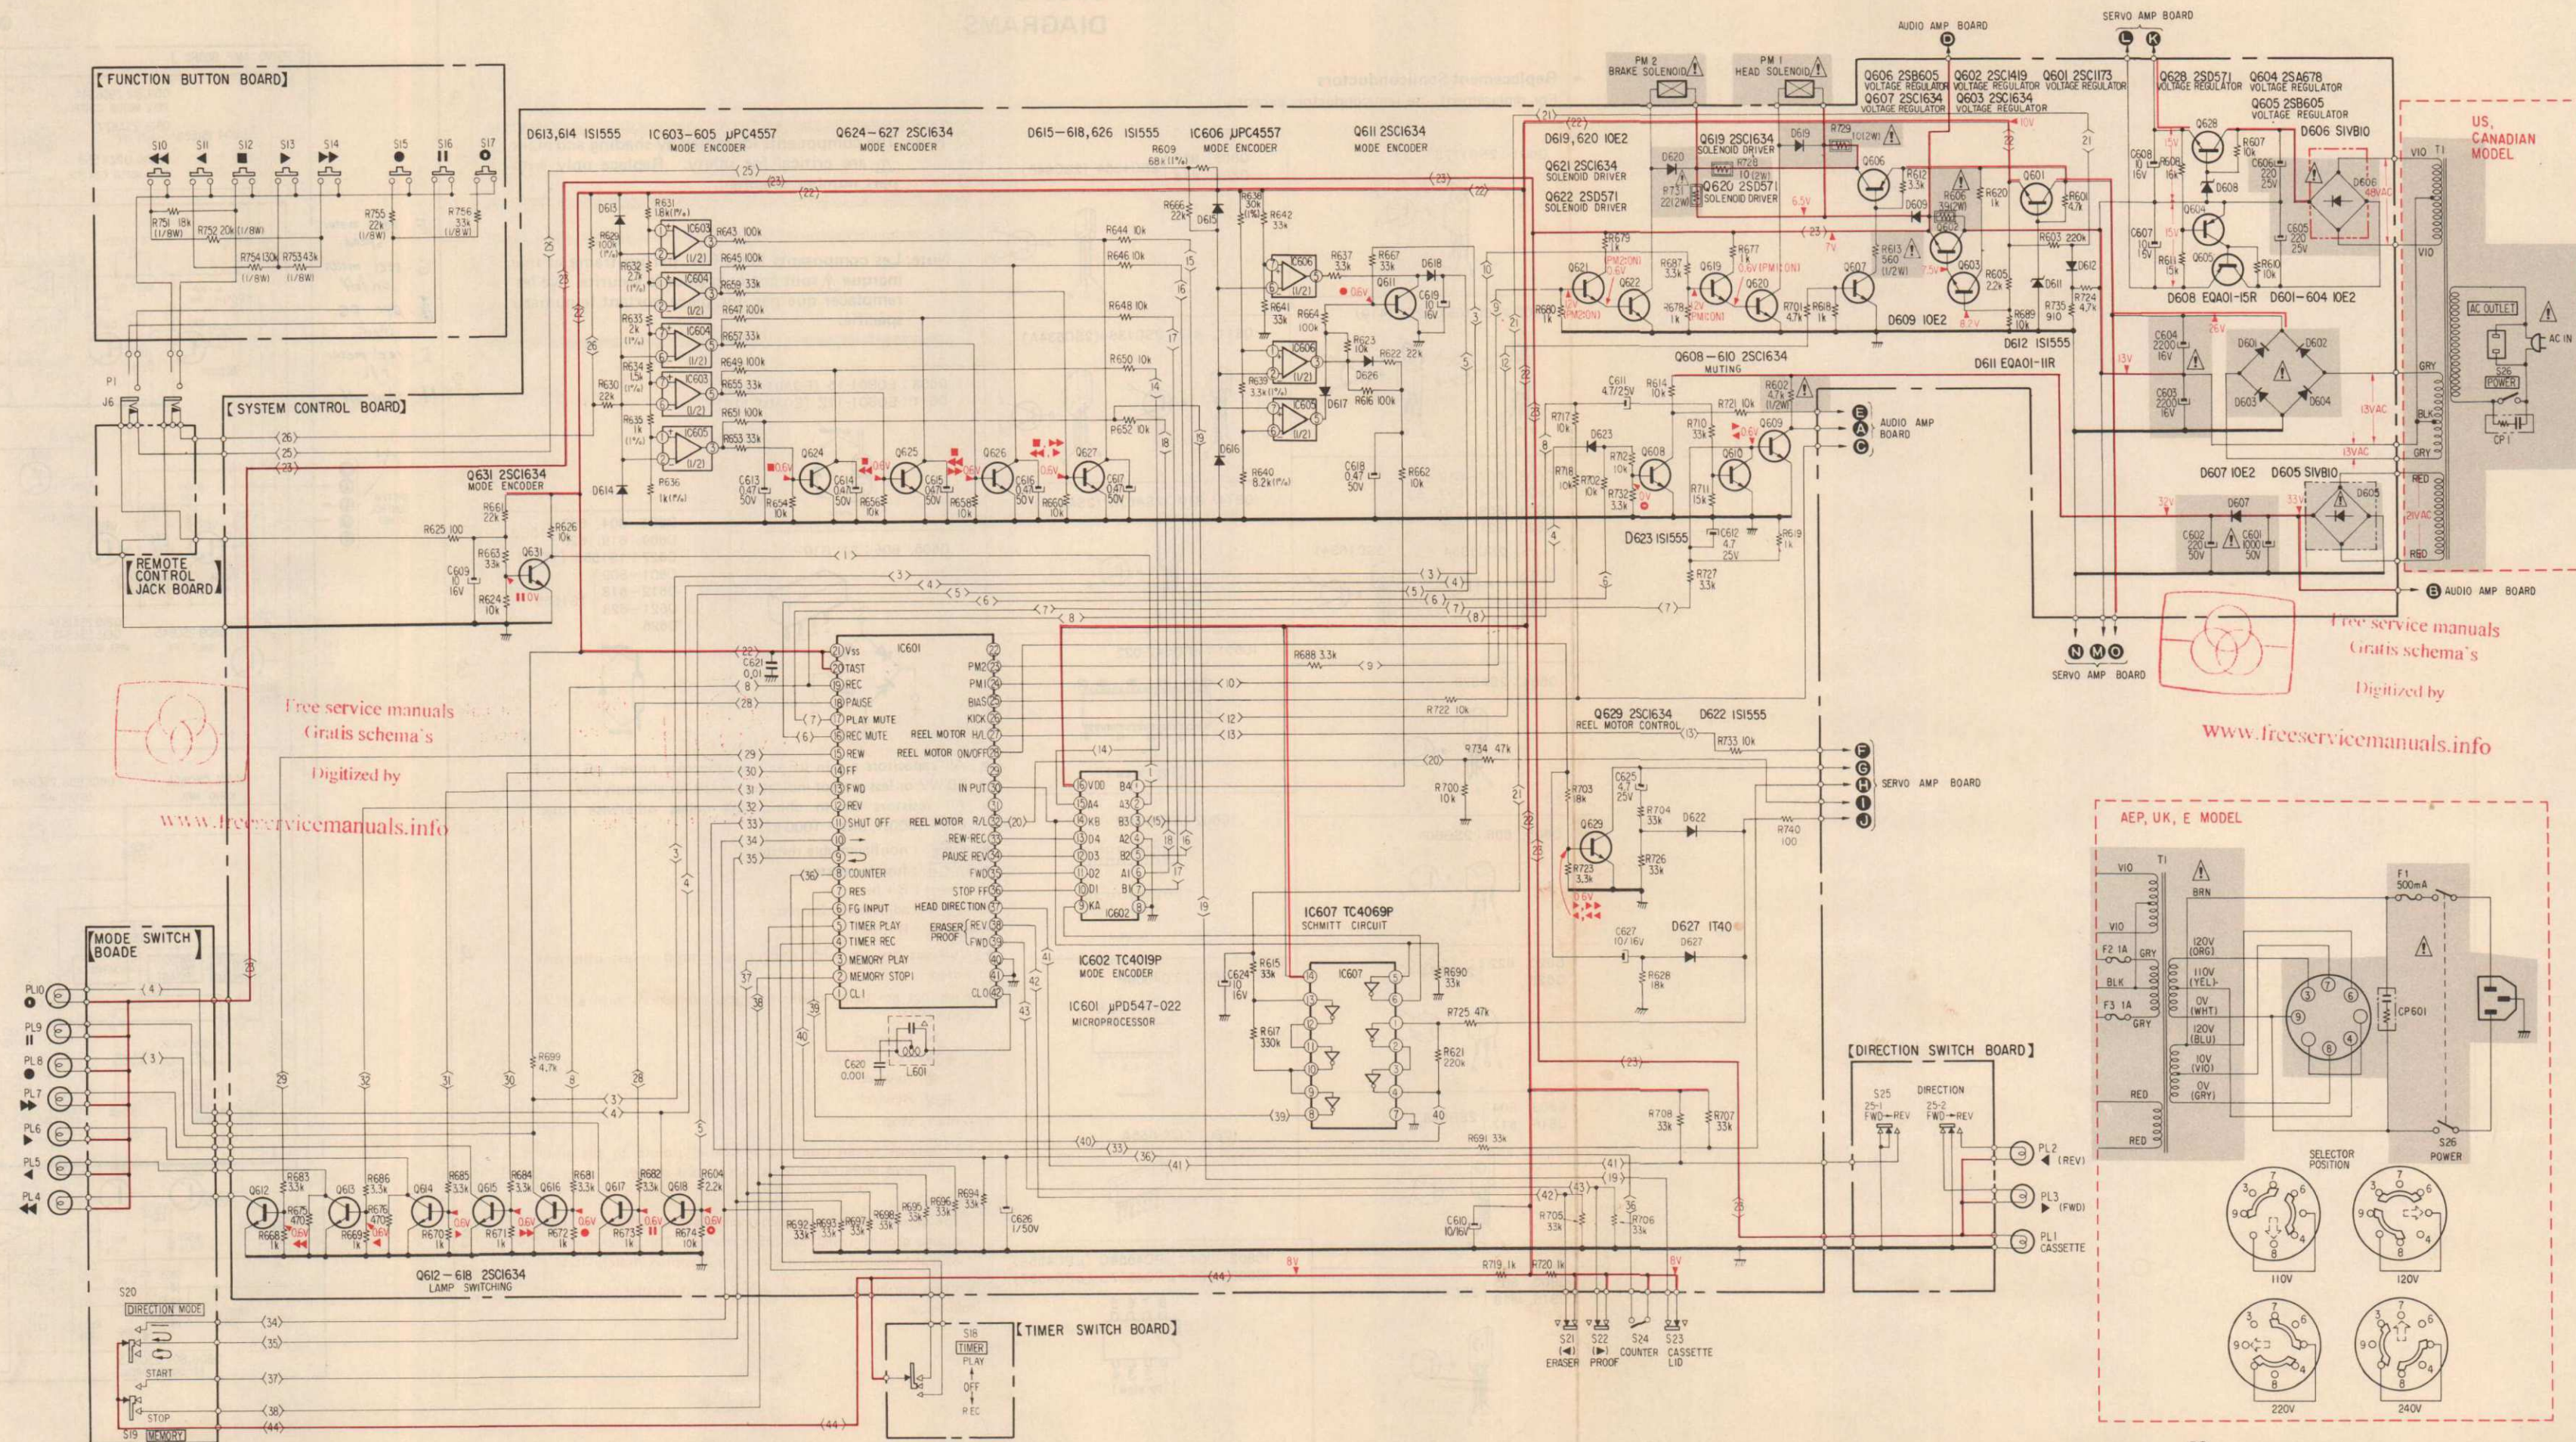


4-3. MOUNTING DIAGRAM —System Control Section—
—Conductor Side—

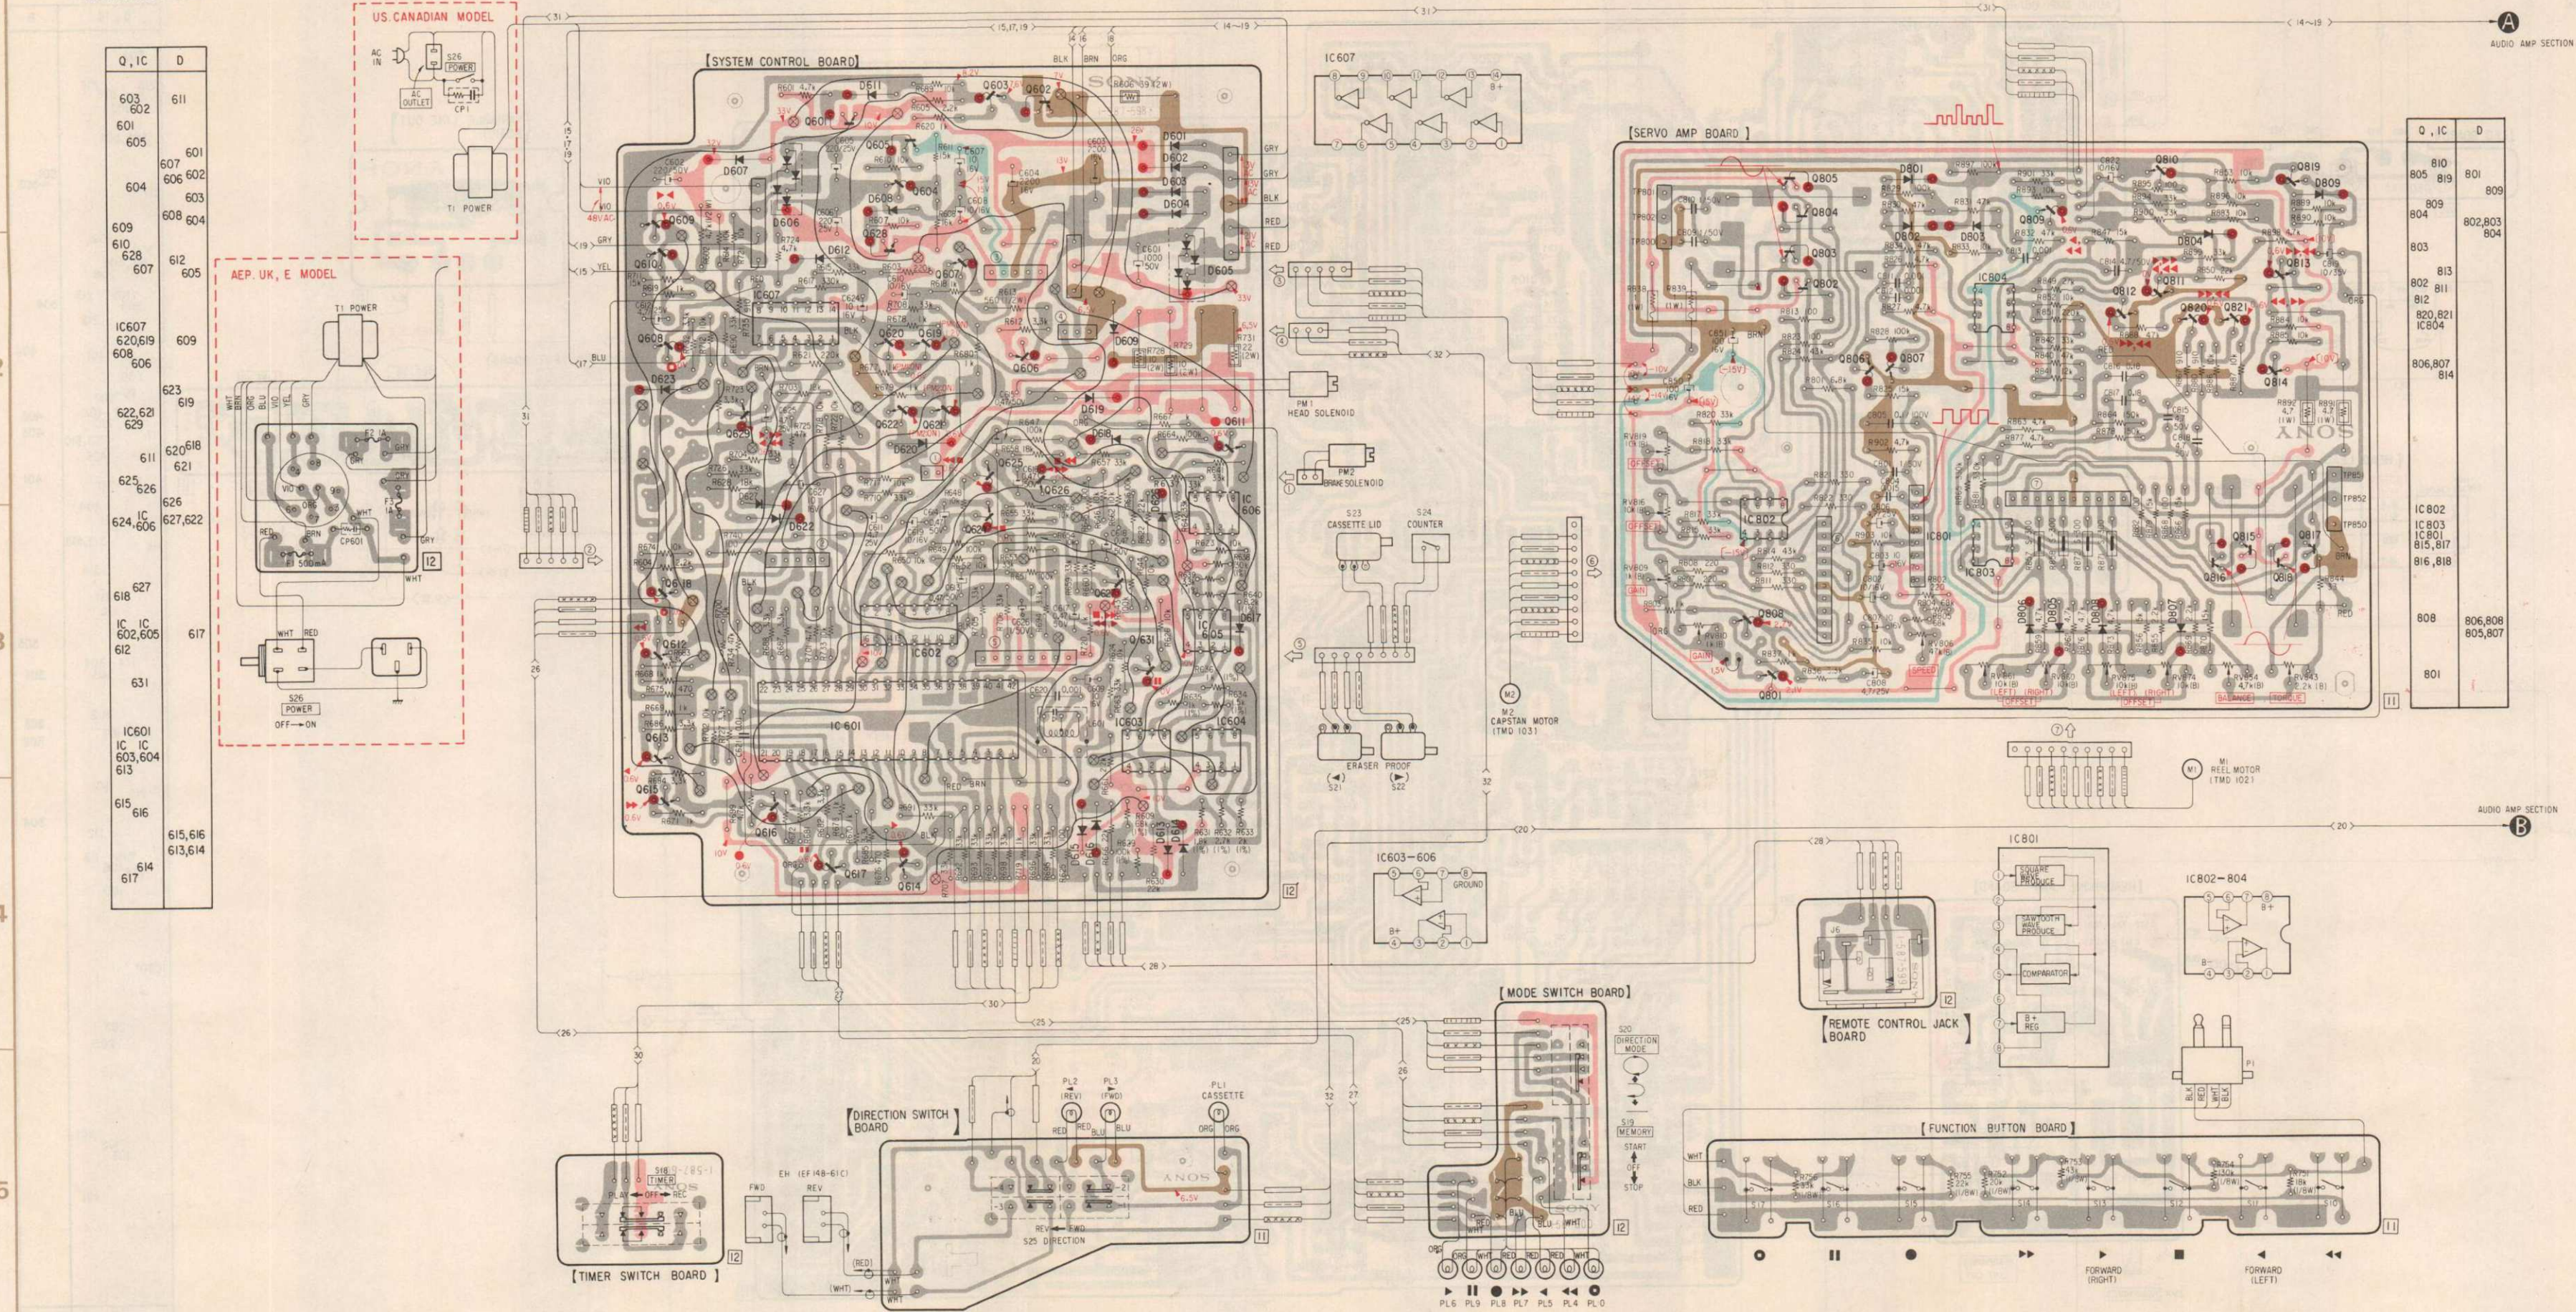

Replacement Semiconductors: See page 22.


- Color code of sleeving over the end of the jacket.



- ○ : parts extracted from the component side.
- ● : parts extracted from the conductor side.
- ⊗ : Through hole.
- ⊗⊗ : component-side pattern
- ● : B + (high) pattern
- ⊗ : B + (low) pattern
- ● : B - pattern

- Replacement Semiconductors: See Page 35.

- Color code of sleeving over the end of the jacket.




- ○ — : parts extracted from the component side.
- ● — : parts extracted from the conductor side.

- **Signal Path**

→ : L-CH

Pattern : B + (high) pattern

■ : B + (low) pattern

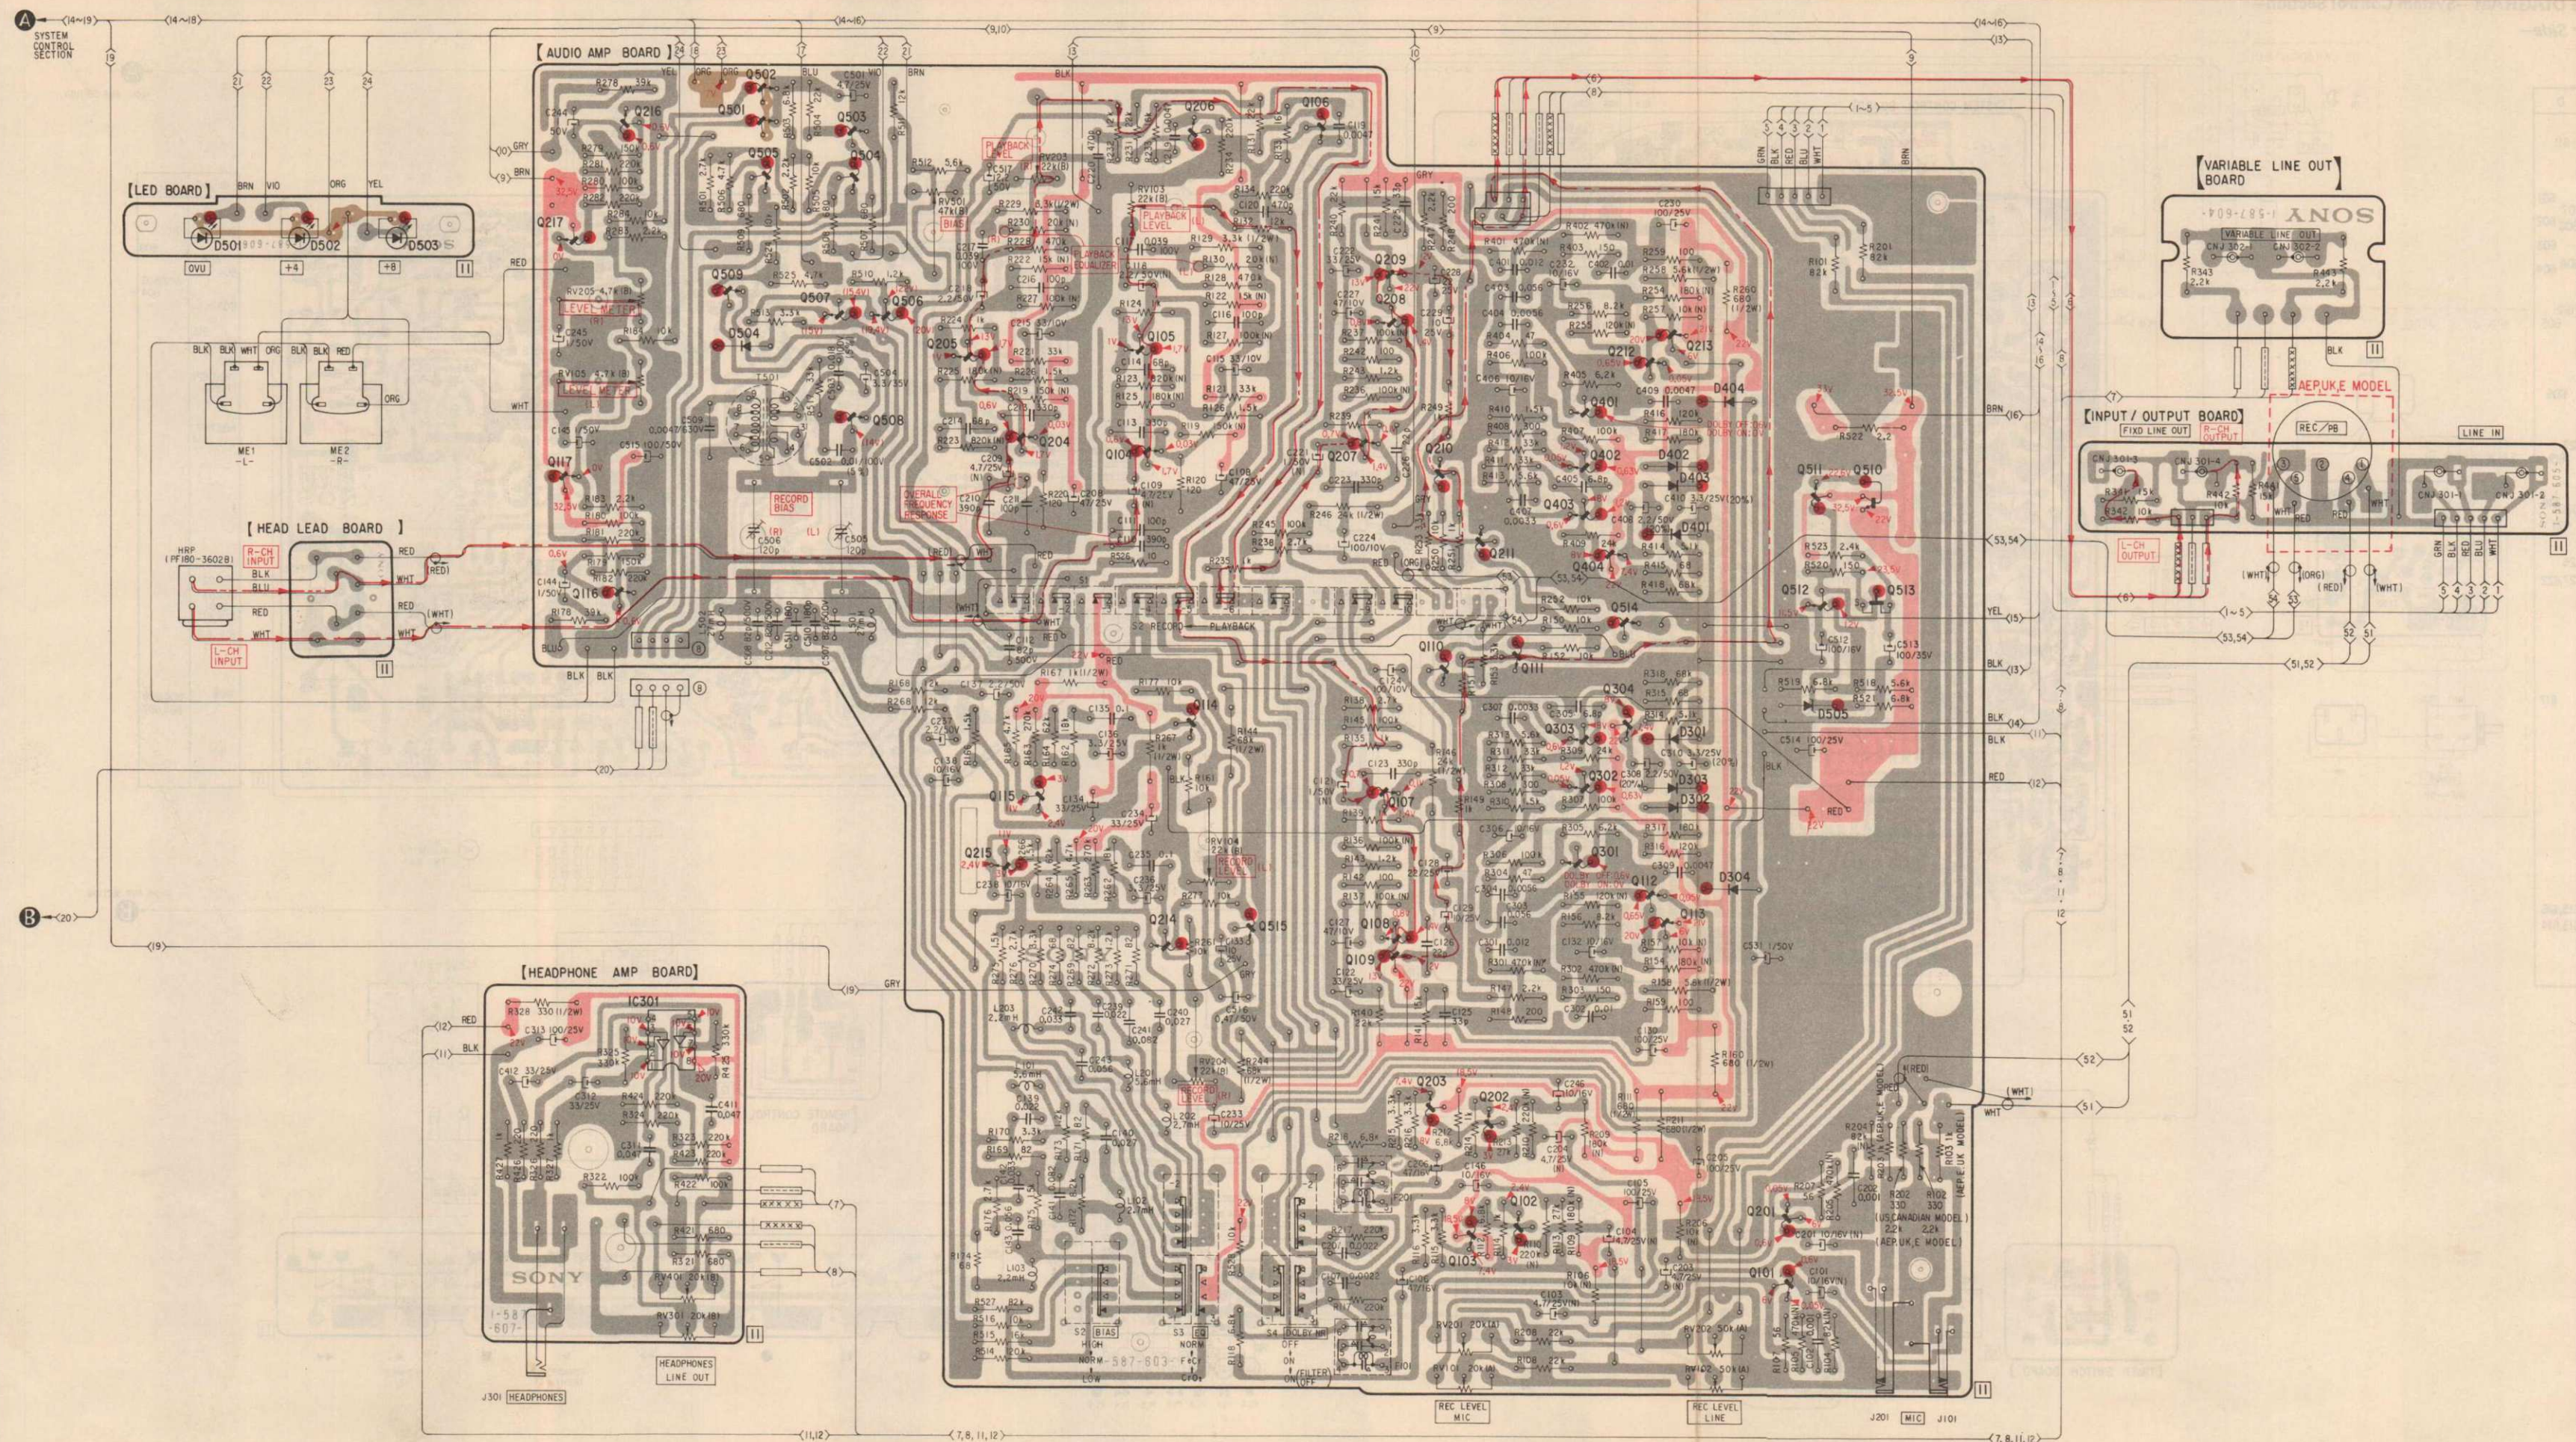

Q, IC	D
502	
216 501 206 ¹⁰⁶ 503	
505,504	
217	501 ~503
509 209 507,506 208	
105 213 205	504
212	
401	404
508 204 207 104 402 210	402 403
117 511,510 403	
211	401
404	
116 512,513	
514	
111 110	505
114 304 303	301
302	
115 107	303 302
215 301	
112	304
515 113 214 108 109	
IC301	
203 202	
201 102 103	
101	
Q, IC	D

4-5. SCHEMATIC DIAGRAM —Audio Amp Section—

Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- All capacitors are in μF unless otherwise noted. $\text{pF} = \mu\text{F} \times 10^{-6}$
- All resistors are in ohms, $\frac{1}{4}\text{W}$ unless otherwise noted. $\text{k}\Omega = 1000\Omega$, $\text{M}\Omega = 1000\text{k}\Omega$
- (N) : low-noise resistor.
-  : B + bus.
-  : panel designation.
-  : adjustment for repair.

- Voltagages are dc with respect to ground unless otherwise noted.
- Readings are taken under no signal conditions with a VOM (20 $\text{k}\Omega/\text{V}$).
- () : record
- no mark : stop
- Voltage variations may be noted due to normal production tolerances.

Switch




Ref. No.	Switch	Position
S1	RECORD/PLAYBACK	PLAYBACK
S2	BIAS	HIGH
S3	EQ	NORM
S4	DOLBY NR	OFF

Replacement Semiconductors

For replacement, use semiconductors except in ().


Q101-105, 107 Q201-205, 207 Q112, 212	2SC1345	Q510 : 2SC1173
Q106, 206, 116, 216 Q111, 211, 117, 217 Q114, 214, 501-507 Q509, 514 Q301-304 Q401-404	2SC1364 (2SC633A)	Q513 : 2SK30A
Q108, 109, 115 Q208, 209, 215 Q511, 512, 515	2SC1364 (2SC458)	IC301 : $\mu\text{PC4557C}$ (μPC4557)
Q113, 213 : 2SA678 Q110, 210 : 2SC1474	(2SA844) (2SD471)	D301, 302, 304 D401, 402, 404 D504 D303, 403 : 1T22AM (1T22A)
Q508 : 2SC1475 (2SC1318)		D501-503 : SLP137B
		D505 : EOB01-12Z (EOA01-12R)

5-2.

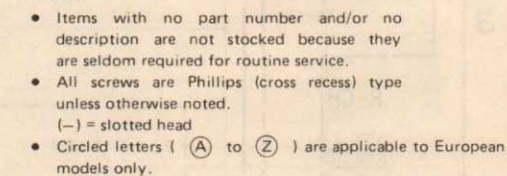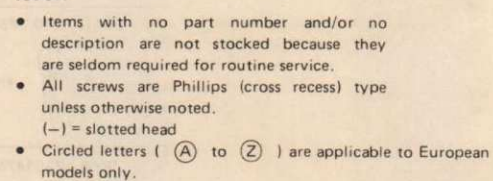

Note: Les composants identifiés par un trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

5-3.

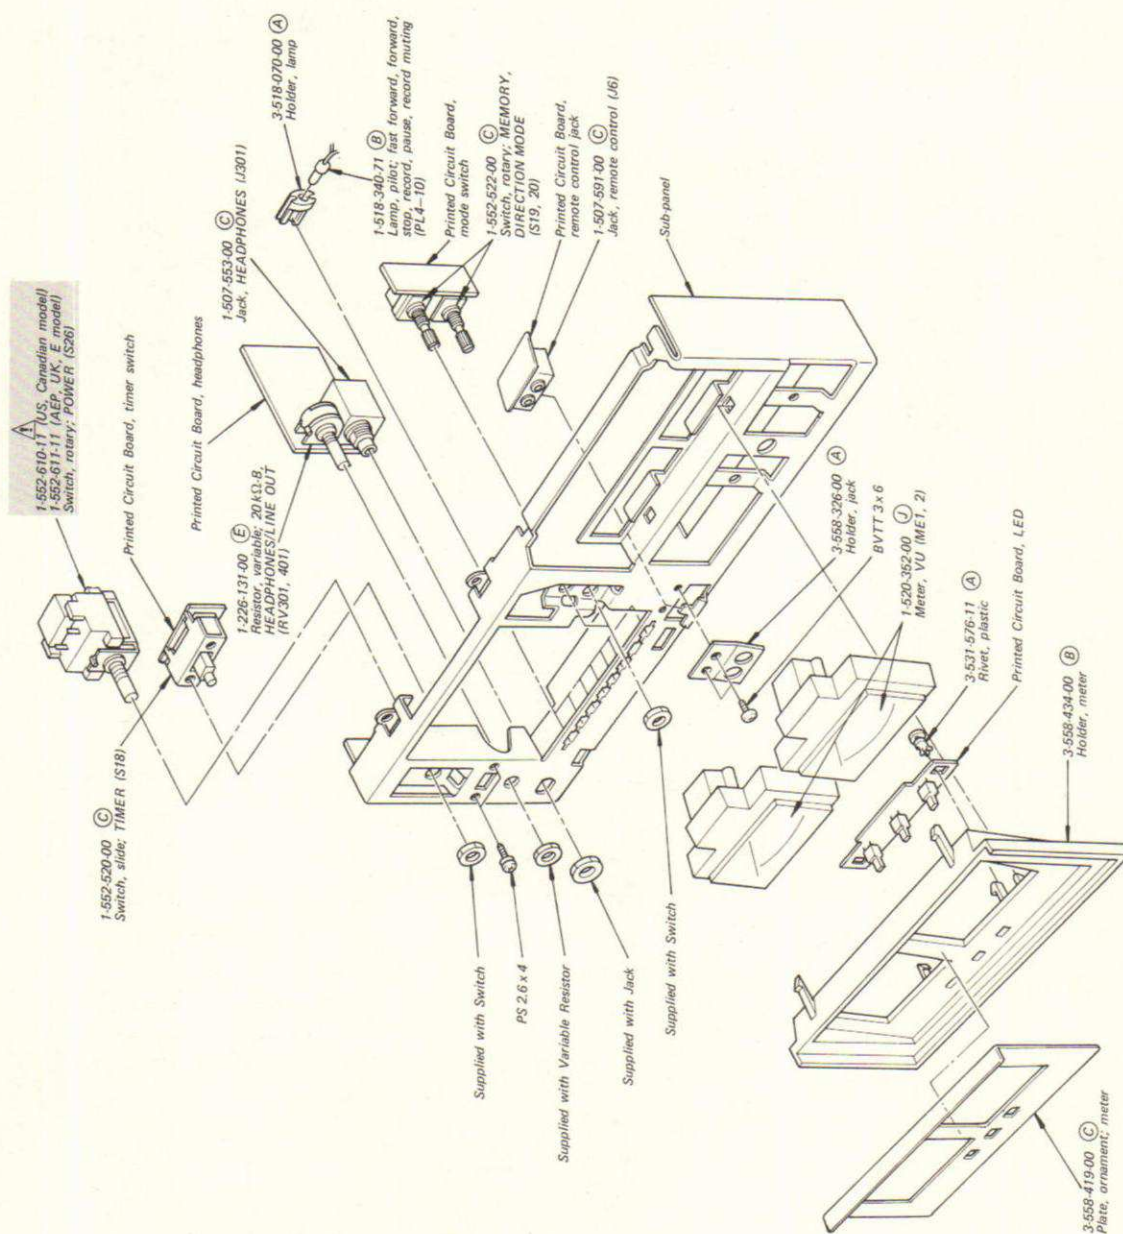
**Note:**

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head
- Circled letters (A) to (Z) are applicable to European models only.

Note: Les composants identifiés par un triangle et une marque **A** sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Note: The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- (—) = slotted head
- Circled letters (A) to (Z) are applicable to European models only.
- (□□T) shows the number of coils in spring.

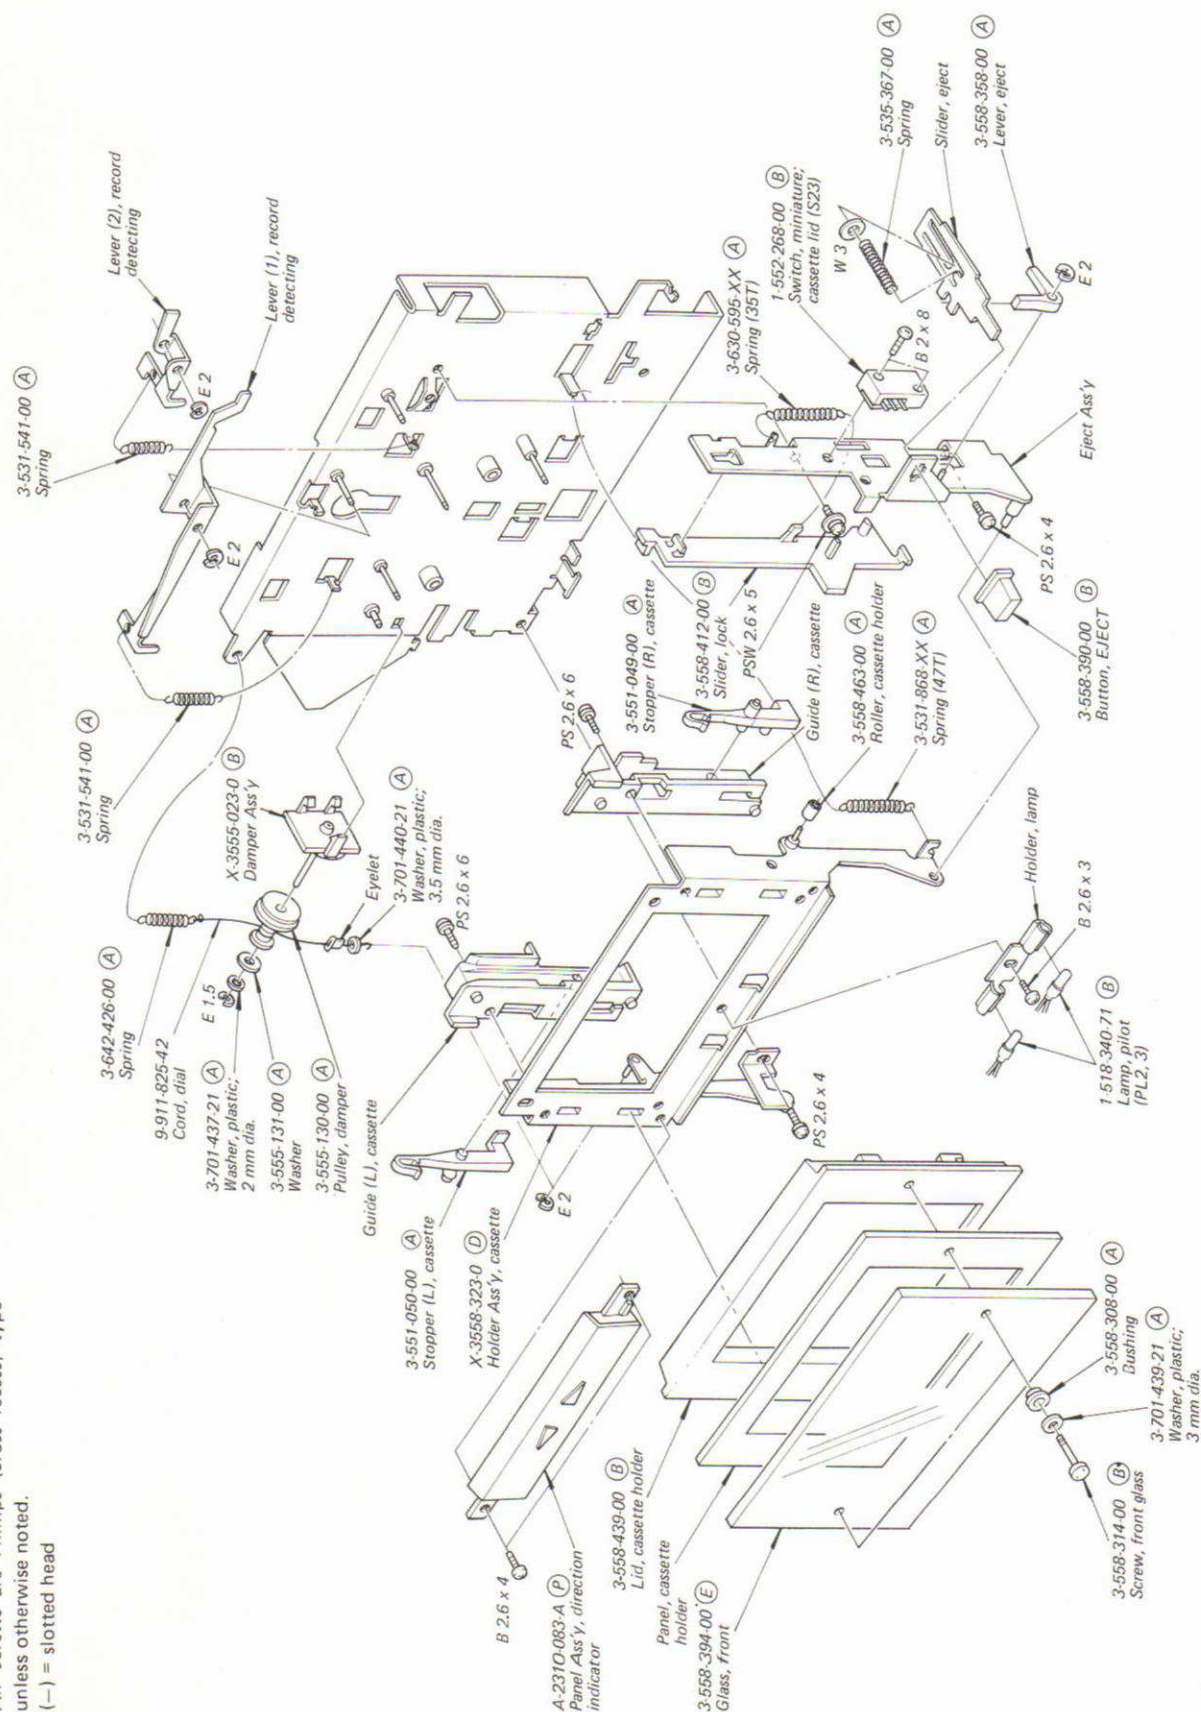


A

- 寸



5-6.

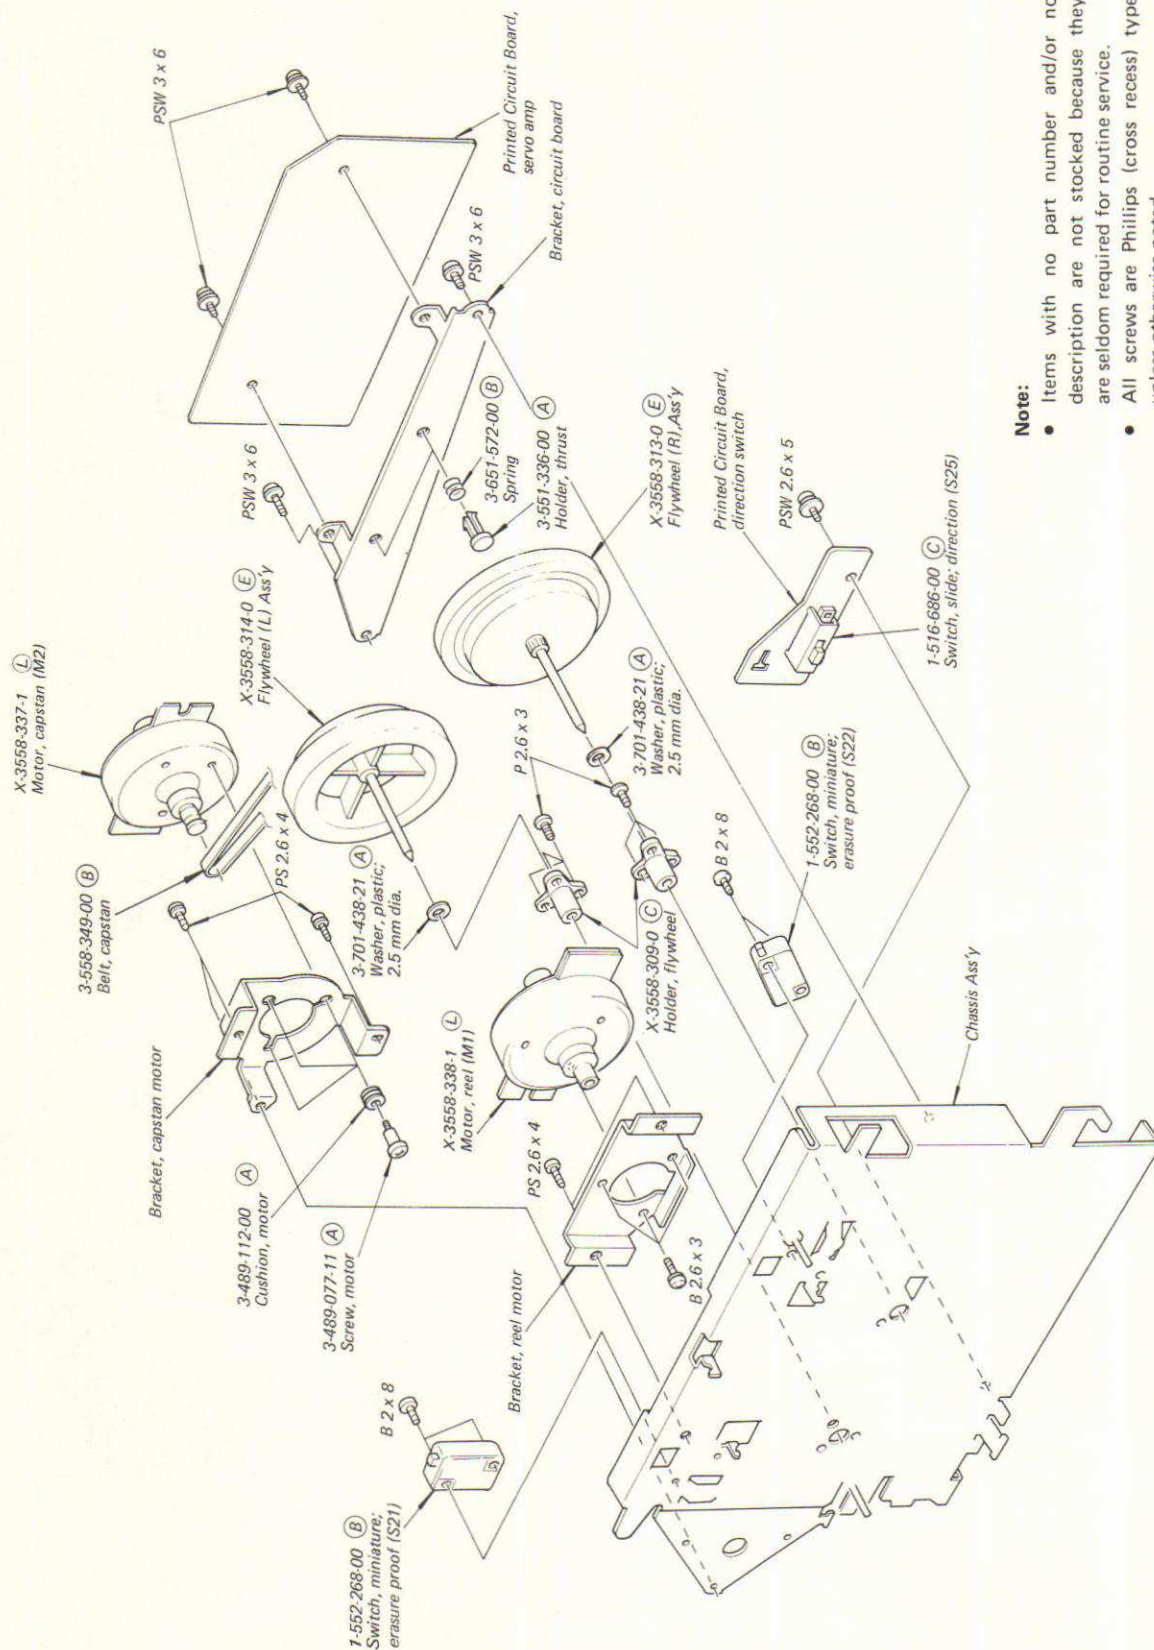

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head
- Circled letters (A) to (Z) are applicable to European models only.

A ————— B ————— C ————— D ————— E



- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
- Circled letters (**A** to **Z**) are applicable (—) = slotted head
- **□□T** shows the number of coils in spring.

Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.


A

B

C



D

5-8.

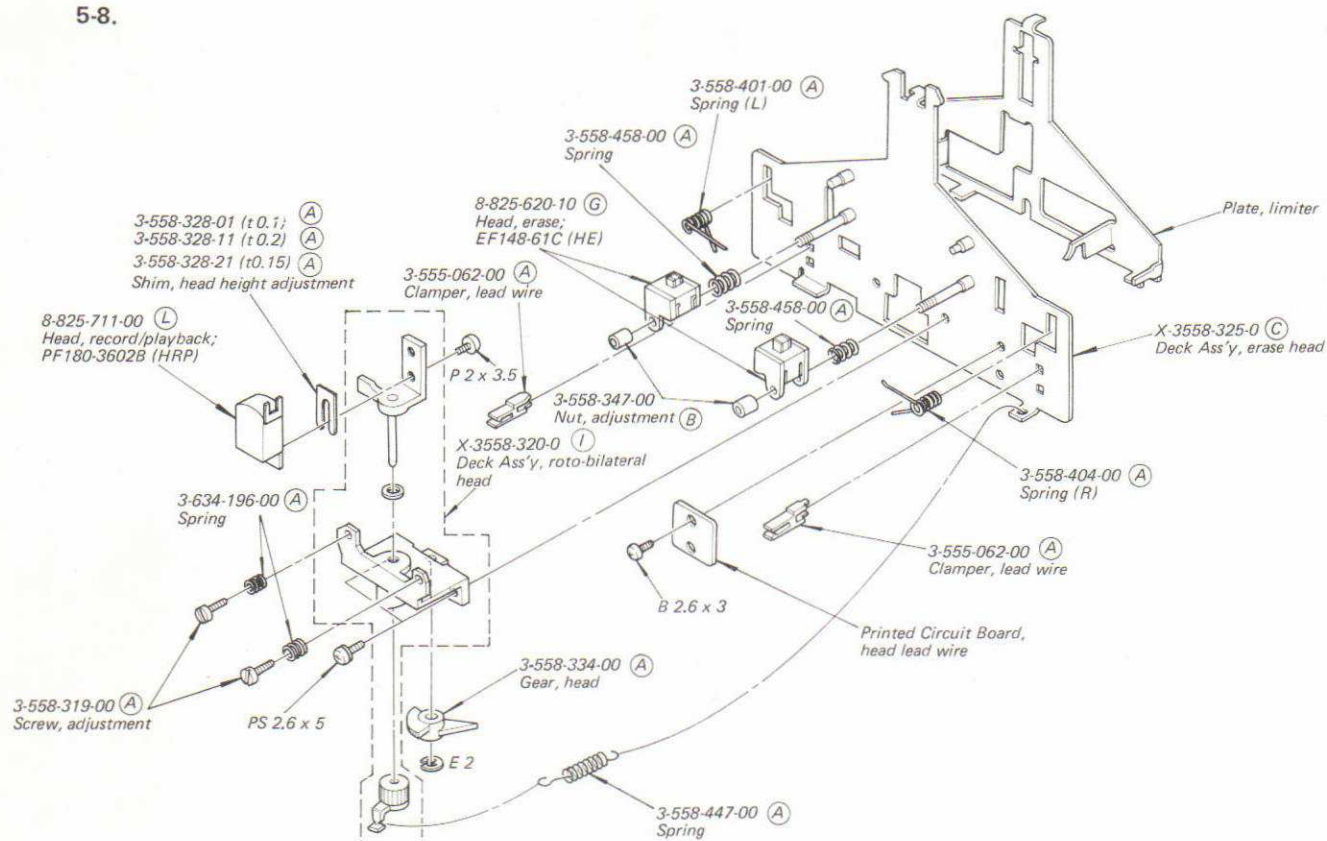**Note:**

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head
- Circled letters (A) to (Z) are applicable to European models only.

5-9.

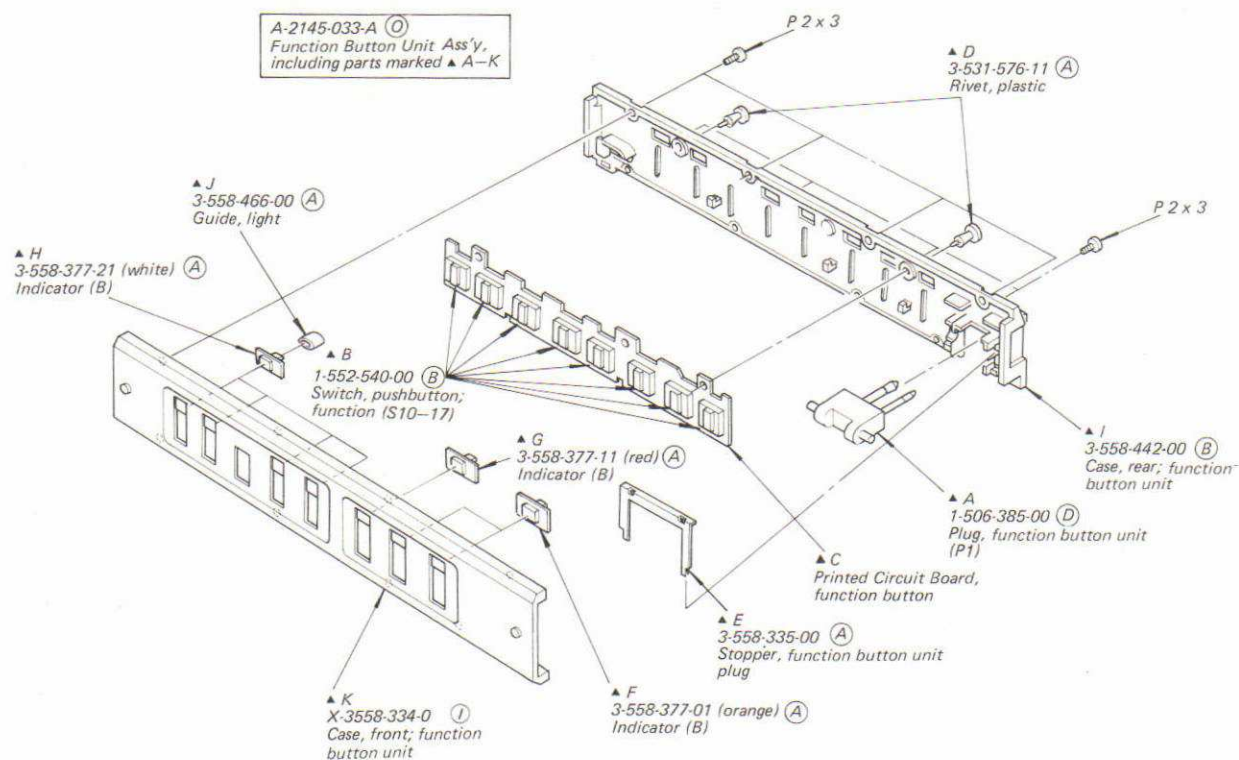Free service manuals
Gratis schema's

Digitized by

www.freeservicemanuals.info

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
(-) = slotted head
- Circled letters (A) to (Z) are applicable to European models only.

SECTION 6

ELECTRICAL PART LIST

• Circled letters (A) to (Z) are applicable to European models only.

Ref. No.	Part No.	Description
PRINTED CIRCUIT BOARD		
	1-588-144-00	(B) Voltage Selector (AEP, UK, E model)

SEMICONDUCTORS

Transistors

Q101-105)	8-729-334-58	(B) 2SC1345
Q201-205)		
⇒ Q106, 206	8-729-663-47	(B) 2SC1364
Q107, 207	8-729-334-58	(B) 2SC1345
⇒ Q108, 208)	8-729-663-47	(B) 2SC1364
Q109, 209)		
⇒ Q110, 210	8-760-335-10	(B) 2SC1474
⇒ Q111, 211	8-729-663-47	(B) 2SC1364
Q112, 212	8-729-334-58	(B) 2SC1345
⇒ Q113, 213	8-727-788-00	(B) 2SA678
⇒ Q114-117)	8-729-663-47	(B) 2SC1364
Q214-217)		
⇒ Q301-304)	8-729-663-47	(B) 2SC1364
Q401-404)		
⇒ Q501-507	8-729-663-47	(B) 2SC1364
⇒ Q508	8-760-413-10	(C) 2SC1475
⇒ Q509	8-729-663-47	(B) 2SC1364
Q510	8-729-217-33	(C) 2SC1173
⇒ Q511, 512	8-729-663-47	(B) 2SC1364
Q513	8-729-203-04	(B) 2SK30A
⇒ Q514, 515	8-729-663-47	(B) 2SC1364
Q601	8-729-217-33	(C) 2SC1173
⇒ Q602	8-729-316-12	(D) 2SC1061
⇒ Q603	8-729-663-47	(B) 2SC1364
Q604	8-727-788-00	(B) 2SA678
Q605, 606	8-729-160-51	(B) 2SB605
⇒ Q607-619	8-729-663-47	(B) 2SC1364
Q620	8-729-157-11	(B) 2SD571
⇒ Q621	8-729-663-47	(B) 2SC1364
Q622	8-729-157-11	(B) 2SD571
⇒ Q624-627	8-729-663-47	(B) 2SC1364
Q628	8-729-157-11	(B) 2SD571
⇒ Q629, 631	8-729-663-47	(B) 2SC1364

• ⇒ : Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description
⇒ Q801	8-729-663-47	(B) 2SC1364
Q802	8-729-141-43	(B) 2SD414
Q803, 804	8-729-154-83	(B) 2SB548
Q805	8-729-141-43	(B) 2SD414
⇒ Q806-813	8-729-663-47	(B) 2SC1364
⇒ Q814	8-727-788-00	(B) 2SA678
Q815	8-729-141-43	(B) 2SD414
Q816, 817	8-729-154-83	(B) 2SB548
Q818	8-729-141-43	(B) 2SD414
⇒ Q819	8-727-788-00	(B) 2SA678
⇒ Q820, 821	8-729-663-47	(B) 2SC1364

ICs

⇒ IC301	8-759-145-57	(C) μ PC4557C
IC601	8-759-147-22	(L) μ PD547-022
IC602	8-759-240-19	(C) TC4019P
⇒ IC603-606	8-759-145-57	(C) μ PC4557C
IC607	8-759-240-69	(C) TC4069P
IC801	8-759-600-65	(F) CX065A
⇒ IC802-804	8-759-145-58	(D) μ PC4558C

Diodes

D301, 401)	8-719-815-55	(B) 1S1555
D302, 402)		
⇒ D303, 403	8-719-422-21	(B) 1T22AM
D304, 404	8-719-815-55	(B) 1S1555
D501-503	8-719-901-37	(B) SLP137B
D504	8-719-815-55	(B) 1S1555
⇒ D505	8-719-930-12	(B) EQB01-12Z
D601-604 	8-719-200-02	(B) 10E2
D605, 606 	8-719-511-10	(C) S1VB10
D607 	8-719-200-02	(B) 10E2
⇒ D608	8-719-931-15	(B) EQB01-15
D609	8-719-200-02	(B) 10E2
⇒ D611	8-719-930-11	(B) EQB01-11Z
D612-618	8-719-815-55	(B) 1S1555
D619, 620 	8-719-200-02	(B) 10E2
D622, 623	8-719-815-55	(B) 1S1555
D626	8-719-815-55	(B) 1S1555
⇒ D627	8-819-815-55	(B) 1S1555
D801-809	8-719-815-55	(B) 1S1555

Note: Les composants identifiés par un trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

• Circled letters (A to Z) are applicable to European models only.

Ref. No. Part No. Description

COILS

L101, 201	1-407-203-XX	(A) 5.6 mH, microinductor
L102, 202	1-407-199-XX	(B) 2.7 mH, microinductor
L103, 203	1-407-198-XX	(A) 2.2 mH, microinductor
L501, 502	1-407-211-XX	(B) 27 μ H, microinductor
L601	1-405-800-00	(B) Osc

TRANSFORMERS

T1	(A) 1-446-216-00	Power (US, Canadian model)
	(A) 1-446-217-00	(N) Power (AEP, UK, E model)
T501	1-433-132-11	(B) Bias Osc

CAPACITORS

All capacitors are in μ F and ceramic unless otherwise noted. 50WV or less are not indicated except for electrolytics. pF = μ F, elect = electrolytic

C101, 201	1-121-651-11	(A) 10	16V	elect
C102, 202	1-161-323-11	(A) 0.001		
C103, 203 C104, 204	1-121-915-11	(B) 4.7	25V	elect
C105, 205	1-121-416-11	(B) 100	25V	elect
C106, 206	1-121-409-11	(A) 47	16V	elect
C107, 207	1-108-230-12	(A) 0.0022		mylar
C108, 208	1-121-410-11	(B) 47	25V	elect
C109, 209	1-121-915-11	(B) 4.7	25V	elect
C110, 210	1-161-318-11	(A) 390p		
C111, 211	1-161-271-11	(A) 100p		
C112, 212	1-107-037-11	(A) 82p	500V	silvered mica
C113, 213	1-161-317-11	(A) 330p		
C114, 214	1-161-269-11	(A) 68p		
C115, 215	1-121-402-11	(A) 33	10V	elect
C116, 216	1-161-271-11	(A) 100p		
C117, 217	1-130-190-11	(B) 0.039	100V	polyethylene
C118, 218	1-121-450-11	(A) 2.2	50V	elect
C119, 219	1-108-234-12	(A) 0.0047		mylar
C120, 220	1-161-319-11	(A) 470p		
C121, 221	1-121-391-11	(A) 1	50V	elect

Ref. No. Part No. Description

C122, 222	1-121-404-11	(A) 33	25V	elect
C123, 223	1-161-317-11	(A) 330p		
C124, 224	1-121-414-11	(A) 100	10V	elect
C125, 225	1-161-265-11	(A) 33p		
C126, 226	1-161-263-11	(A) 22p		
C127, 227	1-121-352-11	(A) 47	10V	elect
C128, 228	1-121-480-11	(A) 22	25V	elect
C129, 229	1-121-398-11	(A) 10	25V	elect
C130, 230	1-121-416-11	(B) 100	25V	elect
C131	1-121-391-11	(A) 1	50V	elect
C132, 232	1-121-651-11	(A) 10	16V	elect
C133, 233	1-121-398-11	(A) 10	25V	elect
C134, 234	1-121-404-11	(A) 33	25V	elect
C135, 235	1-108-251-12	(B) 0.1		mylar
C136, 236	1-121-392-11	(A) 3.3	25V	elect
C137, 237	1-121-450-11	(A) 2.2	50V	elect
C138, 238	1-121-651-11	(A) 10	16V	elect
C139, 239	1-108-242-12	(A) 0.022		mylar
C140, 240	1-108-589-12	(A) 0.027		mylar
C141, 241	1-108-362-12	(B) 0.082		mylar
C142, 242	1-108-591-12	(A) 0.033		mylar
C143, 243	1-108-361-12	(A) 0.056		mylar
C144, 244 C145, 245	1-121-391-11	(A) 1	50V	elect
C146, 246	1-121-651-00	(A) 10	16V	elect
C301, 401	1-108-581-12	(A) 0.012		mylar
C302, 402	1-108-239-12	(A) 0.01		mylar
C303, 403	1-108-361-12	(A) 0.056		mylar
C304, 404	1-108-355-12	(A) 0.0056		mylar
C305, 405	1-161-257-11	(A) 6.8p		
C306, 406	1-121-651-11	(A) 10	16V	elect
C307, 407	1-108-567-12	(A) 0.0033		mylar
C308, 408	1-121-450-11	(A) 2.2	50V	elect
C309, 409	1-108-234-12	(A) 0.0047		mylar
C310, 410	1-121-392-11	(A) 3.3	25V	elect

Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

• Circled letters (A to Z) are applicable to European models only.

Ref. No.	Part No.	Description
C311, 411	1-161-021-11 (A) 0.047	(semiconductor)
C312, 412	1-121-404-11 (A) 33	25V elect
C313	1-121-416-11 (B) 100	25V elect
C501	1-121-395-11 (A) 4.7	25V elect
C502	1-129-701-11 (A) 0.01	100V polyethylene
C503	1-130-189-11 (B) 0.018	100V polyethylene
C504	1-131-350-11 (B) 3.3	35V tantalum
C505, 506	1-141-010-XX (B) Trimmer, 120p	
C507, 508	1-107-037-11 (A) 82p	500V mica
C509	1-129-710-11 (B) 0.0047	630V polyethylene
C510, 511	1-107-091-11 (A) 180p	mica
C512	1-121-415-11 (A) 100	16V elect
C513	1-121-357-11 (B) 100	35V elect
C514	1-121-416-11 (B) 100	25V elect
C515	1-121-417-11 (B) 100	50V elect
C516	1-121-726-11 (A) 0.47	50V elect
C517	1-121-450-11 (A) 2.2	50V elect
C601	 1-123-364-11 (C) 1000	50V elect
C602	 1-123-361-11 (B) 220	50V elect
C603, 604	 1-123-325-11 (B) 2200	16V elect
C605, 606	 1-123-334-11 (B) 220	25V elect
C607-610	1-121-651-11 (A) 10	16V elect
C611, 612	1-121-395-11 (A) 4.7	25V elect
C613-618	1-121-726-11 (A) 0.47	50V elect
C619	1-121-651-11 (A) 10	16V elect
C620	1-161-323-11 (A) 0.001	
C621	1-161-379-11 (A) 0.01	
C622-624	1-121-651-11 (A) 10	16V elect
C625	1-121-395-11 (A) 4.7	25V elect
C801	1-123-228-11 (B) 1	50V elect (nonpolarized)
C802, 803	1-121-651-11 (A) 10	16V elect
C804	1-108-240-12 (A) 0.015	mylar
C805	1-130-071-11 (B) 0.1	100V polyethylene
C806	1-121-395-11 (A) 4.7	25V elect
C807	1-121-450-11 (A) 2.2	50V elect
C808	1-121-395-11 (A) 4.7	25V elect
C809, 810	1-123-228-11 (B) 1	50V elect (nonpolarized)

Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description
C811-813	1-161-323-11 (A) 0.001	
C814, 815	1-123-232-11 (B) 4.7	50V elect (nonpolarized)
C816, 817	1-108-364-12 (A) 0.18	mylar
C818	1-123-232-11 (B) 4.7	50V elect (nonpolarized)
C819	1-121-738-11 (A) 10	50V elect
C822	1-121-651-11 (A) 10	16V elect
C850, 851	1-121-415-11 (A) 100	16V elect

RESISTORS

All resistors are in ohms. Common 1/4W carbon resistors are omitted. Check schematic diagram for values.

R111, 211	 1-244-869-11 (A) 680	1/2W carbon
R129, 229	1-244-885-11 (A) 3.3k	1/2W carbon
R144, 244	1-244-917-11 (A) 68k	1/2W carbon
R146, 246	1-244-906-11 (A) 24k	1/2W carbon
R158, 258	1-244-891-11 (A) 5.6k	1/2W carbon
R160, 260	 1-244-869-11 (A) 680	1/2W carbon
R167, 267	 1-244-873-11 (A) 1k	1/2W carbon
R328	 1-244-861-11 (A) 330	1/2W carbon
R522	 1-246-409-11 (A) 2.2	1/4W carbon
R602	 1-244-889-11 (A) 4.7k	1/2W carbon
R606	 1-206-477-11 (A) 39	2W metal oxide (nonflammable)
R609	1-214-176-11 (A) 68k	1/4W metal oxide (1%)
R613	 1-244-867-11 (A) 560	1/2W carbon
R629	1-214-180-11 (A) 100k	1/4W metal oxide (1%)
R631	1-214-138-11 (A) 1.8k	1/4W metal oxide (1%)
R632	1-214-142-11 (A) 2.7k	1/4W metal oxide (1%)
R633	1-214-139-11 (A) 2k	1/4W metal oxide (1%)
R634	1-214-136-11 (A) 1.5k	1/4W metal oxide (1%)
R635, 636	1-214-132-11 (A) 1k	1/4W metal oxide (1%)
R638	1-214-167-11 (A) 30k	1/4W metal oxide (1%)
R639	1-214-144-11 (A) 3.3k	1/4W metal oxide (1%)
R640	1-214-154-11 (A) 8.2k	1/4W metal oxide (1%)
R728, 729	 1-206-463-11 (A) 10	2W metal oxide (nonflammable)

Note: Les composants identifiés par un trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- Circled letters (A to Z) are applicable to European models only.

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>		
R731	 1-206-471-11	(A) 22	2W	metal oxide (nonflammable)
R751	1-210-113-11	(A) 18k	$\frac{1}{8}$ W	carbon
R752	1-246-859-11	(A) 20k	$\frac{1}{8}$ W	carbon
R753	1-246-863-11	(A) 43k	$\frac{1}{8}$ W	carbon
R754	1-246-869-11	(A) 130k	$\frac{1}{8}$ W	carbon
R755	1-210-114-11	(A) 22k	$\frac{1}{8}$ W	carbon
R756	1-210-381-11	(B) 33k	$\frac{1}{8}$ W	carbon
R804,805	1-214-176-11	(A) 68k	$\frac{1}{4}$ W	metal oxide
R838,839	 1-213-036-11	(A) 1	1W	fusible
R891,892	 1-212-393-11	(A) 4.7	1W	metal oxide (nonflammable)

RV101,201	1-226-294-00	(E) 20k-A, variable; MIC
RV102,202	1-226-295-00	(E) 50k-A, variable; LINE
RV103,203	1-224-646-XX	(B) 22k-B, adjustable; playback level, record level
RV104,204		
RV105,205	1-224-644-XX	(B) 4.7k-B, adjustable; level meter

RV301,401	1-226-131-00	(E) 20k-B, variable; HEADPHONES LINE OUT
-----------	--------------	---

RV501	1-224-647-XX	(B) 47k-B, adjustable; bias
RV806	1-224-661-00	(B) 47k-B, adjustable; speed
RV809,810	1-224-642-XX	(B) 1k-B, adjustable; gain
RV816,819	1-224-645-XX	(B) 10k-B, adjustable; offset
RV843	1-224-642-XX	(B) 1k-B, adjustable; torque
RV854	1-224-633-00	(B) 4.7k-B, adjustable; balance

RV860,861	1-224-645-XX	(B) 10k-B, adjustable; offset
RV874,875		

SWITCHES

S1	1-552-521-00	(C) slide, record/playback
S2	1-552-523-00	(C) Lever-slide, BIAS
S3,4	1-552-524-00	(C) Lever-slide, EQ, DOLBY NR
S10-17	1-552-540-00	(B) pushbutton, function

S18	1-552-520-00	(C) Slide, TIMER
S19,20	1-552-522-00	(C) Rotary, MEMORY, DIRECTION MODE
S21-23	1-552-268-00	(B) Miniature, eraser proof, cassette lid
S24	1-548-526-00	(G) Tape Counter, w/switch
S25	1-516-686-00	(C) Slide, direction
S26	 1-552-610-00	Rotary; POWER (US, Canadian model)
S26	 1-552-611-00	(D) Rotary, POWER (AEP, UK, E model)

MISCELLANEOUS

CNJ301	1-507-501-21	(D) Jack, phono; 4p, LINE IN, LINE OUT-FIXED (AEP, UK, E model)
	1-507-531-21	Jack, phono; 4p, LINE IN, LINE OUT-FIXED (US, Canadian model)
CNJ302	1-507-526-21	(B) Jack, phono; 2p, LINE OUT- VARIABLE
CP1	 1-231-326-00	Encapsulated Component (US model)
	1-231-341-00	Encapsulated Component (Canadian model)
CP601	 1-231-057-00	(B) Encapsulated Component. (AEP, UK, E model)
F1	 1-532-295-00	(B) Fuse, 0.5A (AEP, UK, E model)
F2,3	 1-532-078-00	(B) Fuse, 1A (AEP, UK, E model)
F101,201	1-231-388-00	(C) Low-pass Filter
HE	8-825-620-10	(G) Head, erase; EF148-61C
HRP	8-825-711-00	(L) Head, record/playback; PF180-3602B
J6	1-507-591-00	(C) Jack, remote control
J101,201	1-507-525-00	(D) Jack, MIC
J301	1-507-553-00	(C) Jack, HEADPHONES
M1	X-3558-338-1	(L) Motor, reel; TMD-102
M2	X-3558-337-1	(L) Motor, capstan; TMD-103
ME1, 2	1-520-352-00	(J) Meter, level
P1	1-506-385-00	(D) Plug, remote control
PL1-10	1-518-340-71	(B) Lamp, pilot
PM1, 2	 1-454-195-00	(E) Solenoid
R857, 858	1-800-071-XX	(B) Thermistor S-300
R871, 872		

Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un tramé et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- Circled letters (**A**) to (**Z**) are applicable to European models only.

<u>Part No.</u>	<u>Description</u>
1-452-155-00	(B) Magnet
A 1-509-546-00	(C) Connector, AC INPUT (AEP, UK, E model)
A 1-526-528-00	Socket, AC OUTLET (US, Canadian model)
A 1-533-131-00	(A) Holder, fuse (AEP, UK, E model)
A 1-534-986-XX	Cord, power (US, Canadian model)
A 1-552-026-00	(E) Voltage Selector (AEP, UK, E model)

ACCESSORIES AND PACKING MATERIALS

<u>Part No.</u>	<u>Description</u>
X-3701-105-0	(A) Tips Ass'y, head cleaning
1-534-049-31	(E) Cord, connection; RK-74H
A 1-534-754-00	Cord, power; parallel-blade plug (E model)
A 1-534-819-00	(G) Cord, power (UK model)
A 1-551-216-00	Cord, power; euro plug (E model)
1-551-576-00	(I) Cord, remote control
3-429-126-00	(B) Bag, plastic; set
3-558-465-00	(B) Cushion (AEP, UK E model)
3-558-474-00	(A) Spacer
3-558-475-00	Carton (US, Canadian model)
3-558-476-00	(D) Carton (AEP, UK, E model)
3-558-478-00	Cushion (US, Canadian model)
3-701-630-00	(A) Bag, plastic
3-770-549-11	(G) Manual, instruction (AEP, UK, E model)
3-770-549-21	Manual, instruction (US model)
3-770-549-21)	Manual, instruction (Canadian model)
3-794-316-31)	
3-794-233-21	(A) Leaflet

Note: The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque **A** sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Sony Corporation


© 1978

9-954-662-11

78J0288-1
Printed in Japan

TC-K96R

STEREO CASSETTE DECK



Free service manuals
Gratis schema's

Digitized by

www.freeservicemanuals.info

*AEP Model
E Model
Canadian Model
UK Model
US Model*

SUPPLEMENT

File this supplement with the service manual.

No. 1
January, 1979

CIRCUIT DESCRIPTION

The system controller printed circuit board incorporates a micro computer.

The micro computer issued the drive signals for the solenoid, the reel motor, the capstan motor, etc., upon receiving the appropriate input signals from the operation switches, and thus carries out the switching required for each mode.

A simple explanation of the micro computer operation follows:

1. Micro Computer

The micro computer, literally, means a microscopic electronic computer. However, a computer, being more than a calculator, has functions similar to those of the human brain.

The human brain has three major functions.

- 1) Storage a capacity to store (memorize) previously received information.
- 2) Decision the ability to compare information obtained from the sense functions (eye, hand, leg, etc.) with the memorized information and to put out the most suitable instruction.
- 3) Instruction the ability to transmit the decisions to the body (hand, leg, etc.) and make it operate in the required way.

In the computer, the decision making, processing, and instruction generation part is called the CPU (Central Processing Unit); the storage part is the ROM (Read Only Memory = memory for only reading) or RAM (Random Access Memory = read/write portion); and the body corresponds to the I/O (I/O Interface = input/output devices).

To give a comprehensive name to all these electric circuits and functions, we use the term "computer".

There are however the following differences between the human brain and a computer.

- (1) In the computer storage, matters once memorized will not be forgotten.
- (2) The computer cannot make decisions regarding any non-stored information.
- (3) In speed of processing or decision making, a computer is much faster.
- (4) The computer cannot store as much as the human brain.

1) CPU

The CPU is the most important part of a computer and assumes a central role. Considering the CPU as a digital circuit, by applying a signal "we want to read contents of an address" at the input, the requested contents are output in response to the instruction. In other words the CPU carries out the processing taking out a sequential processing program from the program into which the instructions were entered and decoding the instructions.

In this device, a 4-bit CPU is employed. The 4-bit CPU is more suitable for system control rather than that for computations.

SONY
SERVICE MANUAL

The CPU configuration in this device consists of a PC (Program Counter), STACK, DP (Data Point), ACC (Accumulator), ALU (Arithmetic Logic Unit). Each of these will be described below.

(a) PC (Program Counter)

This is a register which stores the address of the contents of the ROM to be processed next, so that the execution sequence of the program will be correctly followed.

Each time after executing one instruction, this is increased by + 1.

(b) STACK

This is a register for storing aside the contents of the PC when a subroutine is called or during interrupts.

(c) DP (Data Point)

This is a register which specifies the address of RAM.

(d) ACC (Accumulator)

This is a register for storage of the operation results of ALU or as a temporary storage external to the CPU.

(e) ALU (Arithmetic Logic Unit)

This is the arithmetic logic operation unit, which has functions of binary addition, increment, decrement, exclusive OR, comparison, etc.

2) Memory (Storage device)

(a) ROM (Read Only Memory)

This memory is only for reading. The following are the features of ROM. (1) It is difficult to modify the stored contents because it is impossible to rewrite the contents of ROM by a program. (2) Even if the power source is cut off, the contents stored in a ROM will not be erased. Utilizing these features, the ROM stores the data which should not change. Further, when no data is needed, the power dissipation can be made lower by switching off the power source.

In this device a 1000 word x 8-bit mask ROM is employed for storing the program, etc., and is addressed by the PC.

The features of a mask ROM.

- (1) The chip size is smaller than that of a RAM.
- (2) It is suitable for storing considerable data of the same pattern.
- (3) It can be cheaper than a P-ROM in mass manufacture.

(b) RAM (Random Access Memory)

This is a memory in which data can be recorded or can be read out at any position in any sequence by specifying the address and the bit. In this microcomputer, data is stored in a 64 x 4-bit static RAM and is addressed by DP (Data Point).

The features of the static RAM.

- (1) The power dissipation per bit is high.
- (2) Operation speed is slow.
- (3) Because data does not get erased with time, refreshing is not needed.

2. Programming

A program is a description of the sequence of operations to be followed by the computer expressed in a language that the computer can comprehend, and which is based on the basic functions possessed by the computer.

The language which the computer can understand is called the "machine language". The machine language descriptions are those that the computer can decode immediately and execute, and are expressed with the combination of "0" and "1". However, the machine language can be different for different computers.

Because the machine language is very much different from the English language, it is translated into an assembler language, and is expressed with mnemonics (these express instruction words, with letters which function as a mnemonic aid).

Some examples of descriptions in the machine language and in the assembler language employed in this micro-computer are given below.

Machine Language	Assembler Language	Contents of Operation
1010 0000	CLA	ACC ← 0 (Contents of the accumulator are cleared)

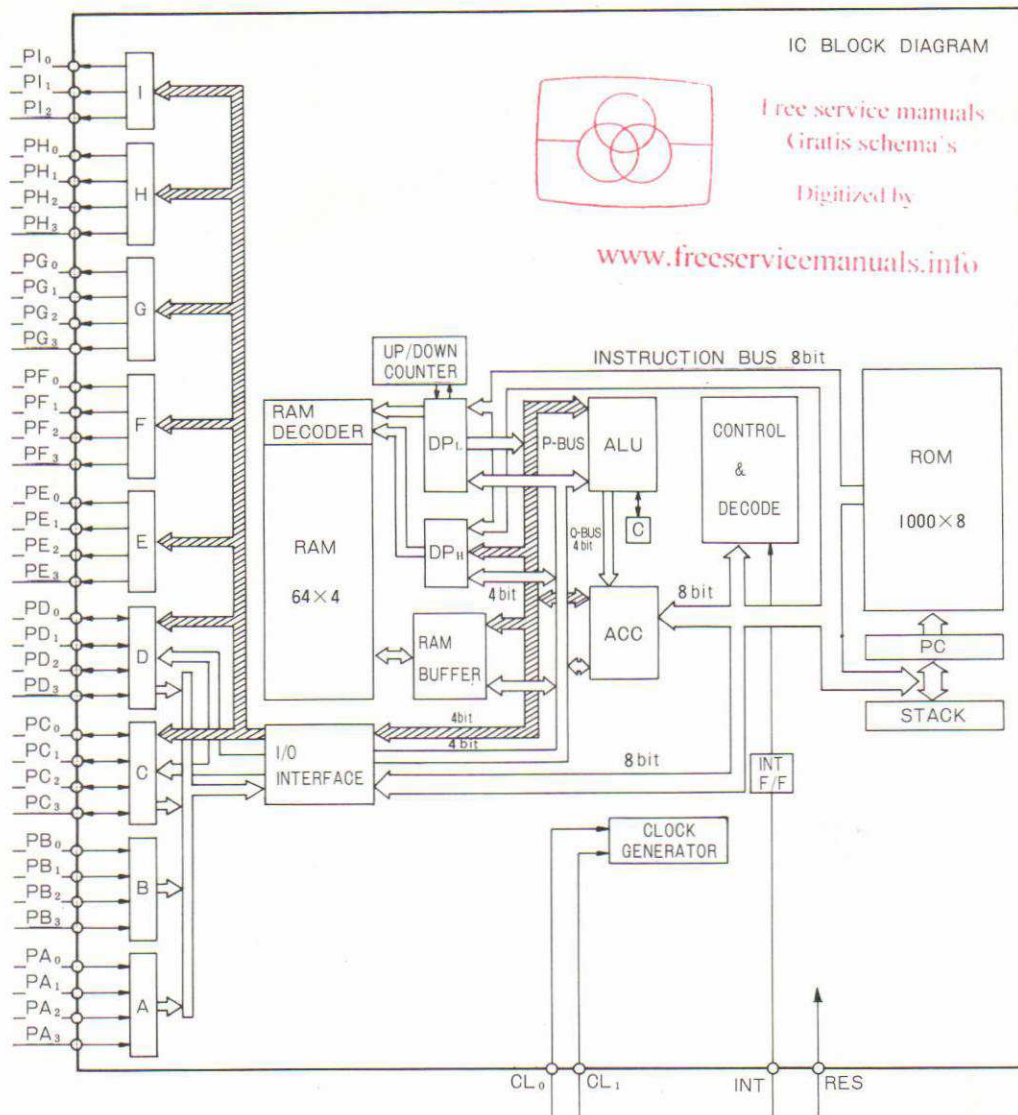


Fig. 1

3. Flow Chart

The flow chart expresses graphically the operating procedures and their functional implications.

The operations that we want the computer to do are written in accordance with the processing procedure.

(When a program is written, the flow-chart is very frequently written since the pictorial representation facilitates defining and arranging the problem.)

A part of the operations in this micro-computer will be explained by means of the flow chart and the program.

SYMBOLS USED

ADDRESS Contents of PC

OBJECT CODE . . . Machine Language (binary notation)

DATA Machine Language (hexadecimal notation)

INSTRUCTION . . . Assembler Language (mnemonic)

() Contents of Register

[(XX)] Contents of Memory Addressed by (X X)

← Transfer Direction, Result

FLOW CHART

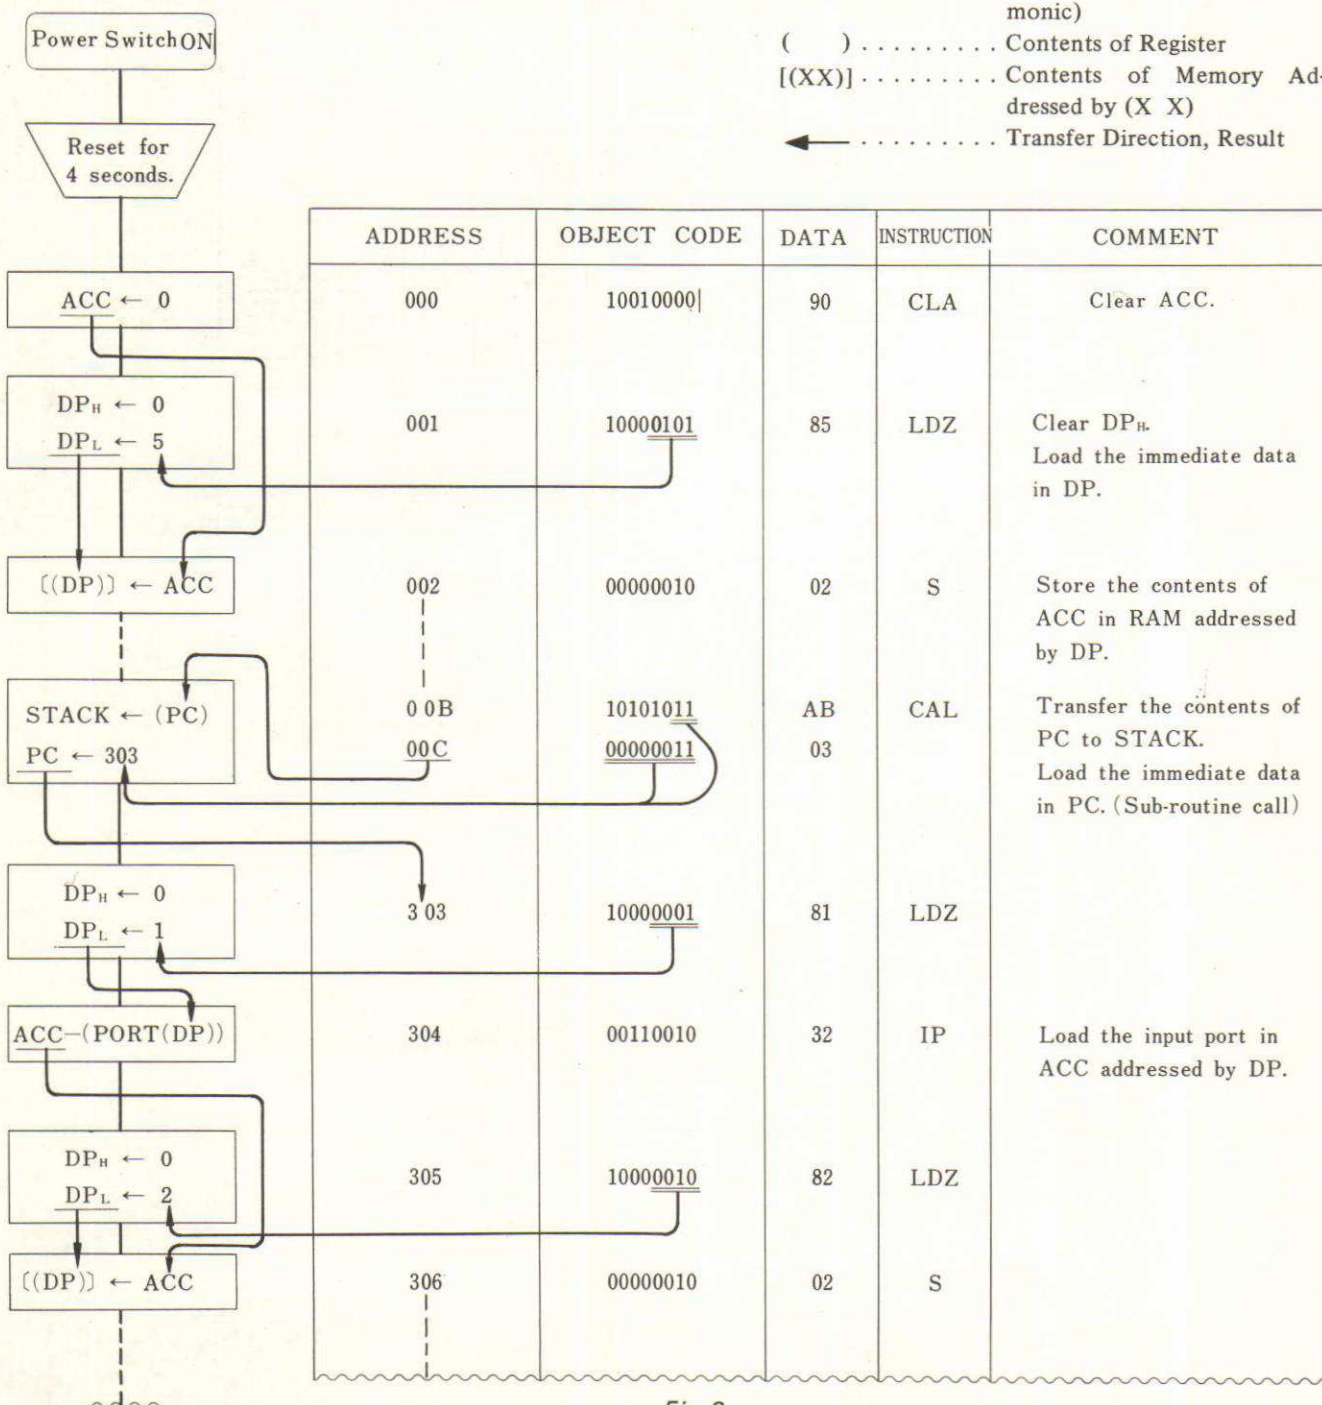


Fig. 2

4. Specifications of IC μ PD547-022

- P channel MOS, one chip microcomputer for control
- 42 pin plastic DIP
- 58 instructions
- ROM 1,000 x 8 bit
- RAM 64 x 4 bit
- Instruction circle: 10 μ sec (clock = 400 kHz)

5. Calculation

1) Addition 0010.....(2)

+ 0101.....(5)

0111.....(7)

2) Subtraction 1001.....(9) 1111

- 0101.....(5) $\Rightarrow$ - 0101.....(5)

0100.....(4) 1010

+ 1

1011.....(Complement)

$\downarrow$

1001.....(9)

+ 1011.....(Complement of 5)

1 0100.....(4)

$\rightarrow$ Disregard

3) Increment and carry

1111

+ 1.....(Increment)

1 0000

$\rightarrow$ Carry

4) Decrement and borrow

0000

- 1.....(Decrement)

1111

$\rightarrow$ Borrow

5) Exclusive OR

0 + 0 = 0

0 + 1 = 1

1 + 0 = 1

1 + 1 = 0

6. I/O Port

Port: Point of electrical access to a system or circuit


Port	DP	Bit [() = IC Terminal No.]				
		0	1	2	3	
A ₀	0	REW switch (33)	PAUSE switch (34)		STOP switch (36)	(I ₁ =0, I ₁ =1)
A ₁	0	REC switch	REV switch	FWD switch (35)	FF switch	(I ₀ =1, I ₁ =0)
B	1	HEAD FWD (37)	REV erasure-proof switch (38)	FWD erasure-proof switch (39)		
C	2	MEMORY switch STOP (2)	MEMORY switch PLAY (3)	TIMER switch REC (4)	TIMER switch PLAY (5)	
D	3	TAPE COUNTER switch (8)	MODE switch  (9)	MODE switch — (10)	SHUT OFF (11)	
E	4	REV lamp (12)	FWD lamp (13)	FF lamp (14)	REW lamp (15)	
F	5	REC MUTE (16)	PLAY MUTE (17)	PAUSE lamp (18)	REC lamp (19)	
G	6		BRAKE SOLENOID (PM2) (23)	HEAD SOLENOID (PM1) (24)	REC bias (25)	
H	7	KICK (26)	REEL MOTOR Speed Select (27)	REEL MOTOR ON/OFF (28)	CAPSTAN MOTOR ON/OFF (29)	
I	8	A SELECT (30)	A SELECT (31)	REEL MOTOR FWD/REV (32)		

Fig. 3

7. TERMINALS (Except I/O Port)

TERMINAL	TERMINAL No.	FUNCTION
CL1	(1)	CLOCK OSC OUTPUT
CL0	(42)	CLOCK OSC INPUT
INT	(6)	CAPSTAN MOTOR FG INPUT
RES	(7)	POWER ON/OFF INPUT
TEST	(20)	CONNECTED TO (21)

*Fig. 4***8. RAM (Random Access Memory = Read out/Write in)**

Address	0	1	2	3
¥ 0	REW switch	PAUSE switch		STOP switch
¥ 1	REC switch	REV switch	FWD switch	FF switch
¥ 2	HEAD FWD	REV erasure-proof switch	FWD erasure-proof switch	
¥ 3	MEMORY switch STOP	MEMORY switch PLAY	TIMER switch REC	TIMER switch PLAY
¥ 4	TAPE COUNTER switch	MODE switch 	MODE switch 	SHUT OFF
¥ 5	REV MODE	FWD MODE	FF MODE	REW MODE
¥ 6			PAUSE MODE	REC MODE
¥ 7	REC(ON/OFF)	TAPE COUNTER OFF→ON	TAPE COUNTER ON→OFF	
¥ 8	REC(ON/OFF)	6 COUNT		
¥ A	REPEAT	6 COUNT		
¥ B	FG COUNTER(High)			
¥ C	FG COUNTER(Low)			
¥ D	REC CHECK	FG COUNT and DATA INPUT		
¥ E	INPUT ON	INPUT CHECK		
¥ F	PAUSE CHECK			
¥ 10	DATA INPUT BUFFER (A0) • FG COUNT			
¥ 11	DATA INPUT BUFFER (A1) • FG COUNT			

Fig. 5

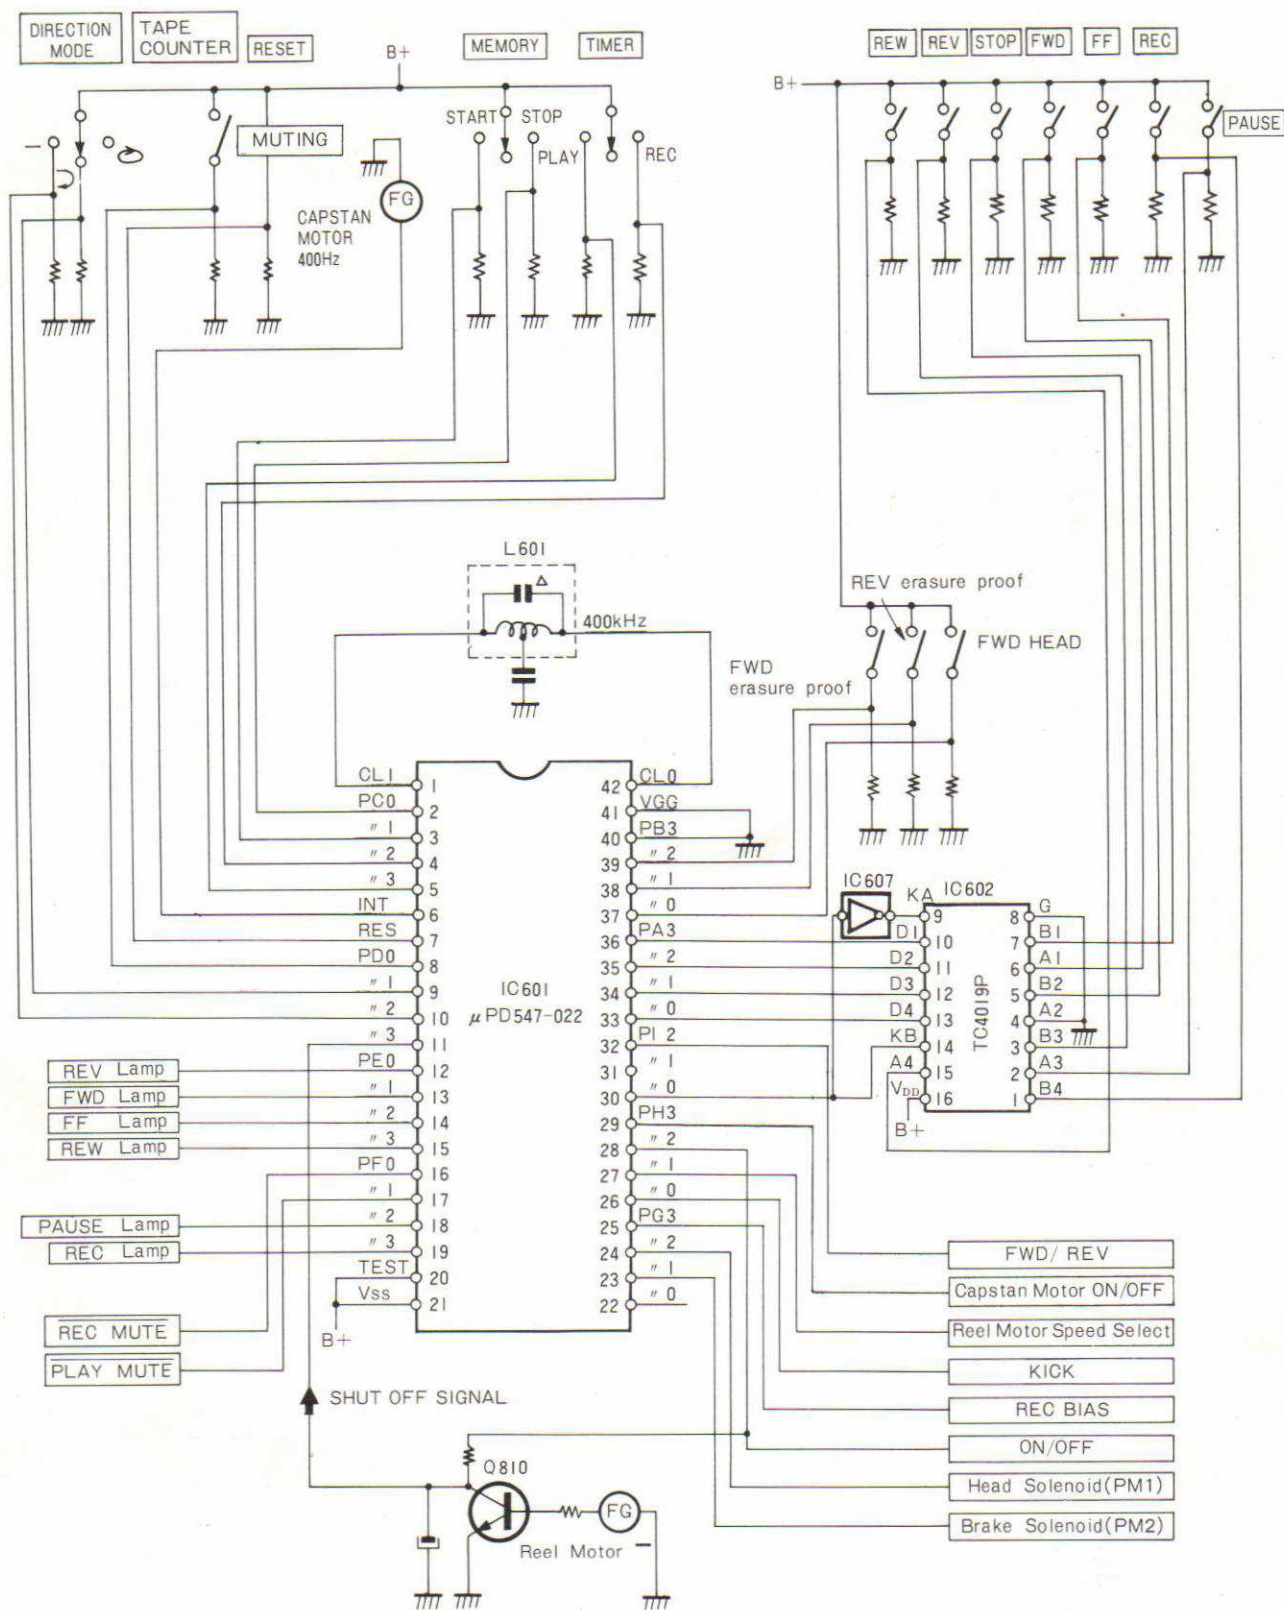


Fig. 6

9. IC INPUT/OUTPUT Timing Chart in Each Operation

1. Priority in Input Multiple Button Operations

STOP > REW > FF > FWD > REV
 STOP, REW, FF > REC, PAUSE

2. Input Inhibiting Condition

REC Inhibit in REW, FF, FWD, REV
 PAUSE Inhibit in REW, FF

3. Timing Chart in Each Operation

Note: When the KICK signal has been put out at the beginning of one operation (herein, operation A), even if another operation signal (herein, operation signal B) is given it (the operation signal B) will be stored within and the operation B will be carried out after the KICK output is reset.


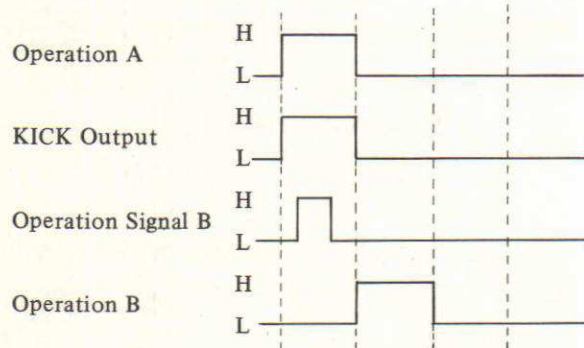


Fig. 7

The numerals in the timing chart of each part are the number of inputs of INT (FG input of the capstan motor is 400 Hz).

The encircled numbers are terminal numbers in the IC.

1) When POWER switch is turned on

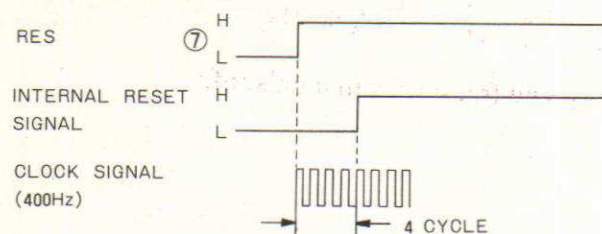

After 4 cycle of clock signal, all of output terminals are reset.

Fig. 8

2) When STOP button is depressed.

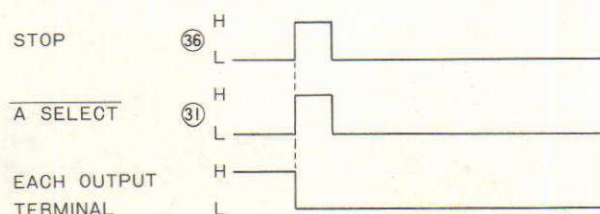


Fig. 9

3) When REW button is depressed.

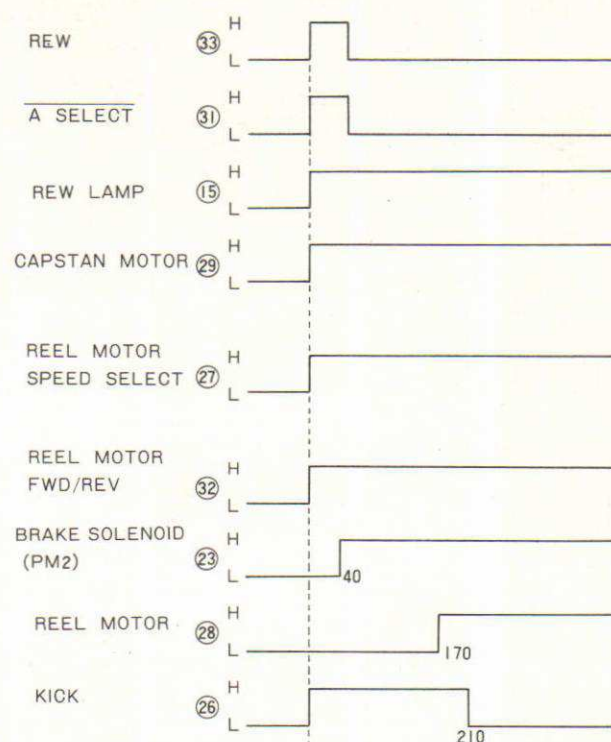


Fig. 10

4) When FF button is depressed.

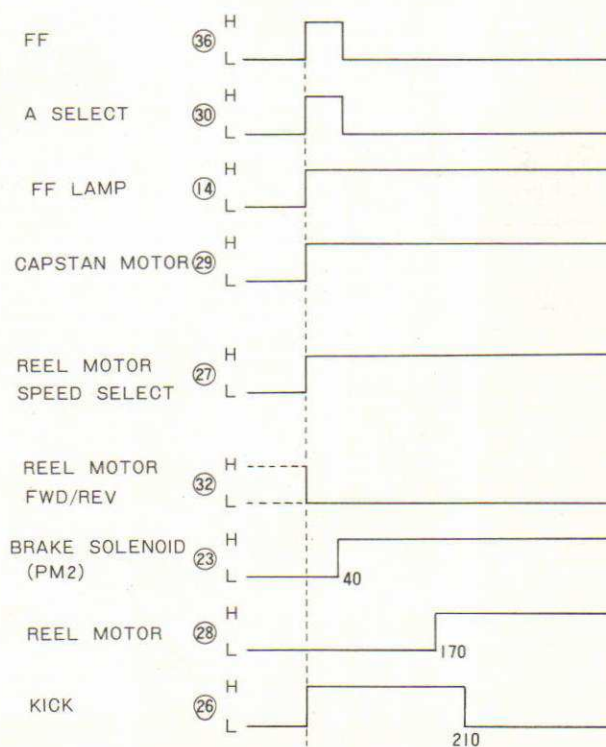


Fig. 11

5) When FWD button is depressed.

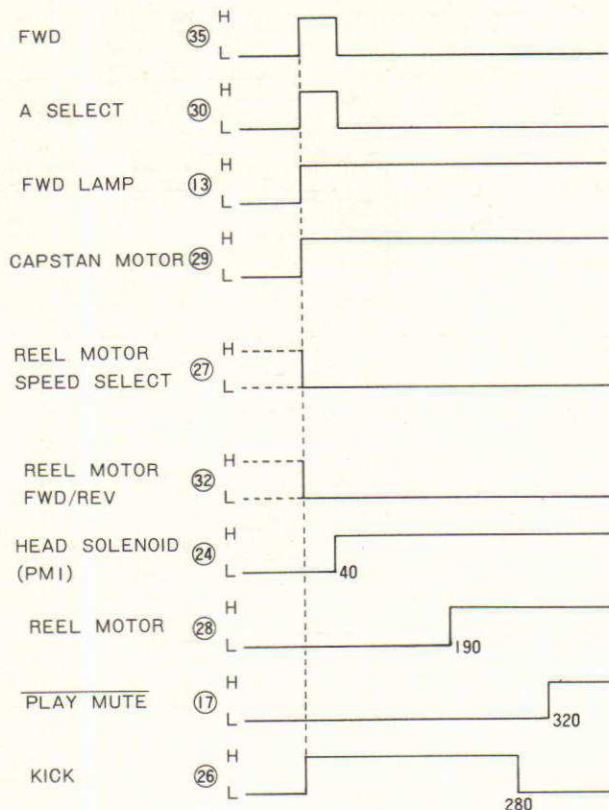


Fig. 12

6) When REV button is depressed.

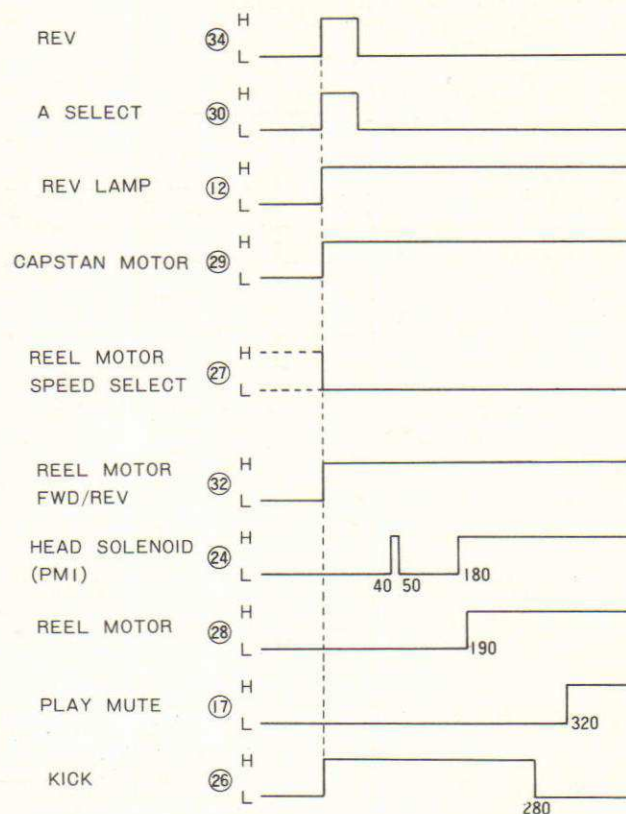


Fig. 13

7) When REC button is depressed.

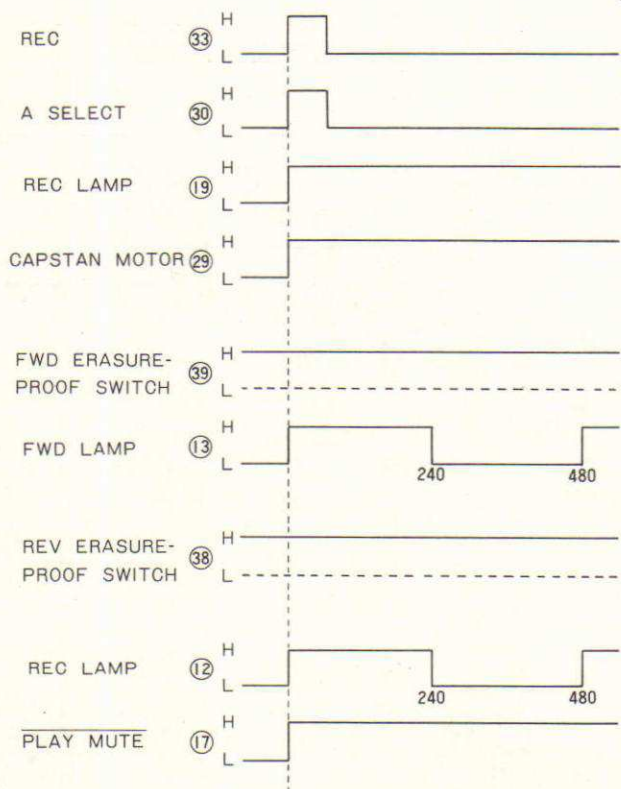
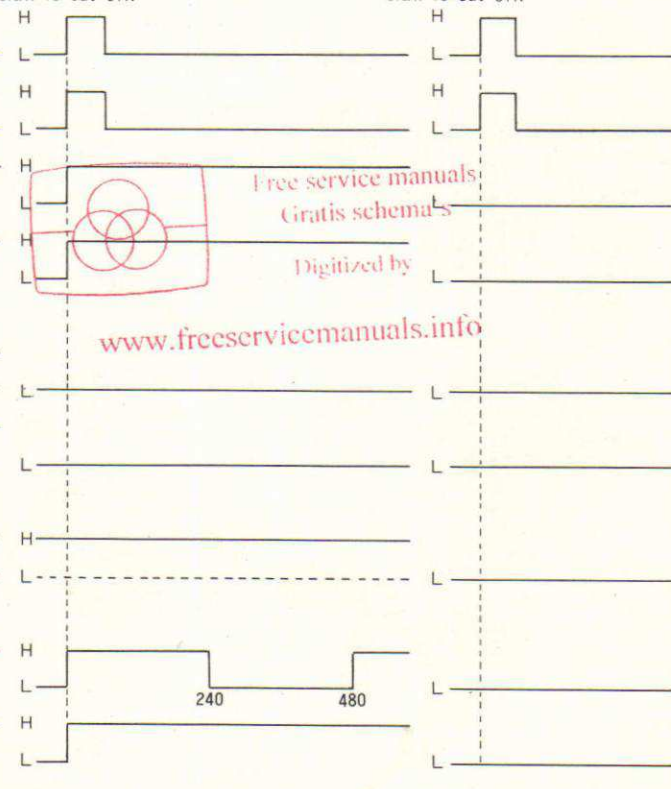
FWD accidental erasure-proof
claw is cut off.FWD • REV accidental erasure-proof
claw is cut off.

Fig. 14

8) When REC•FWD button is depressed.

When REC • REV button is depressed in PAUSE mode.

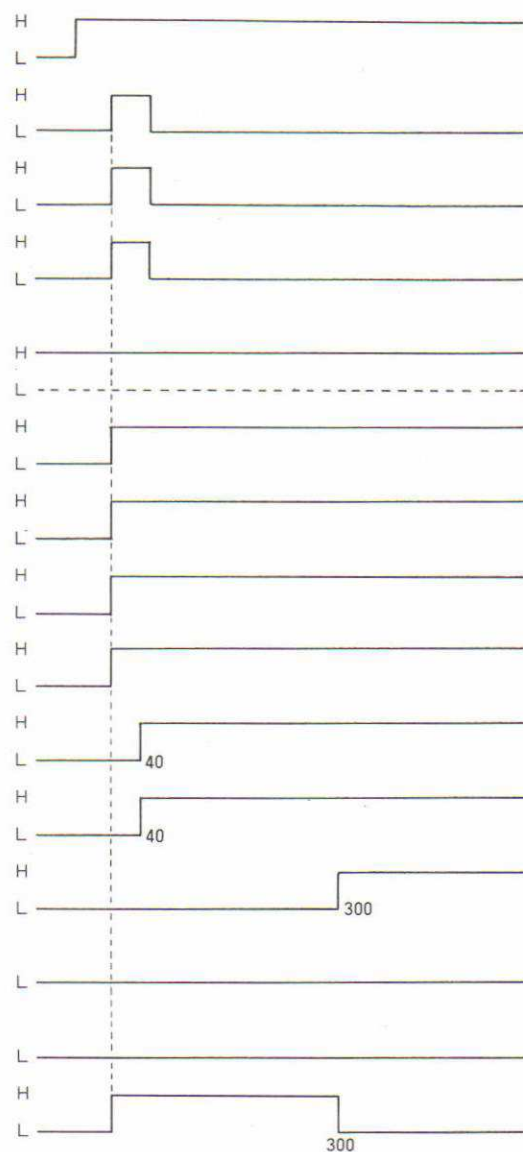
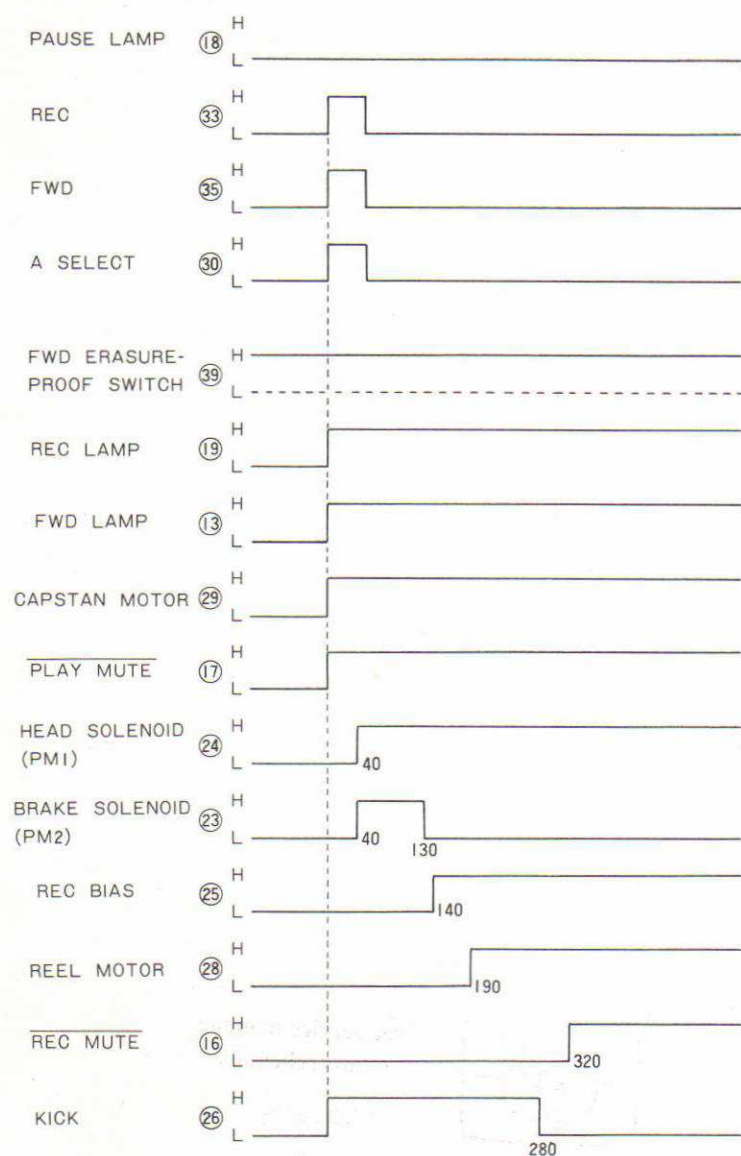


Fig. 15

9) When REC•REV button is depressed.


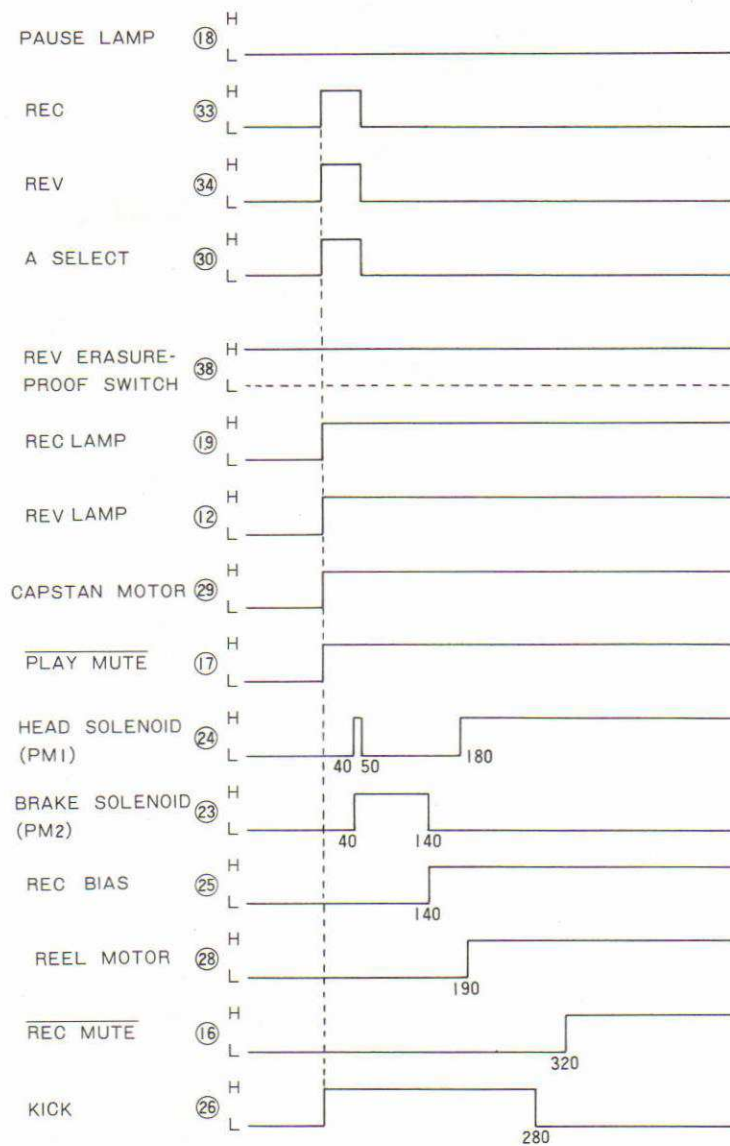



Fig. 16

When REC•FWD button is depressed in PAUSE mode.

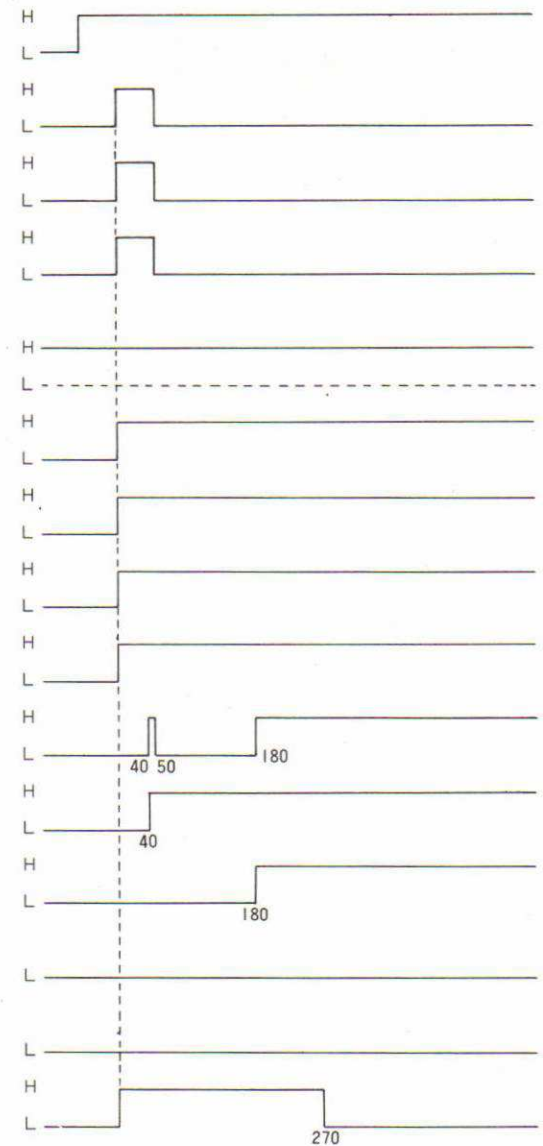

10) When PAUSE button is depressed.

(a) Depress PAUSE button in STOP mode.

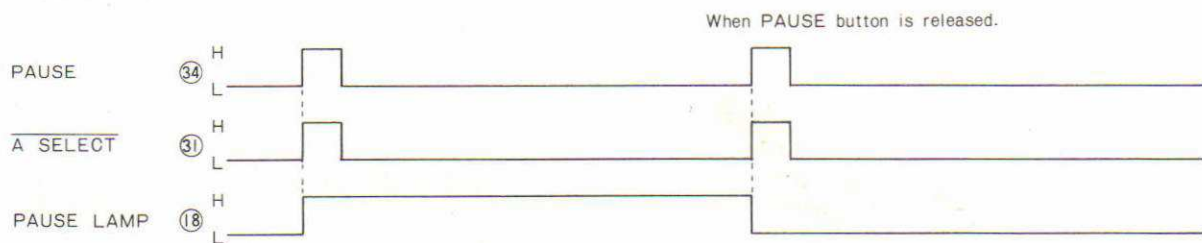

When PAUSE button is released.

Fig. 17

(b) Deress PAUSE button in FWD, REW, REW • FWD or REC • REV mode.

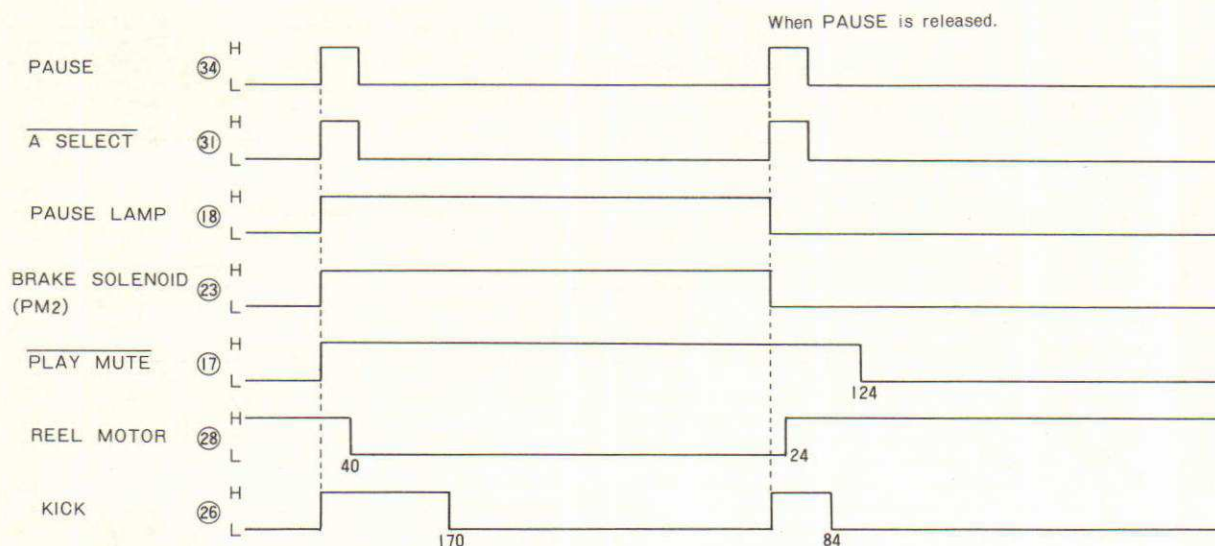


Fig. 18

11) When FWD or REV button is depressed in PAUSE mode.

(a) When FWD button is depressed.

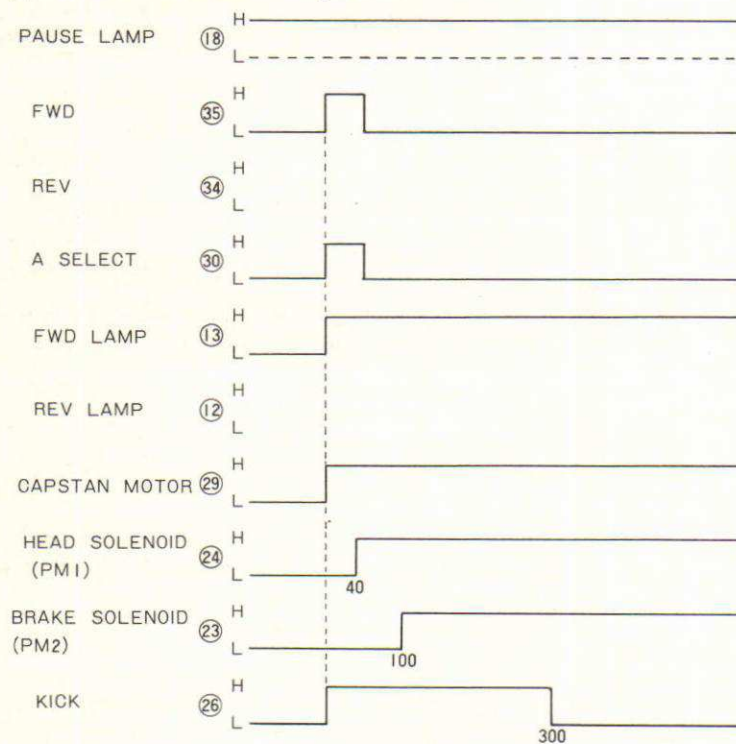


Fig. 19

(b) When REV button is depressed.

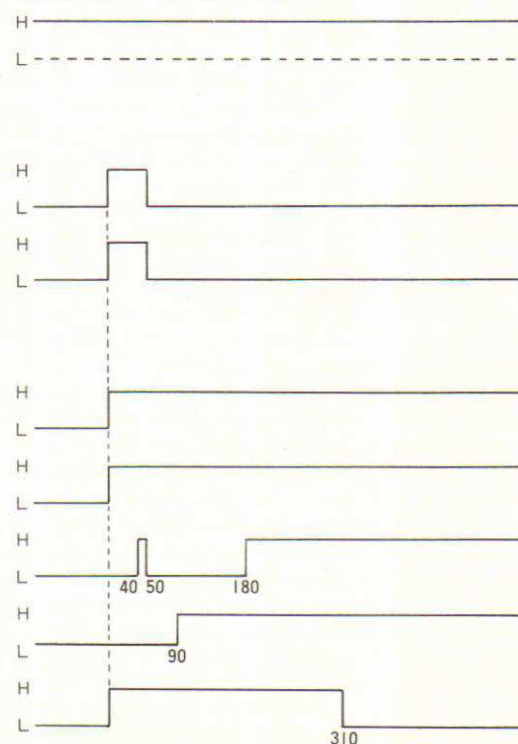


Fig. 20

12) MEMORY switch

When the tape counter indicates "999" from "000" or "000" from "999" during FF or REW mode, the set stops or starts to play.

(a) Depress REW button in FWD mode.

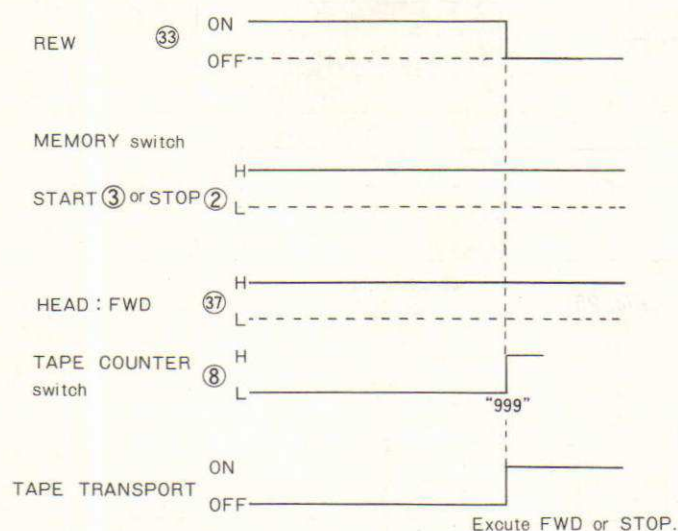


Fig. 21

(b) Depress FF button in REV mode.

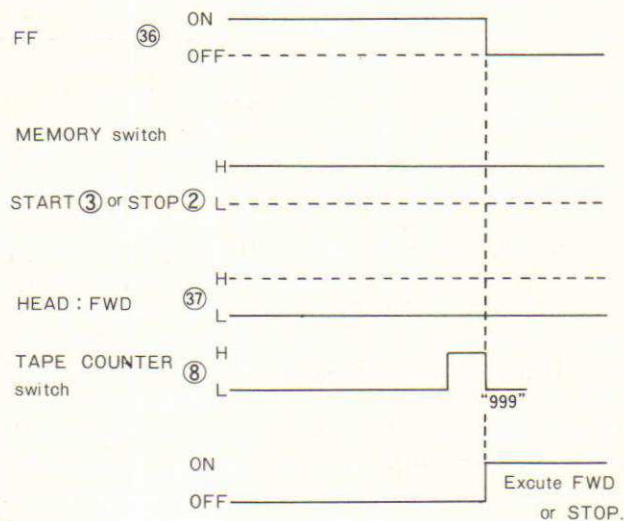


Fig. 22

13) SHUT OFF

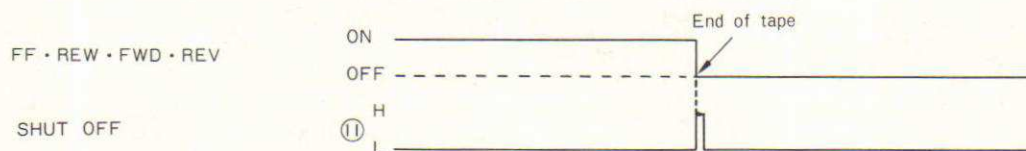


Fig. 23

14) MODE switch select

(a) MODE switch: — position

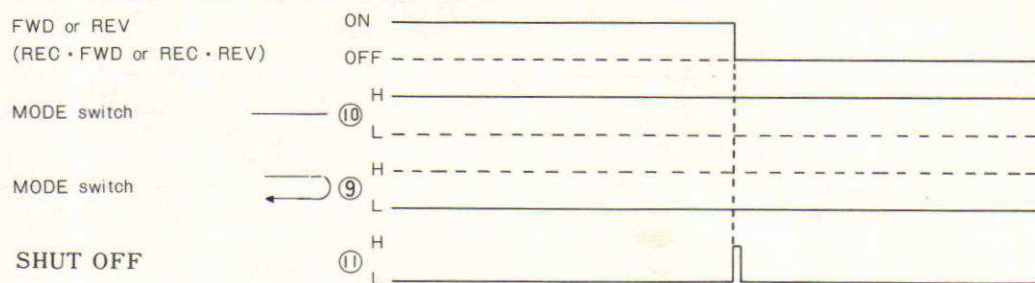


Fig. 24

(b) MODE switch :  position

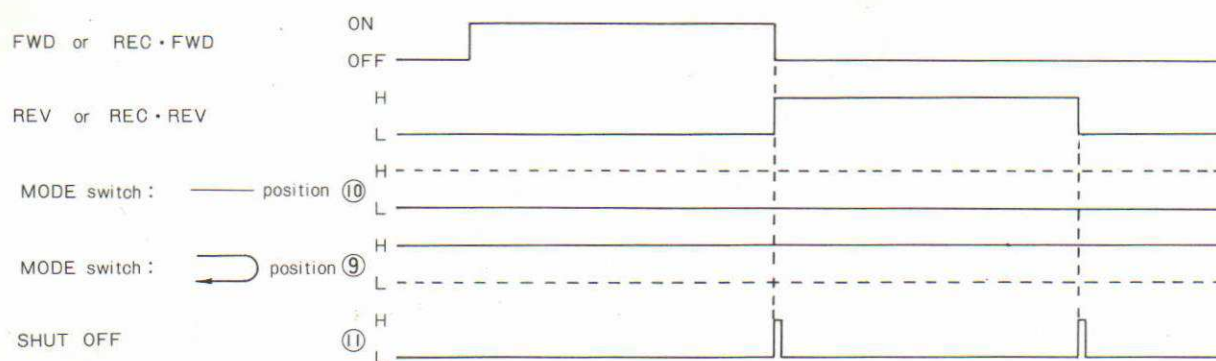


Fig. 25

(c) MODE switch :  position

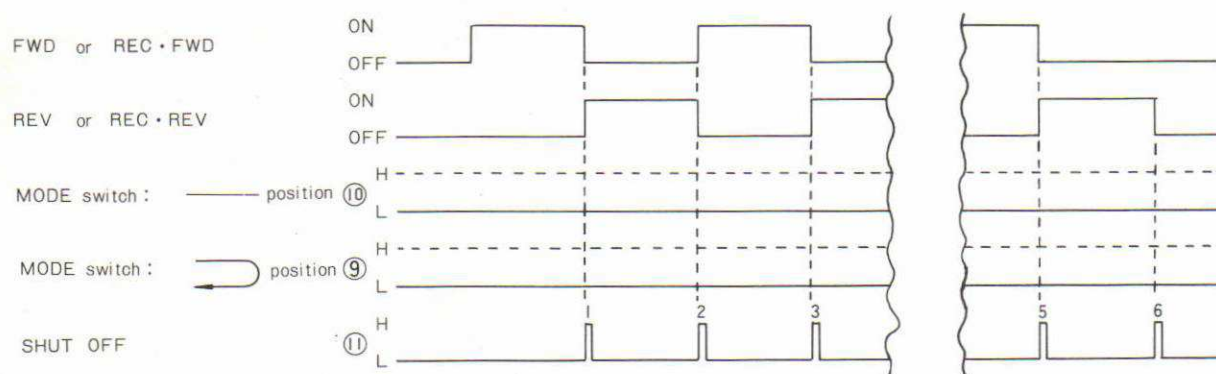


Fig. 26

15) TIMER·REC or TIMER·PLAY

(a) TIMER·REC

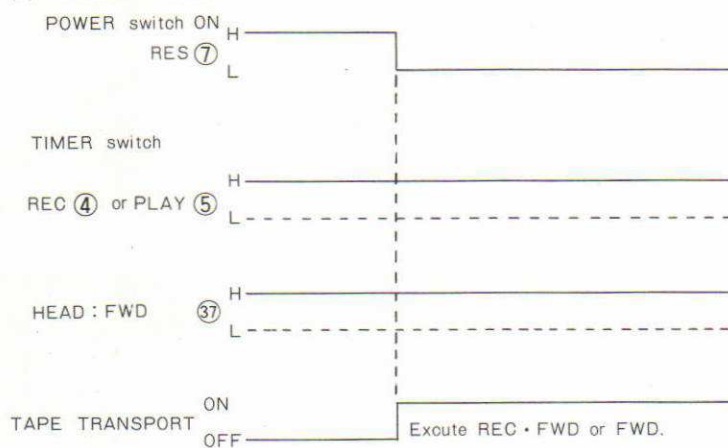


Fig. 27

(b) TIMER·PLAY


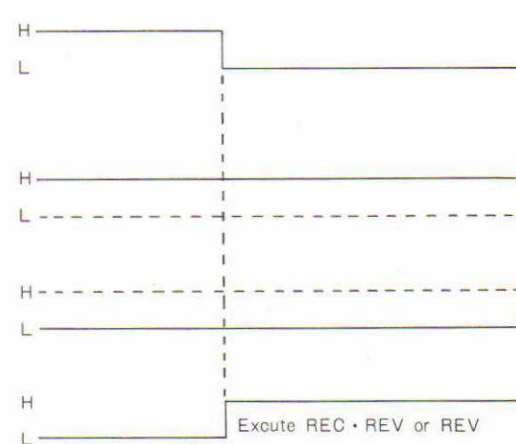


Fig. 28

10. SYSTEM CONTROL CIRCUIT

An outline of the micro computer was given in Chapter 1 ~ 3. An explanation of the system control circuit of this device will now be given.

The system control circuit in this device is composed of the following blocks built around the micro-computer (IC601).

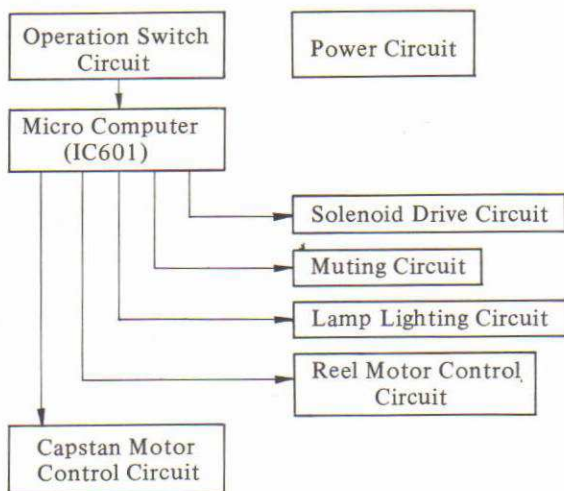

The IC601 sends out the output signals of ON (HIGH)/OFF (LOW) to each block corresponding to the input signals from the operation switches or from the reel or capstan motor control circuits.

An explanations of each of the blocks follows:

1) FUNCTION Switch Circuit

- (a) The signals for the five operations of REW, REV, STOP, FWD, FF are sent out on two lines from the FUNCTION switches. The priority level is determined by the switch arrangement and the resistor values.

The OP amplifier in Fig. 29 is employed as a comparator circuit. When the switch is off, because the potential of the (−) terminal is higher than that of the (+) terminal in the OP amplifier input, the output of the OP amplifier goes to the low potential level.

Next, when the switch is on, because the potential of the (+) terminal is higher than that of (−) terminal, the output of the OP amp goes to HIGH.


Here five OP amplifiers are combined and the voltages of the (−) terminals of the OP amplifiers are compared when the switches are pressed and then the mode of operation is decided.

(Example) When STOP switch (S12) is pressed: When S12 is pressed, the outputs of IC1~5 go HIGH. However, since Q624~627 are turned on, the outputs of IC1~4 will be muted, and only the output of IC5 (STOP signal) will be effective output.

- (1) Drive Table for IC1~5, Q624~627

- (2) (When IC output is high-potential ⇒ 0) When it is low-potential → X

Switch	IC1	IC2	IC3	IC4	IC5	Q624	Q625	Q626	Q627
STOP	0	0	0	0	0	ON	ON	ON	ON
REW	0	0	0	0	X	OFF	ON	ON	ON
FF	0	0	0	X	X	OFF	OFF	ON	ON
FWD	0	0	X	X	X	OFF	OFF	OFF	ON
REV	0	X	X	X	X	OFF	OFF	OFF	OFF

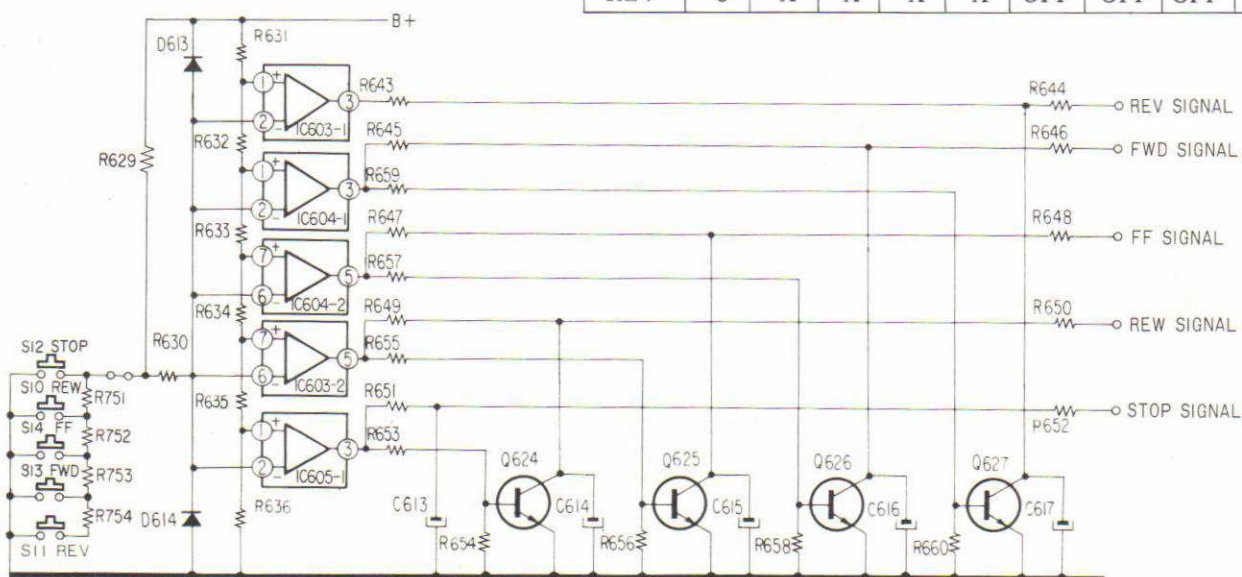

- (b) The modes of REC and REC MUTE in recording are determined by the OP amplifiers as in (a). (Fig. 30)
- When the REC MUTE switch (S17) is pushed, the output of IC6 goes HIGH generating the REC MUTE signal.
 - When the REC switch (S15) is pushed, the outputs of IC6.7 go HIGH. However, since Q611 is turned on, the output of IC6 is muted, and only the REC signal is output.
 - When the REC switch (S15) and REC MUTE switch (S17) are simultaneously pushed, outputs of IC6.7 go HIGH, and the output of IC8 goes LOW. Therefore, the REC MUTE signal, which has been muted by Q611 during recording will have its muting condition released because Q611 is turned off by D617 IC8.
- (c) The PAUSE circuit operates independently by switching Q631 in order to prevent chattering.

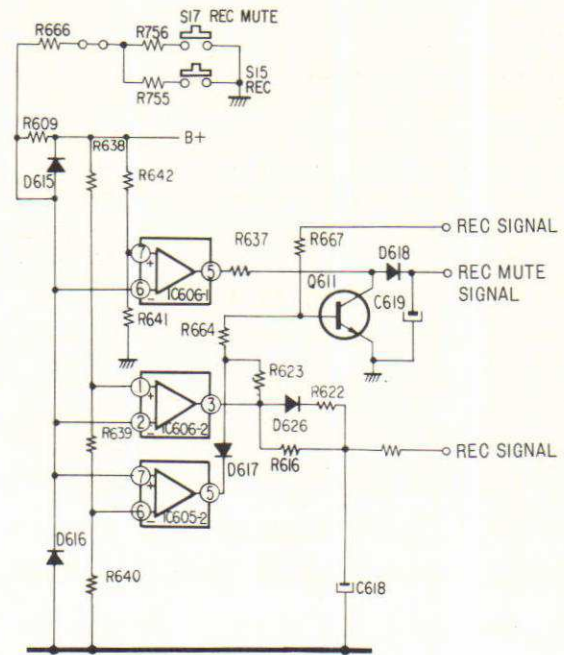


Fig. 30

2) Muting Circuit

- (a) In the STOP, FF and REW modes, since PLAY MUTE of IC601 goes LOW. Q609 will be turned off, the muting signal will be applied to Q110.111 (210, 211), and LINE OUT will be muted.
- (b) In FWD.REV, since PLAY MUTE of IC601 goes HIGH, Q609 is turned off, and the muting will be cancelled.
- (c) Q610 is the muting circuit for delayed recording.

- (d) Q618 is turned on by the REC MUTE signal from the operation switch circuit, and PL10 lights up. Further, since Q618 goes on, and the REC MUTE signal from IC601 goes grounded via D623, Q603 will be turned off, and because the REC MUTE signal gets applied to Q114(214), consequently the recording signal will be muted.

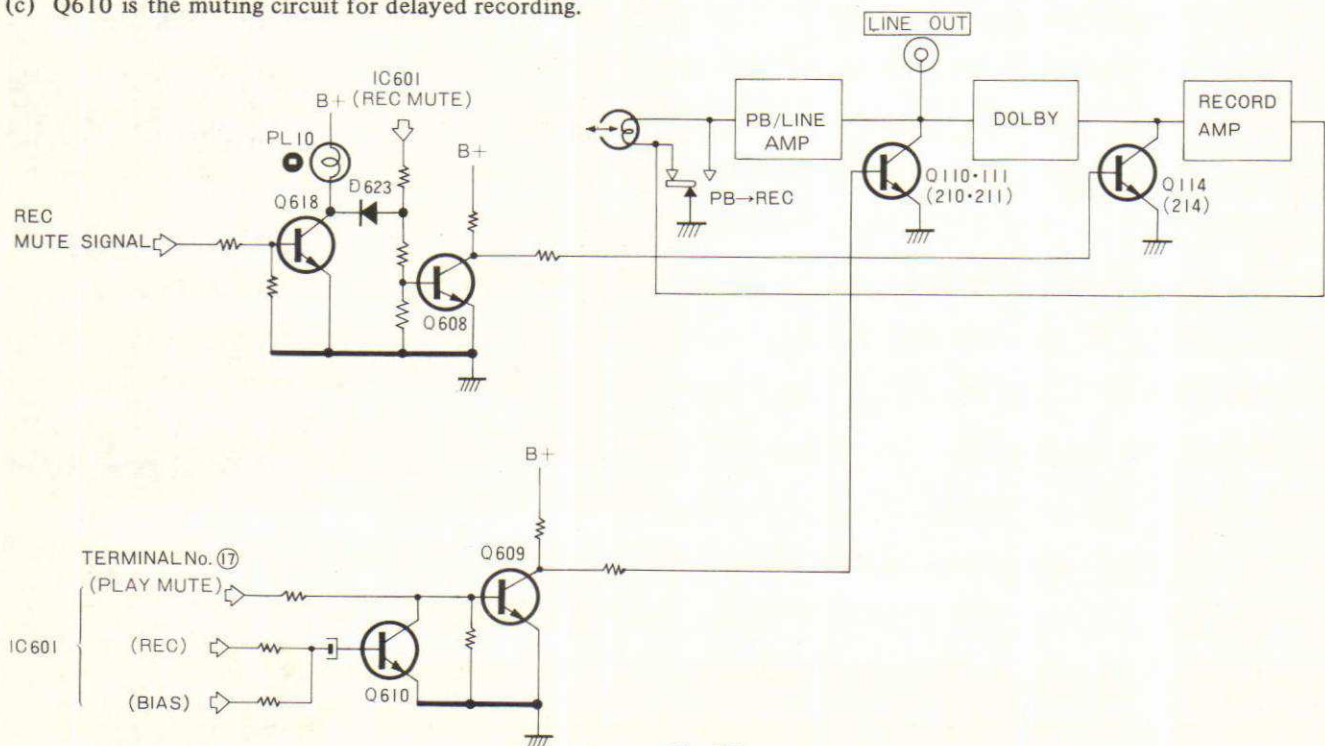


Fig. 31

3) Power Circuit, Solenoid drive

- (a) Reset when the power switch is turned on or off
- When the power switch is turned on: for three seconds when the supply voltage charges C624 through R703, the Schmitt circuit formed by the inverters (IC602) operates and sends the reset signal to IC601.
 - When the power switch is turned off: because C624 discharges due to the fall in the primary voltage, the Schmitt circuit operates and sends the reset signal to IC601.
- (b) The solenoids (PM1,2) are driven by the signals PM1, PM2 from IC601, via the Darlington amplification circuits of Q619, 620, Q621, 622. The solenoids are driven by HIGH voltage level only while retracting because Q607, 606 are turned on by the KICK signal sent simultaneously with the signals PM1, PM2. This is to prevent excessive heat generation.

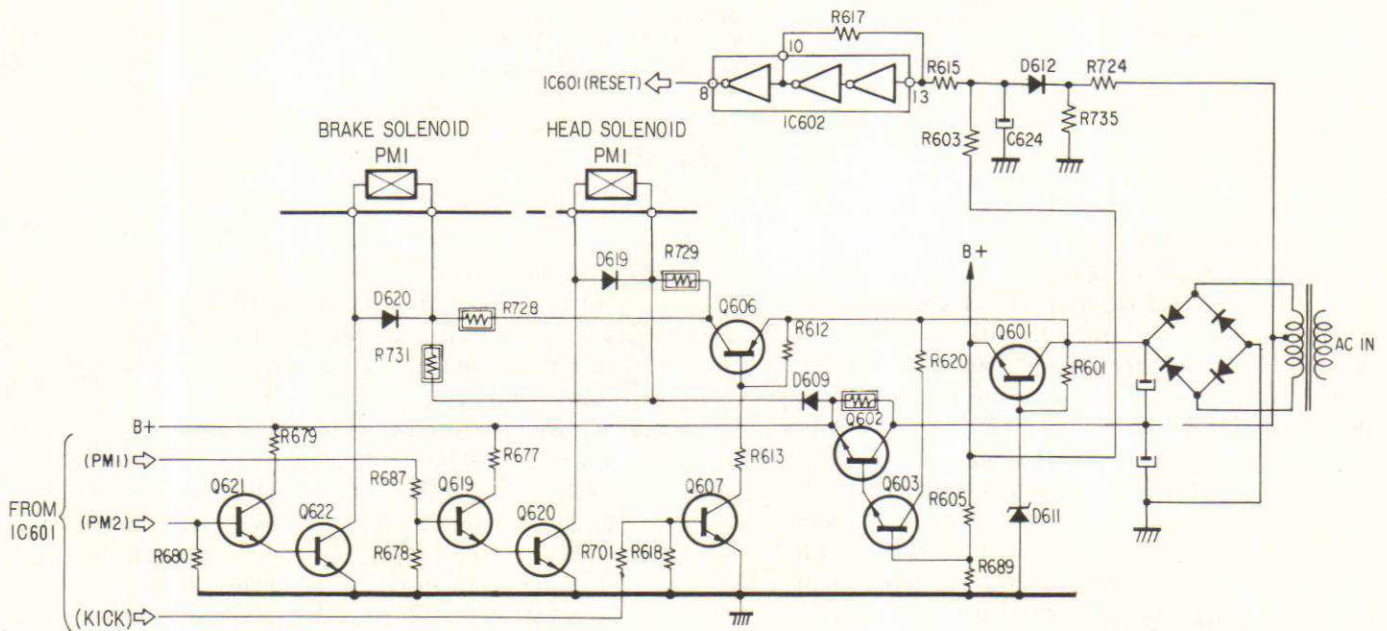


Fig. 32

4) Capstan Motor FG Signal Circuit

The FG frequency of the capstan motor is 133 Hz. For this purpose, pulses are generated by Q806, 807 at the rise and fall of the output waveform at terminal No.2 of IC801. Further, the motor output signal $\phi 1$ is wave-shaped in the comparison circuit of the operational amplifier (IC804), and pulses are generated at its rising edge. These pulses are added producing pulses with three times the frequency (about 400 Hz) from the fundamental FG frequency (133 Hz).

The FG pulses of 400 Hz generated in the servo circuit are used as the fundamental frequency for IC601 (micro-computer) after being shaped and adjusted in time phase by a Schmitt circuit made up of inverters.

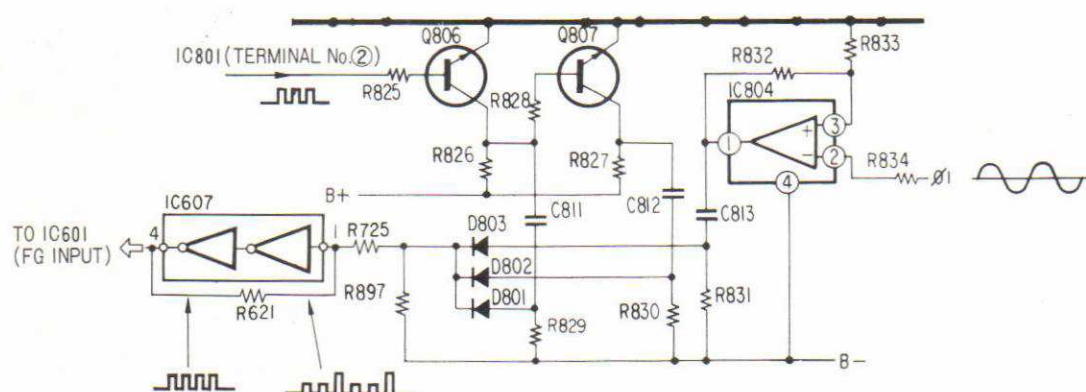


Fig. 33

5) Reel Motor Control Circuit

The OP amplifier (IC804) generates output voltages of positive, 0, negative with respect to the virtual ground this is not chassis ground, but has a potential of +10V). As a result, the reel motor (BSL) rotates in the forward or reverse directions in accordance with the output potential of the OP amplifier.

(a) FWD/REV Switching of the Reel Motor

Due to the reel motor signal FWD/REV from IC601, Q809 will be turned off in FWD and FF modes, B+ is applied to the (+) terminal of IC804, and the output of the OP amplifier becomes positive.

Next, in the REV and REW modes, because Q809 is turned on, the potential of the (+) terminal of IC804 becomes lower than that of (-) terminal, and the output of the OP amplifier goes negative. As a result, by turning on or off Q809, the rotating direction of the reel motor will be reversed.

(b) ON/OFF Switching for Reel Motor

When the reel motor is off, Q811 is turned on due to the signal ON/OFF of the reel motor, so that the output of the OP amplifier becomes 0 volts, and the reel motor does not rotate.

(c) Magnetic Brake in FF/REW of Reel Motor

When the reel motor is rotating, C814 is charged to B+ or B-. Because this capacitor discharges to imaginary ground when the reel motor stops (Q811 = ON), a voltage opposite in polarity to that during rotation will be applied to the (+) terminal of the OP amplifier.

Consequently, the reel motor tries to rotate in the opposite direction, and hence this operates as a brake which stops quickly the rotation in the FF, REW modes.

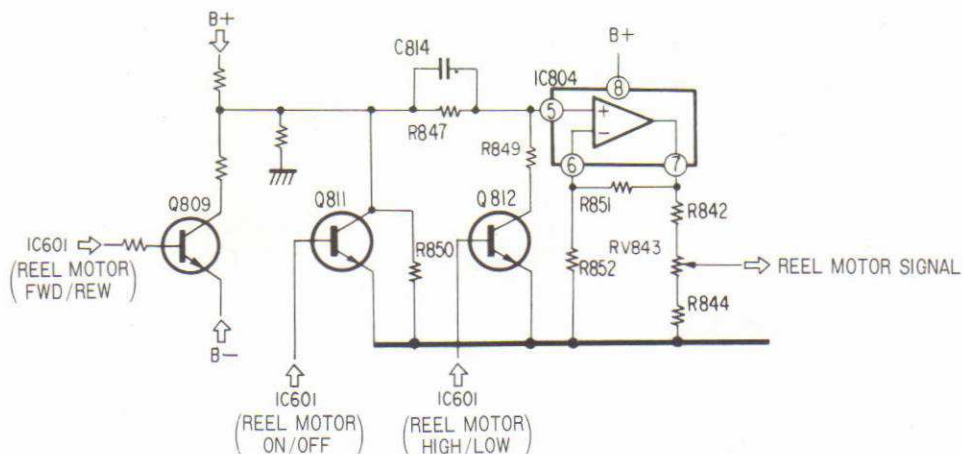


Fig. 34

6) BSL (brush and slotless) motor

- (a) The BSL motor, which employs the hall element as an electronic switcher, has the low noise and the stable performance.


Hall Element:

The magnetic field strength is converted into electrical signals by employing the Hall Effect.

Hall Effect:

When a metal strip is placed with its plane perpendicular to a magnetic field and an electric current flows longitudinally through the strip, a potential difference is developed across the strip at right angles to the current flow and to the magnetic field.

The potential is proportional to amounts of the current and a strength of the magnetic field.

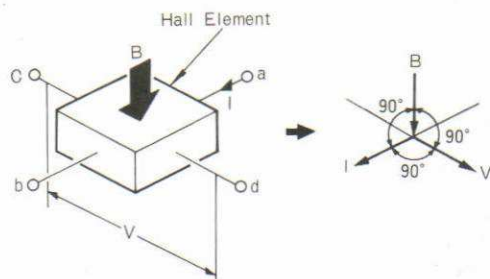

When the current I flows through the hall element (a-b), the potential V is developed across c-d.

Fig. 35

- (b) BSL motor and its drive circuit.

The motor magnet is magnetized in 8 poles (sinusoidal patterns).



The constant current I is supplied to the hall element H1.

When the H1 comes to the N pole of the magnet, the voltage is generated in the H1.

This voltage is fed to IC803-1 and Q815 turns on. Therefore, the current $\phi 1$ is supplied to the motor coils through Q815.

At this moment, by the Fleming's left-hand rule, the magnetic force (F) is produced in the motor coils.

And the magnet rotates in the opposite direction of the magnetic force, since the motor coils are fixed.

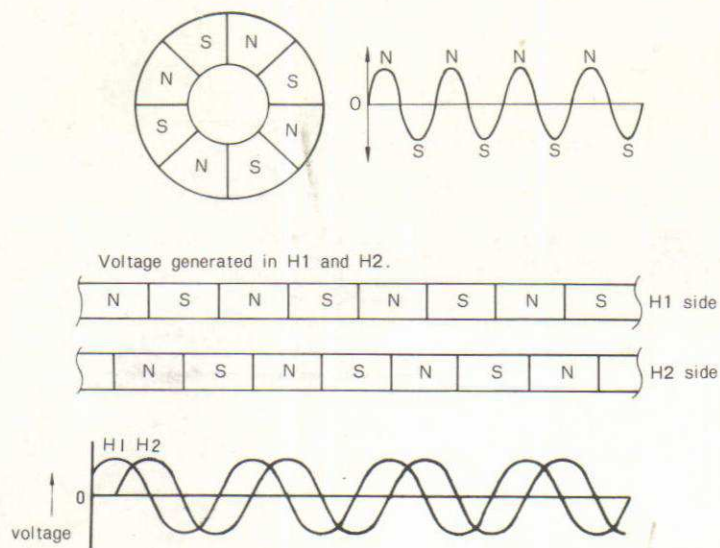

Free service manuals
Gratis schema's
Digitized by

www.freeservicemanuals.info

